

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PROBORT, ILLINOIS

FED. MFR. CODE 91929

ASSEMBLY- TOGGLE SWITCH

CATALOG LISTING

13AT2-E

13AT2-E
PAGE 1 OF 1

M

DRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO. SR 10718

CHECK

REVISIONS

A	SR10718	
7	JAN 63	
B	CO28982	
R	C	R
19	MAY 71	
C	CO	50566-B
5	WJM	MAY 82
D	CO	52725
S	L	8
2	JUN 83	
E	CO66089	
DAW	8 FEB 91	
F	CO-	92636
G	GJW	16 DEC 98
G	206956	
MDM	26 NOV 02	

CHECK

DAW

CHECK


DEC 61

DEC 8

DEC 8

DEC 8

DEC 8

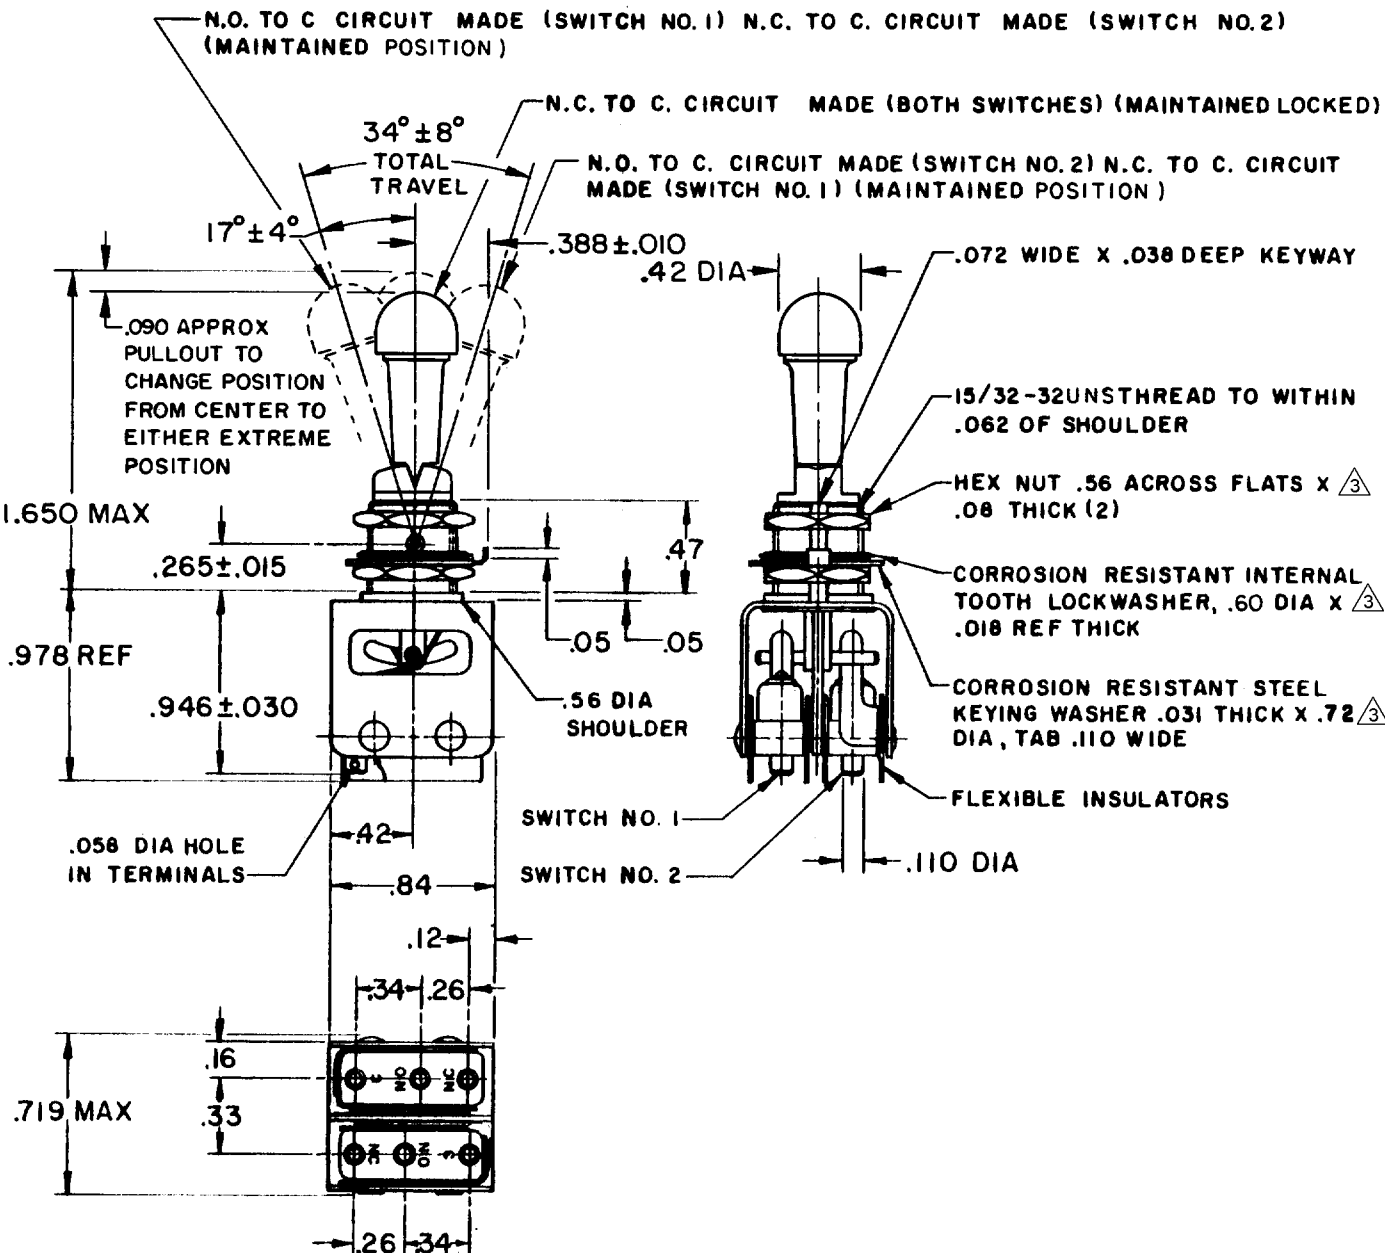

NOTES

- 1 - UNIT INCLUDES CAT. LIST. 1SM1 TYPE BASIC SWITCH (2)
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET PER MIL-PRF-8805
- 4 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA312-AT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

CONTACT ARRANGEMENT
S P D T (2)

DO NOT SCALE PRINT

250 VAC — — — — — 5 AMP

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

30 VOLTS DC RATING

INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP

50,000 FT — — — 2.5 AMP

RESISTIVE — — — — — SEA LEVEL — — — 5 AMP

50,000 FT — — — 5 AMP

MAXIMUM INRUSH — — — — — 24 AMP

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .06 LB

RASTER

FO-80378

DRAWN