
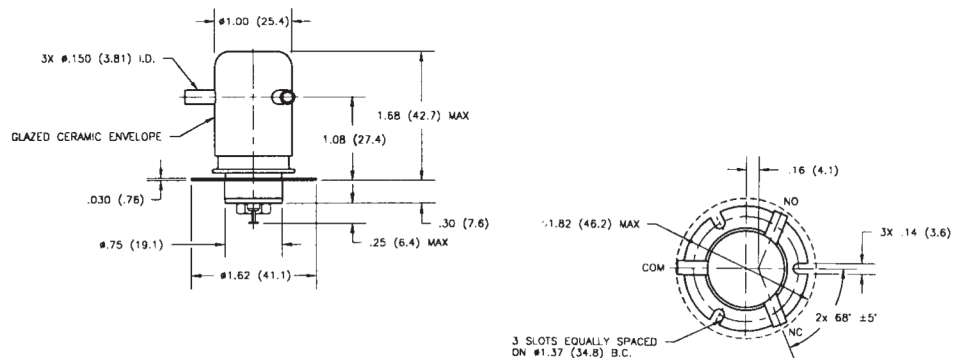


KC Series Make & Break Load Switching — 15 kV Relays



KC-14



KC-18

Product Facts for KC-14 and KC-18

- Specifically designed for load switching applications
- Can power switch and isolate loads
- Replaces KILOVAC KC-8 and KC-12
- Meets requirements of MIL-R-83725

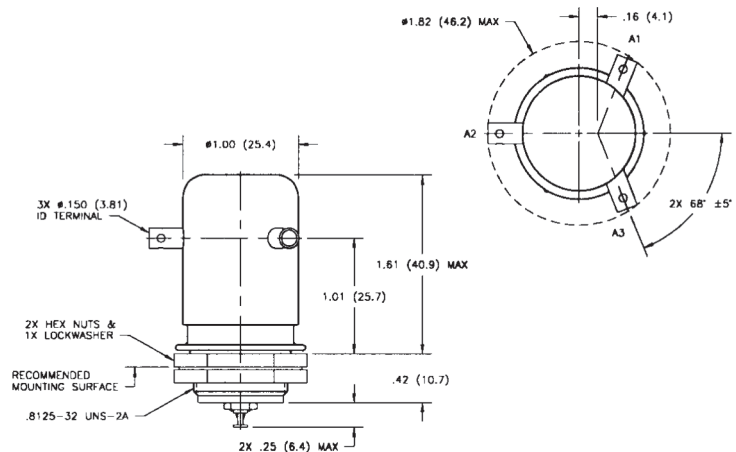

Product Specifications for KC-14 and KC-18

- Contact Arrangement** — SPDT
Contact Form — C
Test Voltage, DC or 60 Hz (Peak) — 17 kV
Rated Operating Voltage (Peak) — DC or 60 Hz — 15 kV
Continuous Carry Current, Max. — DC or 60 Hz — 30 A
 Coil Hi-Pot (Vrms, 60 Hz) — 500 A
Contact Capacitance — Between Open Contacts — 0.5 pF
 Open Contacts to Ground — 1 pF
Contact Resistance, Max. — 0.025 ohm
Operate Time, Max. — 15 ms
Release Time, Max. — 9 ms

For factory-direct application assistance, dial 800-253-4560, ext. 2055, or 805-220-2055.

Shock, 11ms, 1/2 Sine (Peak) — 50 g

Vibration — Peak — 10 g (55 to 500 Hz)

Operating Ambient Temperature Range — -55°C to +125°C

Mechanical Life — 1 million cycles

Weight, Nominal — 85 g (3 oz.)

*Hot Switching, Resistive Load Life

Voltage	Current	Load Life Operations
330 Vdc	17 Amps	10,000
330 Vdc	5 Amps	100,000
5,000 Vdc	2 Amps	100,000
10,000 Vdc	1 Amps	50,000

*Ratings are for normally open contacts only. No testing has been performed on normally closed contacts.

Coil Data

Volts, Nominal DC	12 V	26.5 V	115 V
Pickup, Max.	8 Vdc	16 Vdc	80 Vdc
Dropout	.5-5 Vdc	1-10 Vdc	5-50 Vdc
Coil Resistance (±10%)	48 Ω	180 Ω	2900 Ω

Ratings listed are for 25°C, sea level conditions

Ordering Information

Sample Part Number ►

Series:

Model:

14

18

Coil Voltage:

Blank = 26.5 Vdc /12Vdc = 12 Vdc /115Vdc = 115 Vdc

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[KC-18/12VDC](#) [KC-14/12VDC](#) [KC-14](#) [KC-18/S7](#)