





4

3

2

1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	FI	REV.BY ECO 16-003733	11MAR2016	HC	WLS

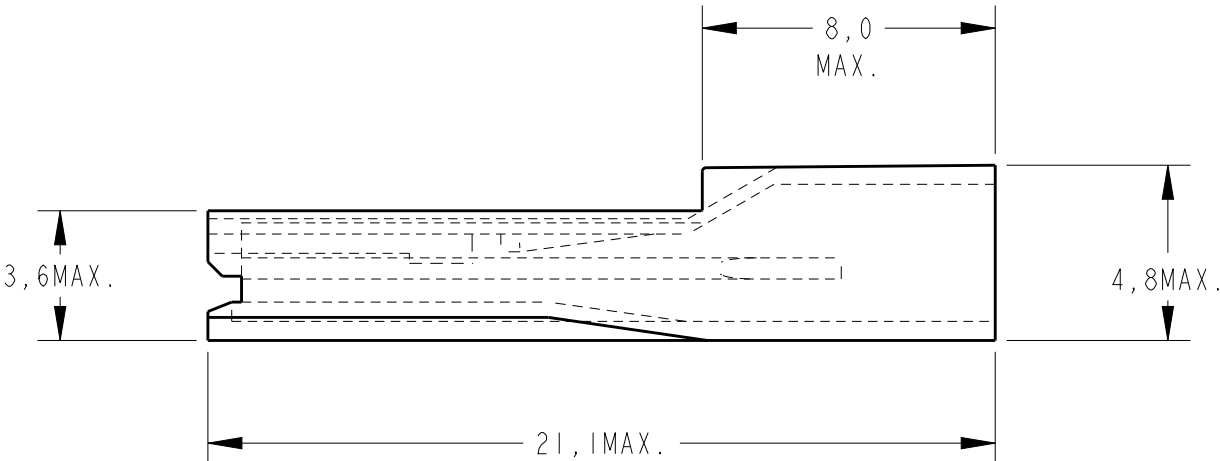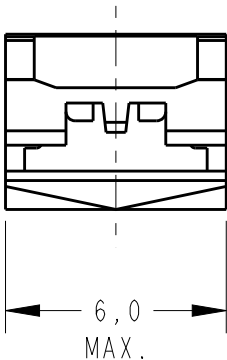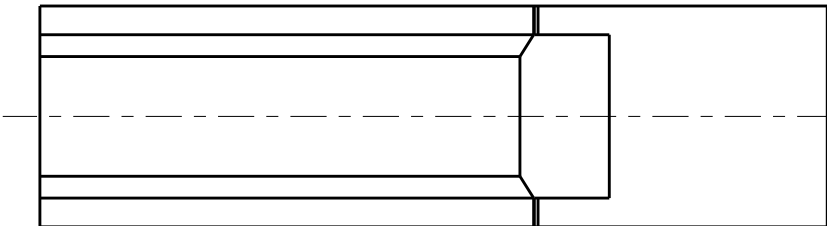

 -MATÉRIA PRIMA CONFORME ESPECIFICAÇÃO IEC 60335-1, GWT 750°, SEM CHAMA.
RAW MATERIAL ACC. TO SPEC IEC 60335-1, GWT 750°C, WITHOUT FLAME.

	NATURAL	 - PA 6.6 V-0	141628-5
	PRETO / BLACK	PA 6.6 V2 ESTABILIZADO AO CALOR	141628-4
OBSOLETE	AMARELO / YELLOW	PA 6.6 94 V2	141628-3
	NATURAL	PA 6.6 94 V2	141628-2
OBSOLETE	NATURAL	PA 6.6 94 V1	141628-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±-

1 PLC ±0,3

2 PLC ±-

3 PLC ±-

4 PLC ±-

ANGLES ±-

FINISH

-

DWN
H.C.CANTER1
29JAN2016

CHK
W.L.STEFANI
29JAN2016

APVD
-
29JAN2016

PRODUCT SPEC
108-37094

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

 TE Connectivity

NAME
FASTON REC. HSG. .110 SERIES

SIZE
A3

CAGE CODE
-

DRAWING NO
C-141628

RESTRICTED TO
-

SCALE
5:1

SHEET
1

OF
1

REV
FI