

SAC-5P-MINMR/ 0,3-928/MINFS DN

Order No.: 1417731

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1417731>

Bus system cable, 5-position, PVC, Gray RAL 7001, Plug, angled 7/8" 16UNF, on Socket, straight 7/8" 16UNF, Cable length: 0.3 m

**Commercial data**

GTIN (EAN)	4046356540056
Note	Made-to-order
sales group	D117
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.22222 KG
Catalog page information	Page 149 (NTK-2010)

Product notes

WEEE/RoHS-compliant since:
03/12/2010



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**


Rated current at 40°C	5.2 A
Rated voltage	30 V
Number of positions	5
Volume resistance	< 5 mΩ
Length of cable	0.3 m

General characteristics

Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material of grip body	TPU
Material, knurls	High-grade steel
Sealing material	TPU
Status display	No

Diagrams/Drawings

Dimensioned drawing

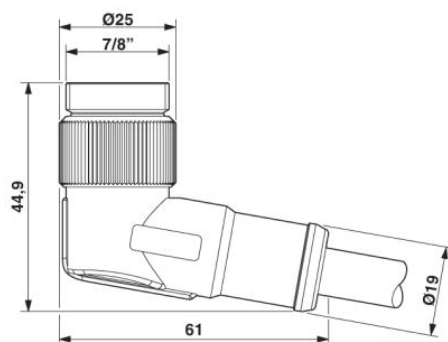


7/8"-16UNF connector, angled


Circuit diagram

Contact assignment of the 7/8" connector and the 7/8" socket

Schematic diagram

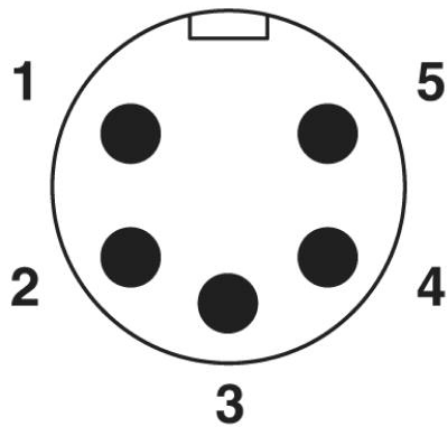

Connector pin assignment for 7/8"-16UNF conn., 5-pos.

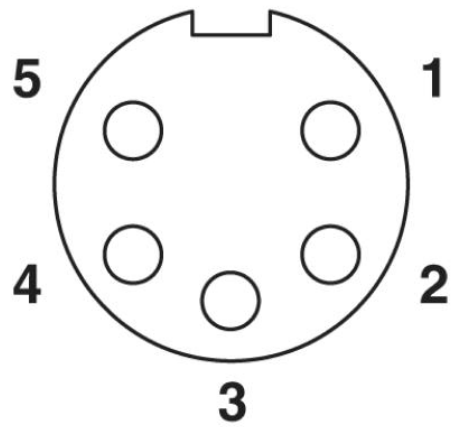

Pin assignment, socket, 7/8"-16UNF, 5-pos., view of female side

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;