


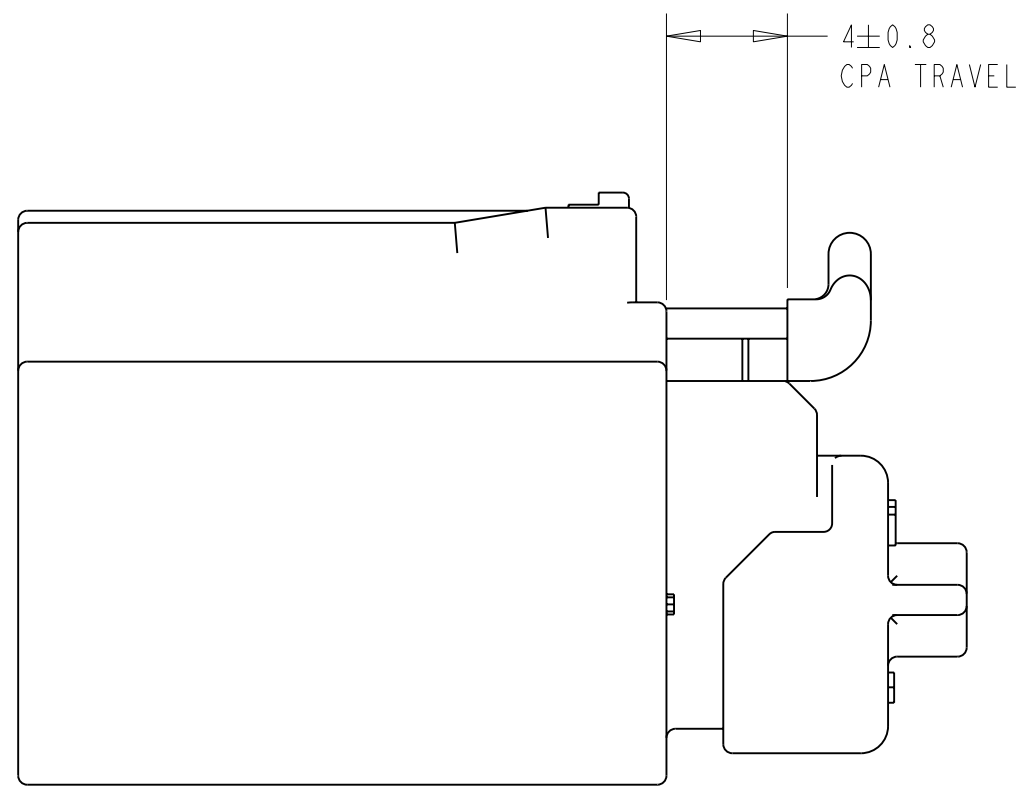


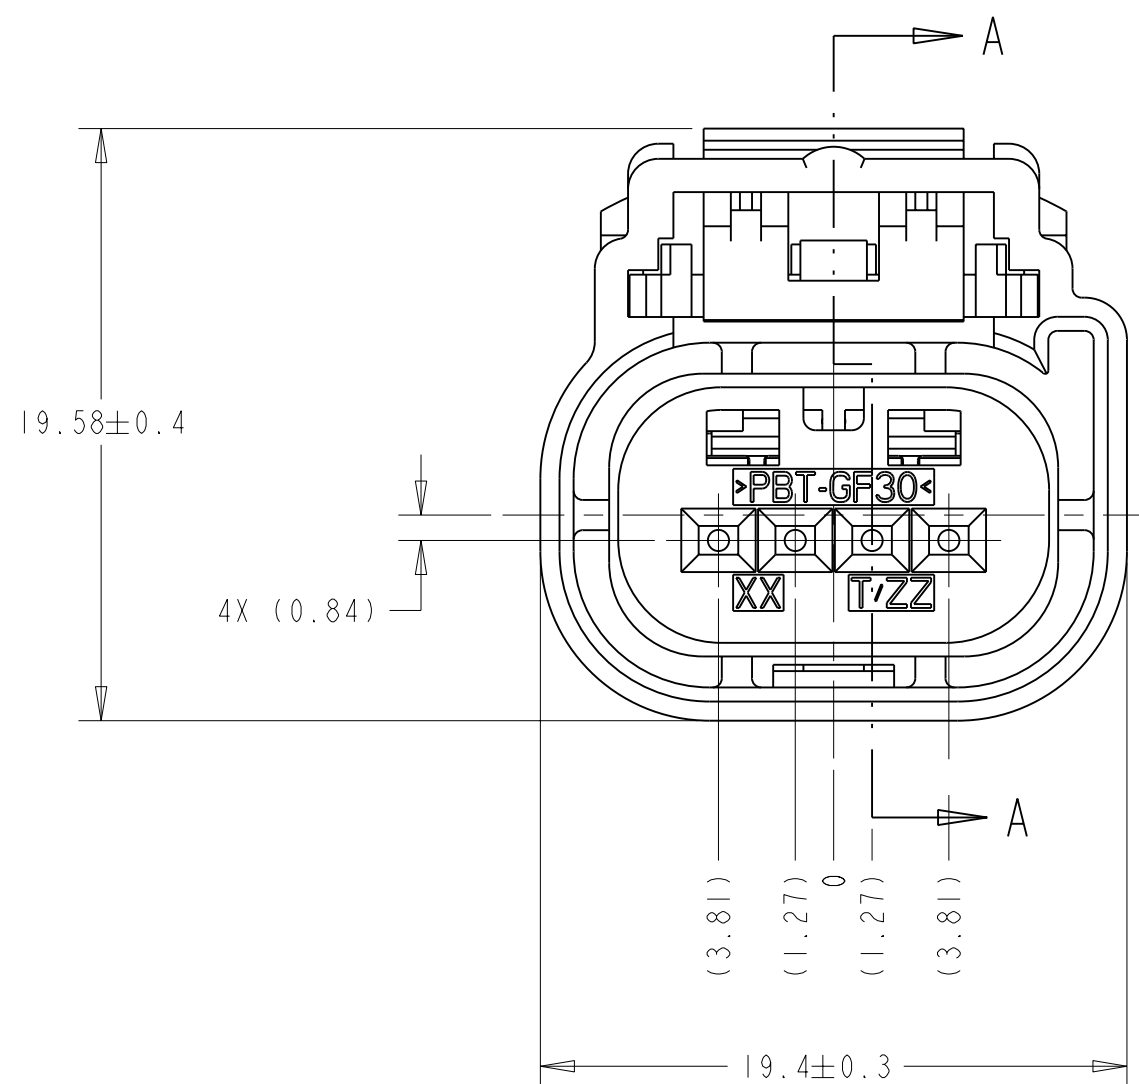




PIN-OUT CHART				
		3	4	1438188-1 1719256-2 9-1419167-9
	2			9-1419167-5 1719256-3
				1719256-1 9-1419167-8 1419168-1 0-1419168-2 9-1419167-0 9-1419167-1 9-1419167-2 9-1419167-3
1	2	3	4	
TERMINAL HOLE POSITION				ASSEMBLY PART NUMBER
CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS				
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS				

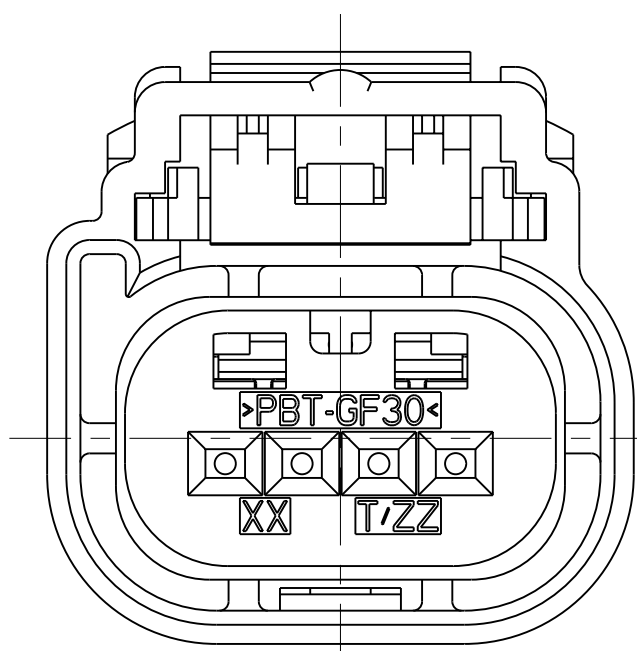

KEYING OPTION "B"

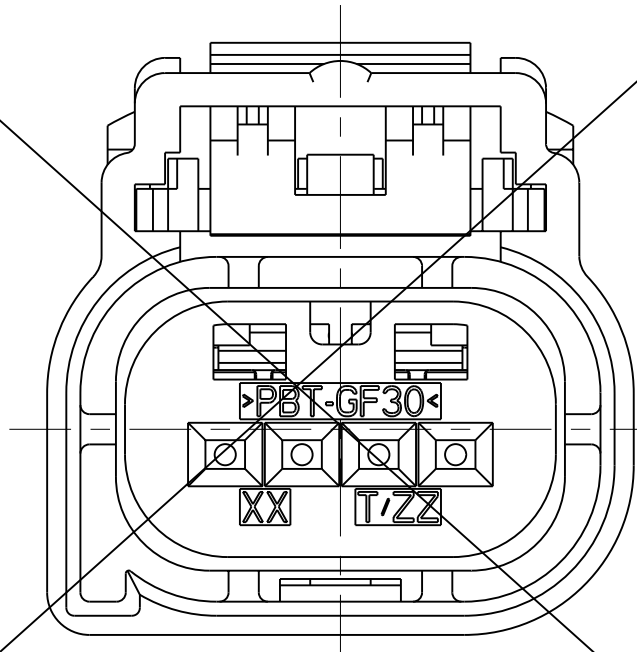


KEYING OPTION "D"

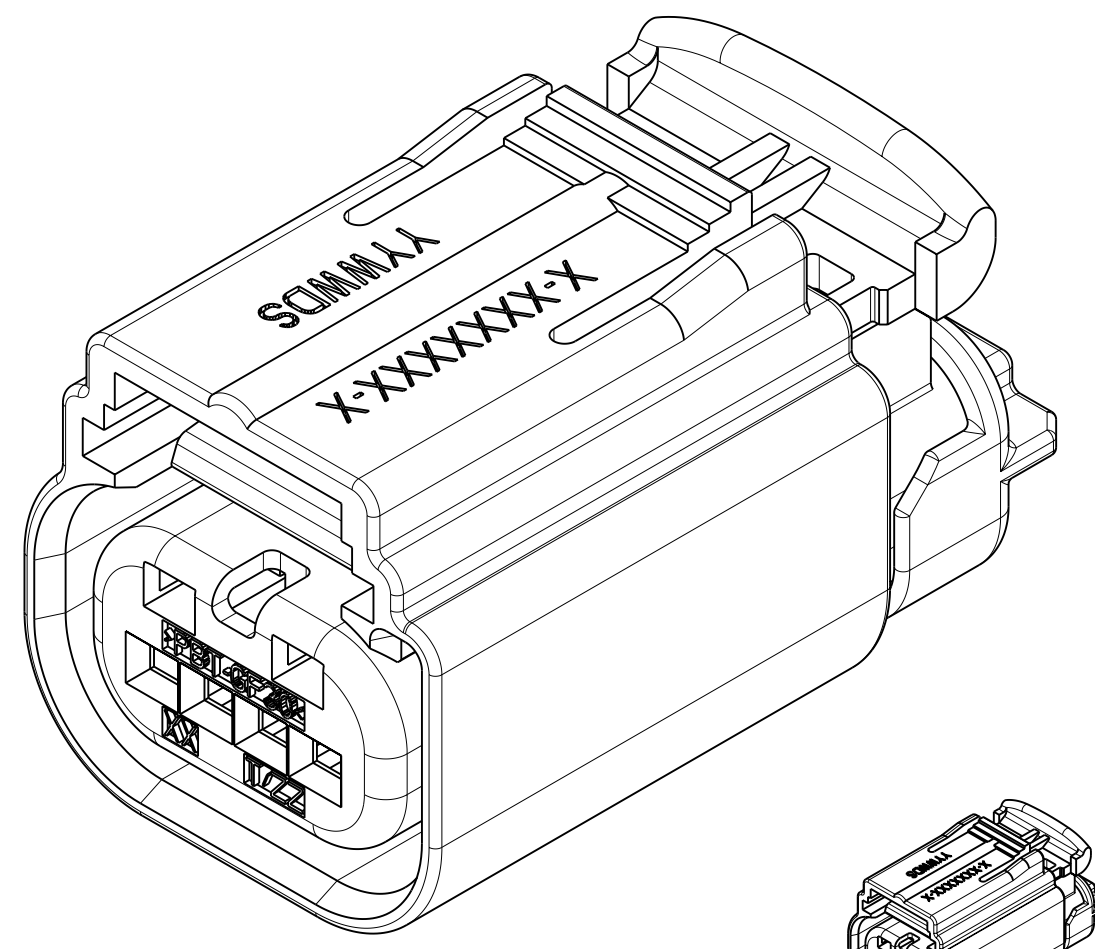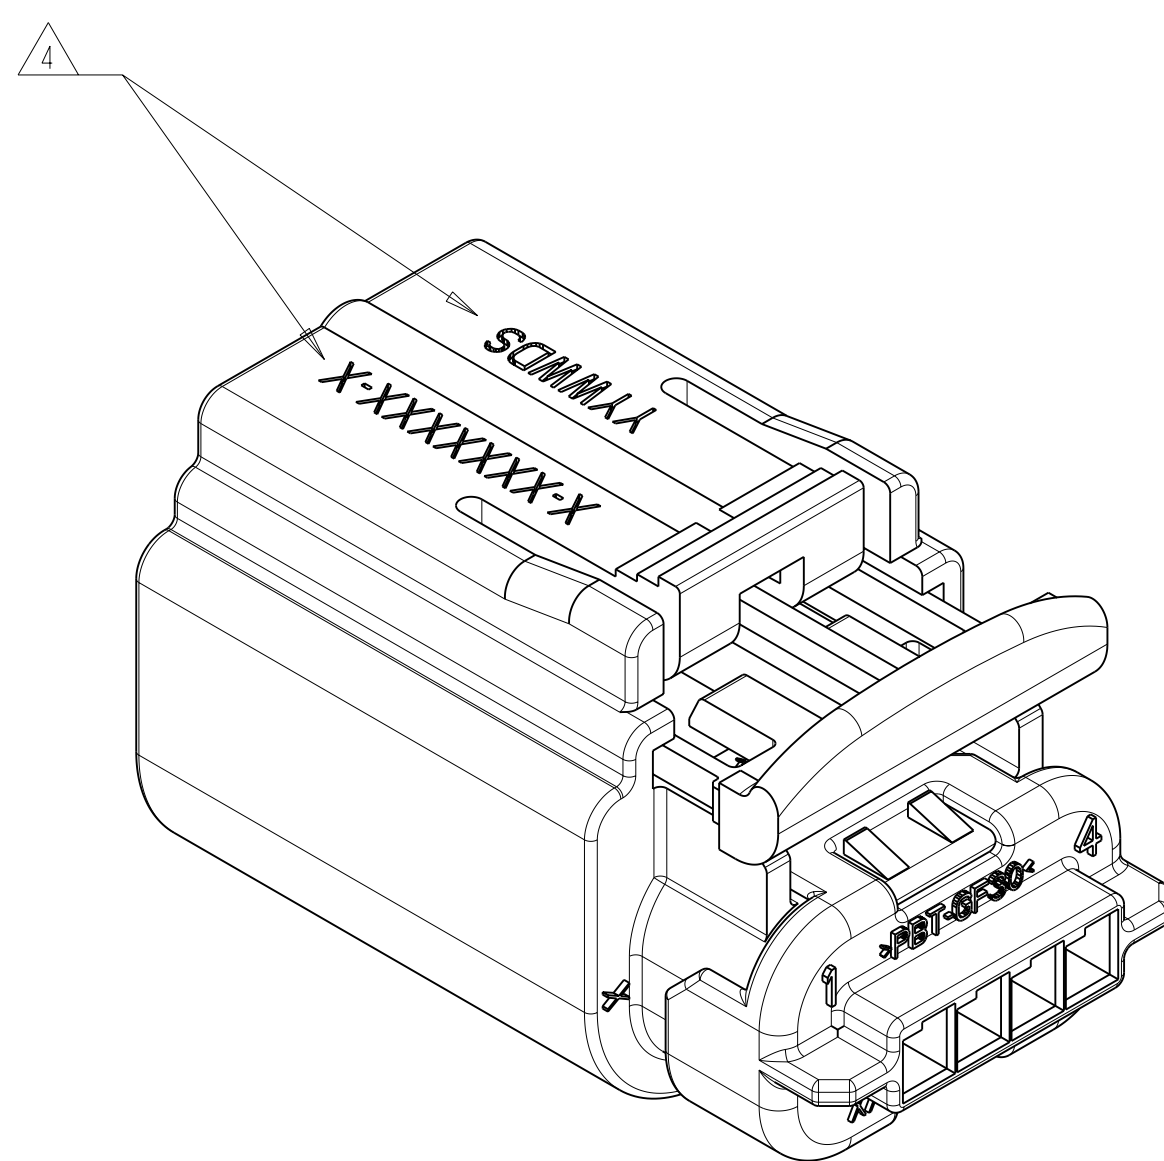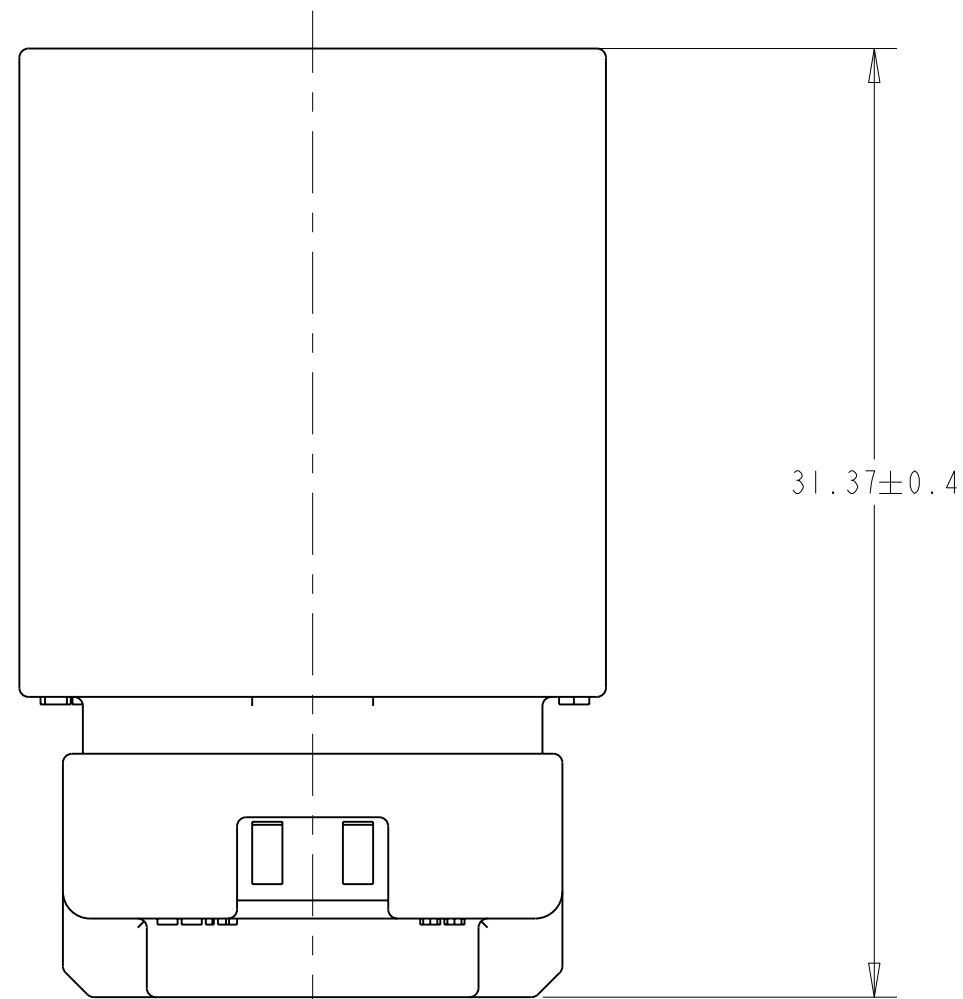


SCALE 1:1

KEYING OPTION "A" SHOWN
SEE NOTE 5 FOR APPLICABLE
HEADER INTERFACE INFORMATION

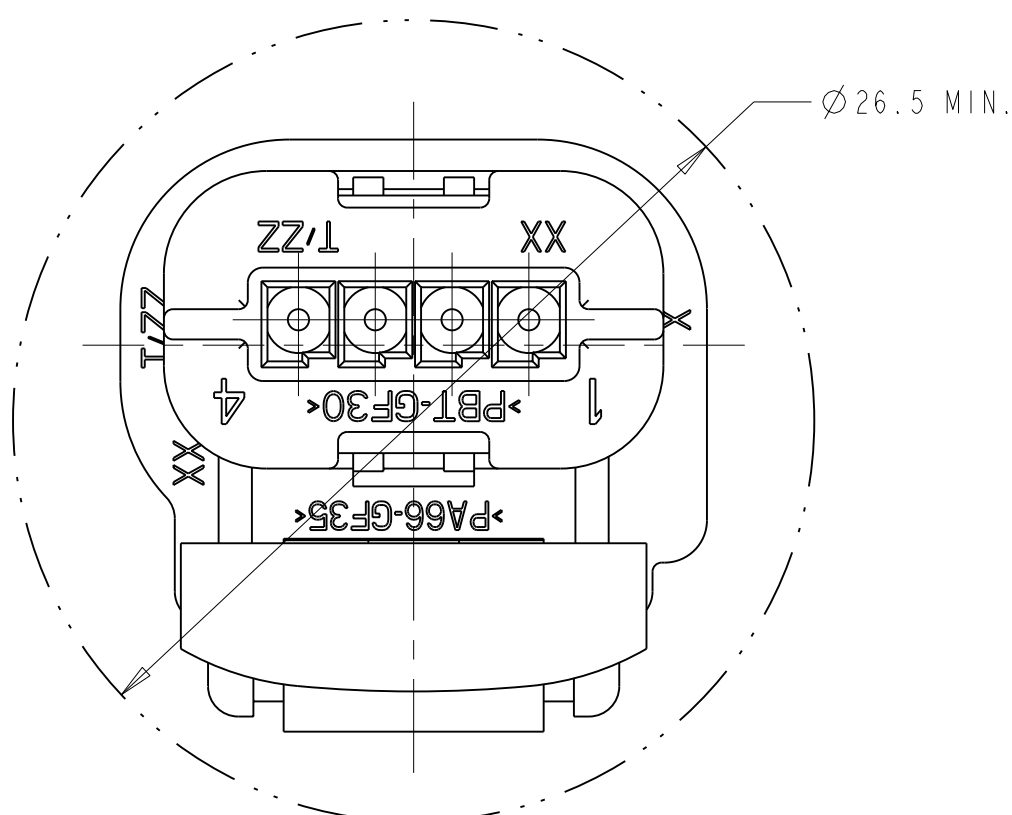

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)
3. TPA AND CPA (OPTIONAL) ARE SHIPPED IN THEIR PRE-LOADED
POSITIONS. ALL ASSEMBLIES ARE TO BE BULK PACKAGED.
4. TE ASSEMBLY PART NUMBER (X-XXXXXX-X) AND TRACEABILITY CODE
(YY = TWO DIGIT YEAR, WW = TWO DIGIT WEEK, D = ONE DIGIT DAY OF THE WEEK,
S = ONE DIGIT SHIFT NUMBER) ARE PRINTED IN THIS LOCATION.
5. APPLICABLE HEADER INTERFACE DRAWING 1438198 IS AVAILABLE UPON REQUEST.
A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE
PRODUCT MANAGER, VIA YOUR TE SALES REPRESENTATIVE
OR CUSTOMER SERVICE.
6. PART ASSEMBLY WEIGHT WITHOUT TERMINALS:
WITHOUT CPA: 5.70 GRAMS
WITH CPA: 6.10 GRAMS
7. THESE PART NUMBERS ARE NOT RELEASED FOR PRODUCTION. PLEASE CONTACT YOUR
TE SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

1719256-3	1719256-2	1719256-1	9-1419167-3	9-1419167-2	9-1419167-1	9-1419167-5	9-1419167-0	9-1419167-2	9-1419167-1	9-1419167-9	1438188-1	9-1419167-8	<--- ASSEMBLY PART NUMBERS							
B	B	C			E	E	E			E	E	E	ASSEMBLY REVISION							
I	I	I						I	I	I	I	I	6	CPA	PBT-GF15	RED				
I	I	I						I	I	I	I	I	5	PERIMETER SEAL	SILICONE	WHITE BLUE				
I	I	I						I	I	I	I	I	4	GROMMET	SILICONE	BROWN				
I	I	I						I	I	I	I	I	3	COVER	PBT-GF30	BLUE (E)				
I	I	I						I	I	I	I	I	2	TPA	PBT-GF30	BLUE (E)				
								I					I	PLUG WITH KEYING OPTION "D"	PA66-GF35	GREY				
								I					I	PLUG WITH KEYING OPTION "C"	PA66-GF35	GREY				
								I					I	PLUG WITH KEYING OPTION "B"	PA66-GF35	GREY				
								I					I	PLUG WITH KEYING OPTION "A"	PA66-GF35	GREY				
QUANTITY													ITEM	DESCRIPTION	MATERIAL	COLOR/FINISH				
THIS DRAWING IS A CONTROLLED DOCUMENT.													DWN M FORISKA 16JAN2002		 TE Connectivity 1 X 4 SEALED FEMALE PLUG ASSEMBLY CUSTOMER SPEC. (EUROPE)					
DIMENSIONS:													CHK M FORISKA 19FEB2002					NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:													APVD A SHUMAN 19FEB2002							
mm													PRODUCT SPEC							
													APPLICATION SPEC							
MATERIAL													WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
FINISH													SEE NOTE 8	A1	00779	9-1419167-0	-			
CUSTOMER DRAWING													SCALE		4:1	SHEET	1	OF	REV	E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1419168-1](#)