
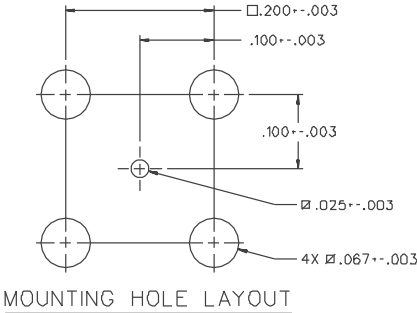
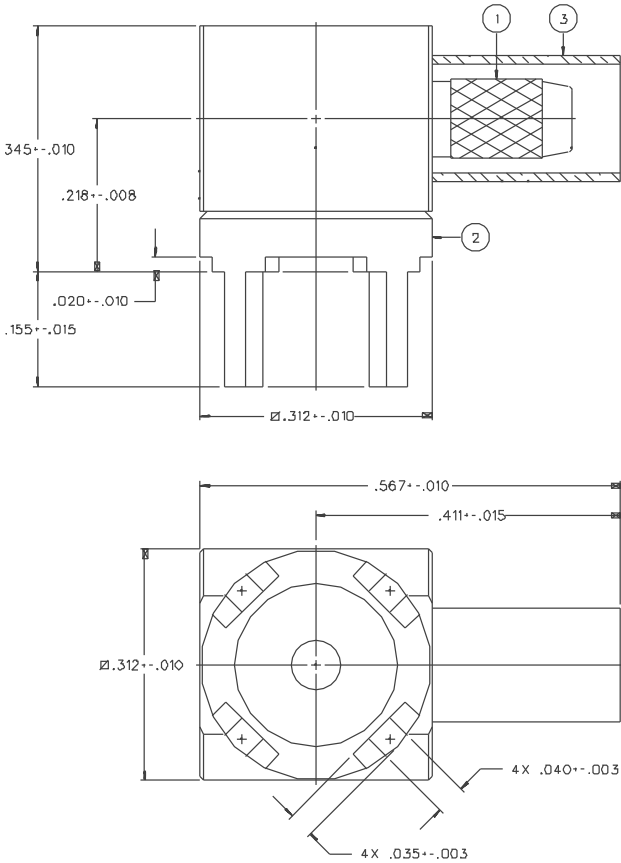


PART NUMBER	ITEM ① BODY	ITEM ② BASE	ITEM ③ CRIMP SLEEVE
T42-D004-3D1	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	COPPER GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN
T42-D004-3D6	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN

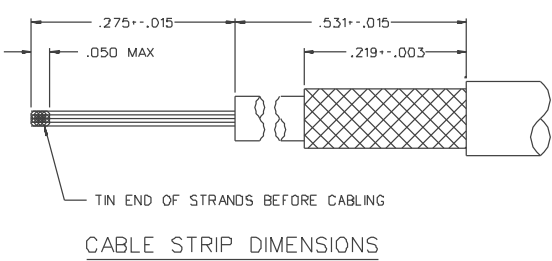

NOTES:

- SPECIFICATIONS:
CABLE ACCEPTABILITY: RG 316/U DOUBLE SHIELDED
RG 188/U DOUBLE SHIELDED
CABLE HEX CRIMP SIZE: .151
CABLE RETENTION: 20 LBS MIN OR CABLE BREAKING STRENGTH

DRAWING NO.									
C - 142-0004-301/310									
0		REVISIONS							
ENGINEERING RELEASE									
1	6-12-92	R H		T A					ECO 41080

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE	Johnson Components 299 Johnson Ave. P.O. Box 1732 Waseca, MN 56093-0832
DECIMALS	mm	VE-T	5-8-92	
.XX		CHECKED BY	DATE	
.XXX		APPROVED BY	DATE	
MATL		VE-T	6-15-92	TITLE CABLE TERMINATION, RA PC MOUNT RG 316 DOUBLE SHIELDED
FINISH		TAK/RJB	DATE	
		RELEASE DATE	6-15-92	CODE NO. C - 142-0004-301/310
		SCALE 10:1	U/M INCH	SHEET 2 OF 2