

Housing - HC-EVO-B16-SHWSC-2SSM25-PLRBK - 1421382

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting bases B16, With single locking latch, Material: Polyamide, Protective cover material: Polyamide, Cable outlets: 2, lateral, Height: 84 mm, Cable gland: none, Gland: no, 2x M25, Protective cover: Yes, Standard

Product Description

One screw connection opening is closed, however it can be opened using a screwdriver. Incl. two plastic reductions M40 to M25

Why buy this product

- Lower costs than metal version
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic
- Marking label can be attached

RoHS

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 264998
GTIN	4055626264998
Custom tariff number	85389099

Technical data

Dimensions

Height	84 mm
Width	57 mm
Length	117 mm

Ambient conditions

Degree of protection of housing (IP)	IP66
--------------------------------------	------

Housing - HC-EVO-B16-SHWSC-2SSM25-PLRBK - 1421382

Technical data

Ambient conditions

Degree of protection of housing (NEMA)	12 (UL 50)
Ambient temperature (operation)	-40 °C ... 125 °C

General


Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, HV6, M, K, HV06-I-PR, HV 6-E...C
Size	B16
Housing type	Box mounting bases
Color	black
Locking type	With single locking latch
No. of cable outlets	2
Cable exit	lateral
Screw connection	none
Type of the screw connection	2x M25
Protective cover	Yes
Housing material	Polyamide
Seal material	NBR
Material lock	Polyamide
Material, protective cover	Polyamide
Flammability rating according to UL 94	V0
Assembly instructions	Two plastic reductions M40 to M25 are provided
Connection	One of the two openings for the screw connections is sealed but can be broken open using a screwdriver.

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Drawings

Dimensional drawing

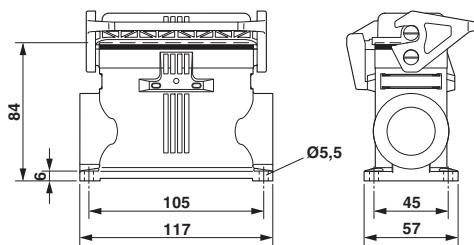

Dimensional drawing

Approvals

Approvals

Housing - HC-EVO-B16-SHWSC-2SSM25-PLRBK - 1421382

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC 7500651.22.01.00246

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1421382](#)