

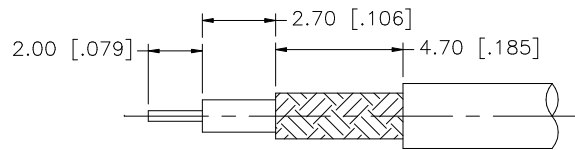
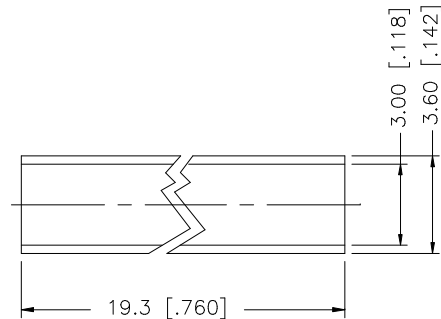



REV.	DATE	DESCRIPTION
NC	08/01/05	INITIAL RELEASE
A	06/01/06	MODIFY STRIPPING DIMENSIONS

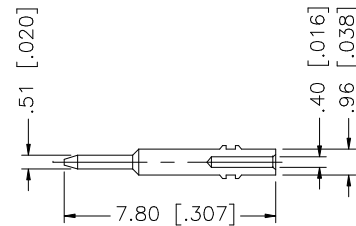

RECOMMENDED
CABLE STRIPPING DIM'S

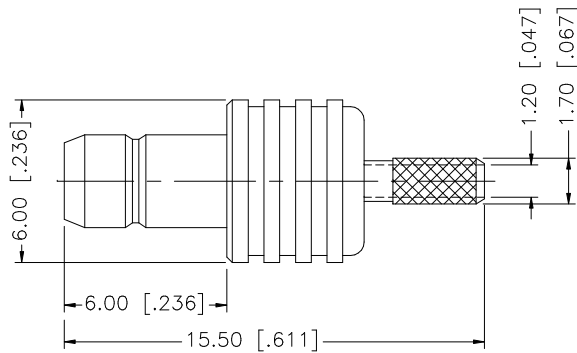

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
8						DRAWN	G.R.S.								06/01/06	
7						CHECKED										
6						ISSUED			PART DESCRIPTION SMB CRIMP JACK (FOR RG-178B/U, 196A/U CABLE)							
5	HEAT SHRINK TUBE			1		SHEET	1 OF 1									
4	FERRULE	COPPER	GOLD	1					PART NO. 142241							
3	CONTACT PIN	BRASS	GOLD	1												
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 142241.DWG REV. A SIZE A SCALE NA							
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/142/142241.DWG								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[142241](#)