

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

46114-2281

Status:


Active

Overview:

EXTreme LPHPower™

Description:

1.27mm, 12.00mm Pitch, EXTreme LPHPower™ Receptacle Header, Vertical, 2 Power Contacts, 28 Signal Contacts, Select Gold (Au) Plating, without BMI Guides

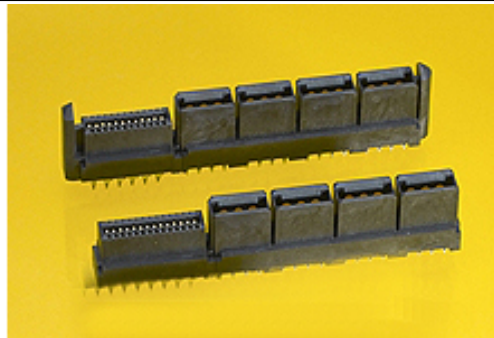

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-46114-001 \(PDF\)](#)
- [Application Specification AS-46114-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19880

UL

E29179

General

Product Family

PCB Receptacles

Series

46114

Application

Board-to-Board, Power

Application Tooling Part Link

621006300

Application Tooling Part Link

622018671

Comments

Press Fit Pin

Overview

EXTreme LPHPower™

Product Name

EXTreme LPHPower™

UPC

756054923078

Physical

(p)ower-(s)ignal Configuration

2p - 28s

Circuits (Loaded)

30

Circuits (maximum)

30

Color - Resin

Black

Durability (mating cycles max)

250

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

5.172/g

Number of Rows

2

Orientation

Vertical

PC Tail Length

2.52mm, 2.58mm

PCB Locator

No

PCB Retention

None

Packaging Type

Tray

Pitch - Mating Interface

1.27mm, 12.00mm

Pitch - Termination Interface

1.27mm, 2.50mm

Plating min - Mating

0.762µm

Plating min - Termination

2.540µm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)

Yes

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Low-Halogen Status

Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
46114Series

Mates With
45985 EXTreme LPHPower™ Header

Application Tooling | [FAQ](#)
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
LPH Vertical Receptacle Power Terminal Removal Tool	0621006300
Vertical Receptacle Press-In Tool	0622018671

Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	30A
Grounding to PCB	No
Voltage - Maximum	250V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-46114-001
Product Specification	PS-46114-001
Sales Drawing	SD-46114-200

This document was generated on 02/22/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION