

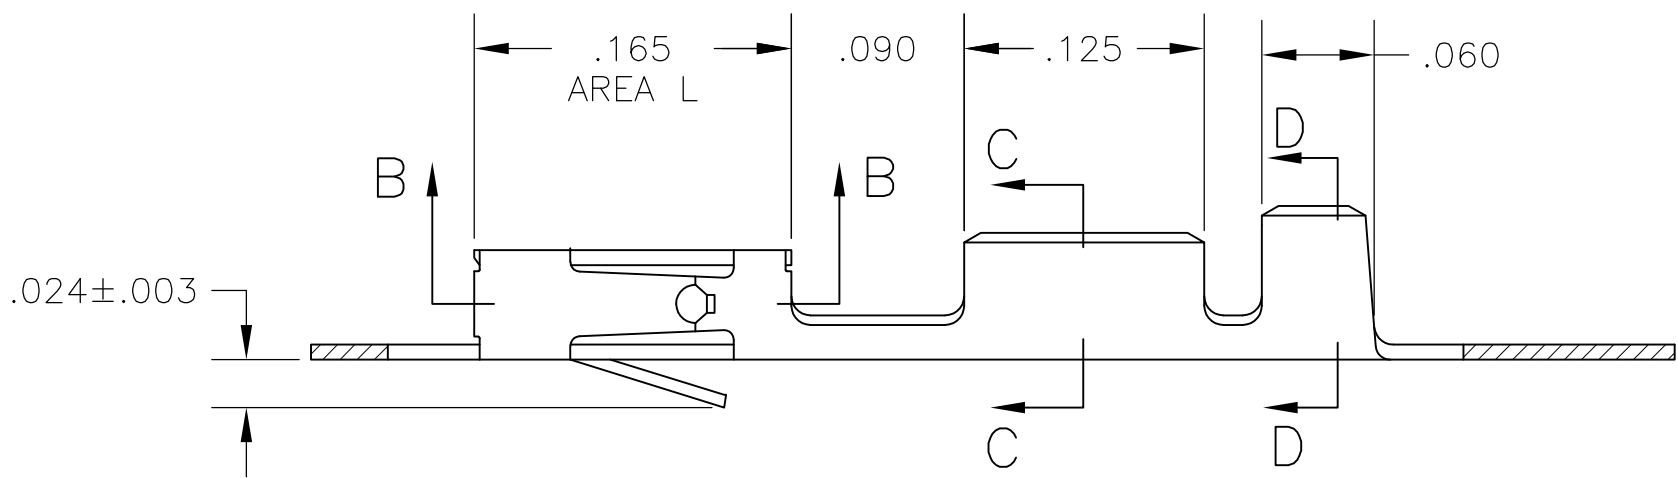
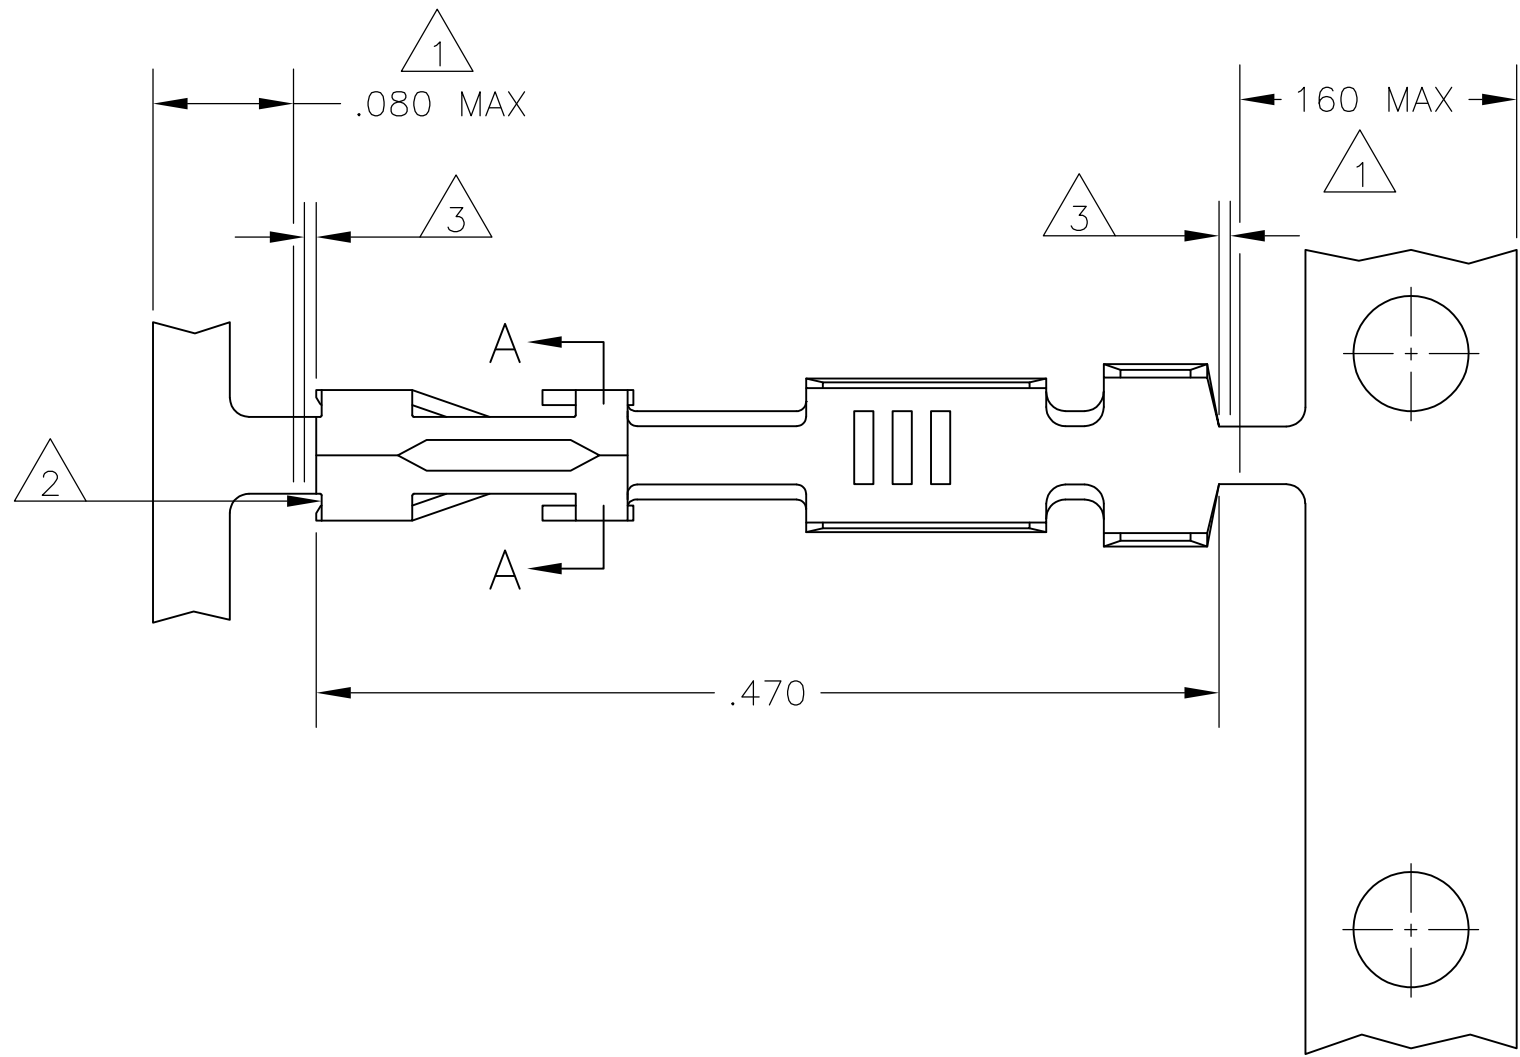



SECTION A-A



SECTION B-B

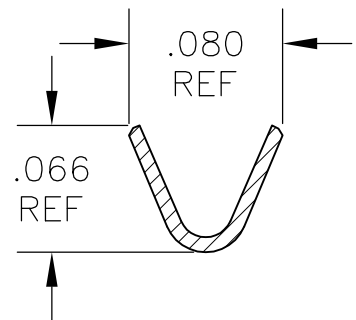

WIRE RANGE #20-#24
SECTION C-C

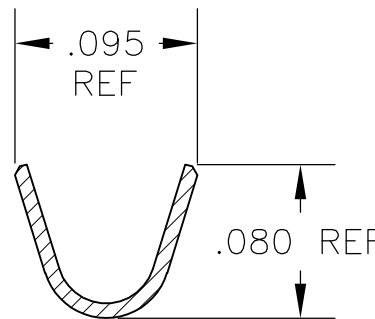

INSULATION RANGE .069 MAX
SECTION D-D

- 1 PLATING IS NOT REQUIRED IN THIS AREA.
- 2 CUT-OUTS ON BOX AT MANUFACTURER'S OPTION.
- 3 .006 MAX LOOSE PIECE CUT-OFF.
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS(INSIDE BEAMS).
- 5 .000015 GOLD IN CONTACT AREA, GOLD FLASH ON REMAINDER OF TERMINAL, ALL OVER .000050 NICKEL.
- 6 .000030 GOLD OVER .000050 NICKEL.
- 7 .000030 GOLD IN CONTACT AREA, GOLD FLASH ON REMAINDER OF TERMINAL, ALL OVER .000050 NICKEL.
- 8 PREPLATED: .000078-.000158 BRIGHT TIN.
- 9 .000030 GOLD IN CONTACT AREA, GOLD FLASH IN AREA L, ALL OVER .000050 NICKEL.
- 10 .000050 GOLD IN CONTACT AREA, GOLD FLASH ON REMAINDER OF TERMINAL, ALL OVER .000050 NICKEL.
- 11 SHEARED EDGES PERMITTED TO BE UNPLATED.
- 12 OBSOLETE PART NUMBER.
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

OBSOLETE	12-6	1-	12-7	10	1-86492-8
	12-5	1-	12-4	9	1-3
	87046-4	12-8	8		-9
	-3	12-5	7		-6
	-2	12-3	6		-4
	87046-1	12-1	5		86492-2
	LOOSE PIECE PART NUMBER	STANDARD APPLICATOR PART NUMBER	FINISH	MINI APPLICATOR PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L A MAYER	20MAY85	TE Connectivity	
		CHK R J DAVIS	07JUN85		
		APVD C LINDGREN	14JUN85		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	PRODUCT SPEC	
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± .005		
		4 PLC	± -		
		ANGLES	± -		
MATERIAL		FINISH	-	APPLICATION SPEC	
CU-NI-SI				SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A100779C=86492	
				CUSTOMER DRAWING	
				SCALE 10:1	
				SHEET 1 OF 1	
				REV L	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-86492-8](#)