


## Base strip - MCV 0,5/ 5-G-2,5 - 1881587

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Header, Nominal current: 4 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 2.5 mm, Color: green, Contact surface: Tin, Mounting: Wave soldering

The figure shows a 10-position version of the product

### Product Features

- Low-profile pin strips with a compact MICRO pitch of 2.5 mm
- Plug-in direction parallel and vertical to the PCB
- Individual position coding by inserting coding profiles

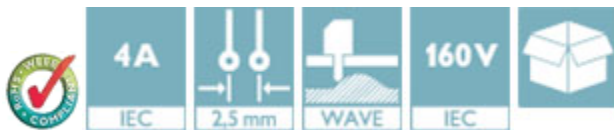

### Key Commercial Data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Minimum order quantity               | 50 pc    |
| Weight per Piece (excluding packing) | 1.36 g   |
| Custom tariff number                 | 85366990 |
| Country of origin                    | Germany  |

### Technical data

#### Dimensions

|                          |              |
|--------------------------|--------------|
| Length                   | 8.1 mm       |
| Pitch                    | 2.50 mm      |
| Dimension a              | 10 mm        |
| Width                    | 14.4 mm      |
| Constructional height    | 10.1 mm      |
| Height                   | 13.6 mm      |
| Length of the solder pin | 3.5 mm       |
| Pin dimensions           | 0,8 x 0,8 mm |

## Base strip - MCV 0,5/ 5-G-2,5 - 1881587

### Technical data

#### Dimensions

|               |        |
|---------------|--------|
| Hole diameter | 1.2 mm |
|---------------|--------|

#### General

|                                        |               |
|----------------------------------------|---------------|
| Range of articles                      | MCV 0,5/...-G |
| Insulating material group              | I             |
| Rated surge voltage (III/3)            | 1.5 kV        |
| Rated surge voltage (III/2)            | 2.5 kV        |
| Rated surge voltage (II/2)             | 2.5 kV        |
| Rated voltage (III/3)                  | 80 V          |
| Rated voltage (III/2)                  | 160 V         |
| Rated voltage (II/2)                   | 320 V         |
| Connection in acc. with standard       | EN-VDE        |
| Nominal current $I_N$                  | 4 A           |
| Maximum load current                   | 4 A           |
| Insulating material                    | PA            |
| Flammability rating according to UL 94 | V0            |
| Color                                  | green         |
| Number of positions                    | 5             |

#### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CUL    |
| Flammability rating according to UL 94 | V0     |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |
| eCl@ss 9.0 | 27440402 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
|----------|----------|

## Base strip - MCV 0,5/ 5-G-2,5 - 1881587

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / IECCE CB Scheme / CCA / EAC / EAC / cULus Recognized

#### Ex Approvals

#### Approvals submitted

### Approval details

|                                                                                                   |       |
|---------------------------------------------------------------------------------------------------|-------|
| UL Recognized  |       |
|                                                                                                   | B     |
| Nominal current I <sub>N</sub>                                                                    | 4 A   |
| Nominal voltage U <sub>N</sub>                                                                    | 125 V |

|                                                                                                                             |      |
|-----------------------------------------------------------------------------------------------------------------------------|------|
| VDE Gutachten mit Fertigungsüberwachung  |      |
|                                                                                                                             |      |
| Nominal current I <sub>N</sub>                                                                                              | 4 A  |
| Nominal voltage U <sub>N</sub>                                                                                              | 80 V |

## Base strip - MCV 0,5/ 5-G-2,5 - 1881587

### Approvals

|                                                                                                  |       |
|--------------------------------------------------------------------------------------------------|-------|
| cUL Recognized  |       |
|                                                                                                  | B     |
| Nominal current I <sub>N</sub>                                                                   | 4 A   |
| Nominal voltage U <sub>N</sub>                                                                   | 125 V |

|                                                                                                   |      |
|---------------------------------------------------------------------------------------------------|------|
| IECEE CB Scheme  |      |
|                                                                                                   |      |
| Nominal current I <sub>N</sub>                                                                    | 4 A  |
| Nominal voltage U <sub>N</sub>                                                                    | 80 V |

|                                |      |
|--------------------------------|------|
| CCA                            |      |
|                                |      |
| Nominal current I <sub>N</sub> | 4 A  |
| Nominal voltage U <sub>N</sub> | 80 V |

|     |
|-----|
| EAC |
|-----|

|     |
|-----|
| EAC |
|-----|

|                                                                                                      |
|------------------------------------------------------------------------------------------------------|
| cULus Recognized  |
|------------------------------------------------------------------------------------------------------|

### Accessories

#### Accessories

#### Coding element

Coding profile - CP-MC 0,5 - 1881435

Coding profile, is inserted into the groove in the header, red insulating material



## Base strip - MCV 0,5/ 5-G-2,5 - 1881587

### Accessories

Labeled terminal marker

Marker card - SK 2,54/2,8:FORTL.ZAHLEN - 0804853



Marker card, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, for terminal block width: 2.54 mm, Lettering field: 2.54 x 2.8 mm

### Additional products


Printed-circuit board connector - FK-MC 0,5/ 5-ST-2,5 - 1881354




Plug component, Nominal current: 4 A, Rated voltage (III/2): 160 V, Number of positions: 5, Pitch: 2.5 mm, Connection method: Push-in spring connection, Color: green, Contact surface: Tin

### Drawings

Drilling diagram




Diagram

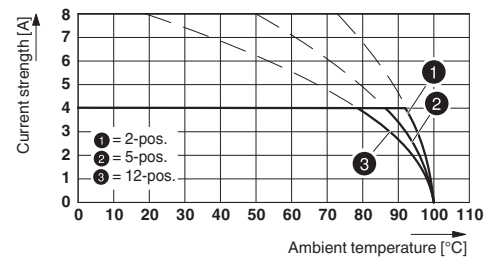

Type: FK-MC 0,5/...-ST-2,5 with MCV 0,5/...-G-2,5

## Base strip - MCV 0,5/ 5-G-2,5 - 1881587


Dimensional drawing

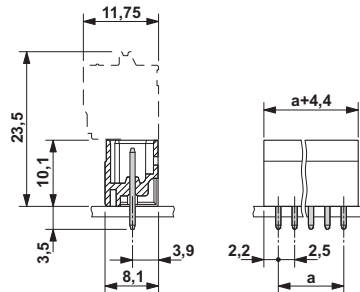

Diagram

Plug:

ZEC 1,5/6-ST-7,5 C2 R 1,6

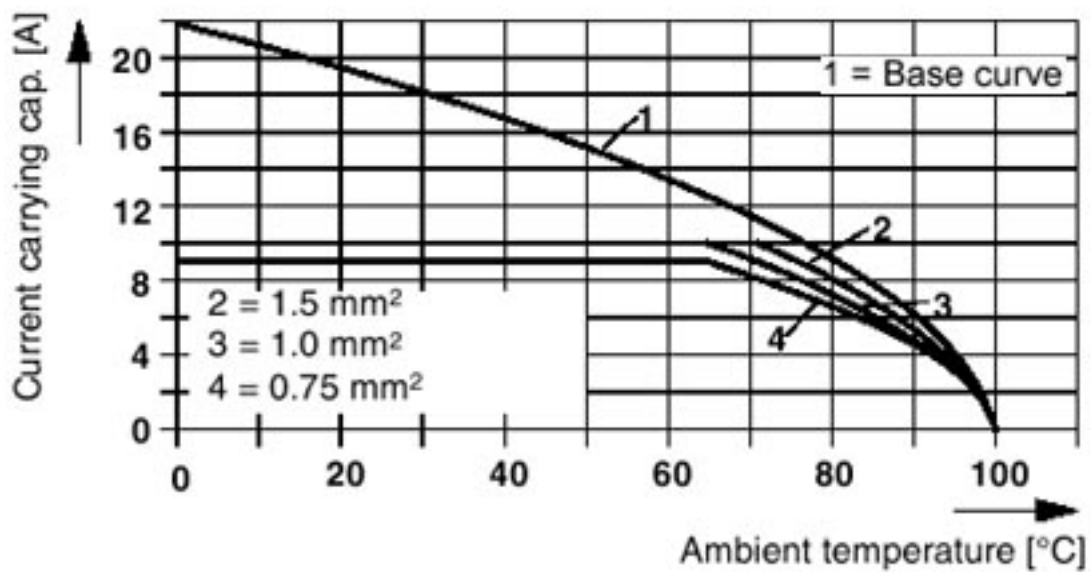

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact:

1881587