




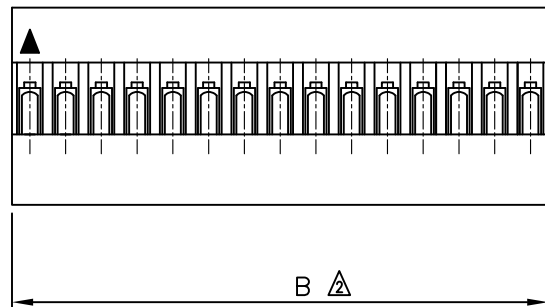

C^{UL} US E182481

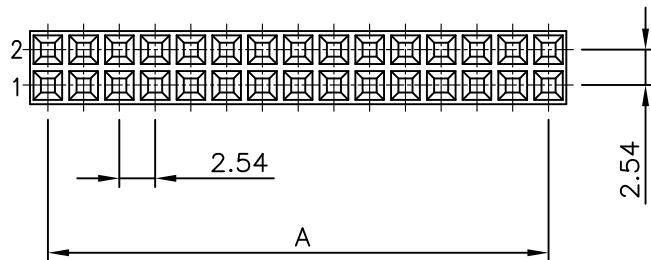

Circuits	Dimension mm	
04~40	A±0.25	B±0.38
42~50	A±0.30	B±0.50
52~80	A±0.50	B±0.50
A: 2.54 X (PART NO. OF PIN/2-1)		
B: 2.54 + A		

NOTES

- * Available in 2X2 through 2X14 Circuits
Material: P.B.T+15%GF UL94-V0
Nylon 66 UL94-V0
Packing: PE BAG
- * Available in 2X15 through 2X40 Circuits
Material: Nylon 66 UL94-V0
Packing: BOX
- * YY-1900-H04~YY-1900-H19 Accepts
YY-1800-T Crimp Terminal or
YY-1900-H20~YY-1900-H80 Accepts
YY-1900-T Crimp Terminal
- * Mates with YY-1900-WS or
YY-1900-WR Series Header
- * Color : Black

ORDERING INFORMATION

YY-1900 - $\frac{H}{1} \frac{**}{2} \frac{*}{3} - \frac{*}{4}$

- H : Housing
- No. of Circuits 04~80
- Material / Packing : ☐ -PBT / PE BAG
N -Nylon 66 / PE BAG (04~28PIN)
N -Nylon 66 / BOX (30~80PIN)
- Stopper Pin No : ☐ : Non Stopper
F**P: Tuck ** Pin

GOLDSUN ELECTRONICS CO., LTD.

JAMECO NO. 103230	GOLDSUN NO. YY-1900-H20-ROHS		
Description 0.1" CONNETOR HOUSING DOUBLE ROW, 20PIN(2x10)			Rev. 1
UNIT: mm	SCALE:	SHEET 1 OF 1	CAS No: ERN No: