


FINISHED WIRE DATA		
CONDUCTORS	WIRE AWG	24 AWG SOLID
	MATERIAL	SOLID BARE COPPER
INSULATION	MATERIAL	FEP/POLYOLEFIN
JACKET	MATERIAL	FR PVC

COLOR CODE

PAIR COLOR CODE

- 1 WHT/BLU
- 2 WHT/ORG
- 3 WHT/GRN
- 4 WHT/BRN

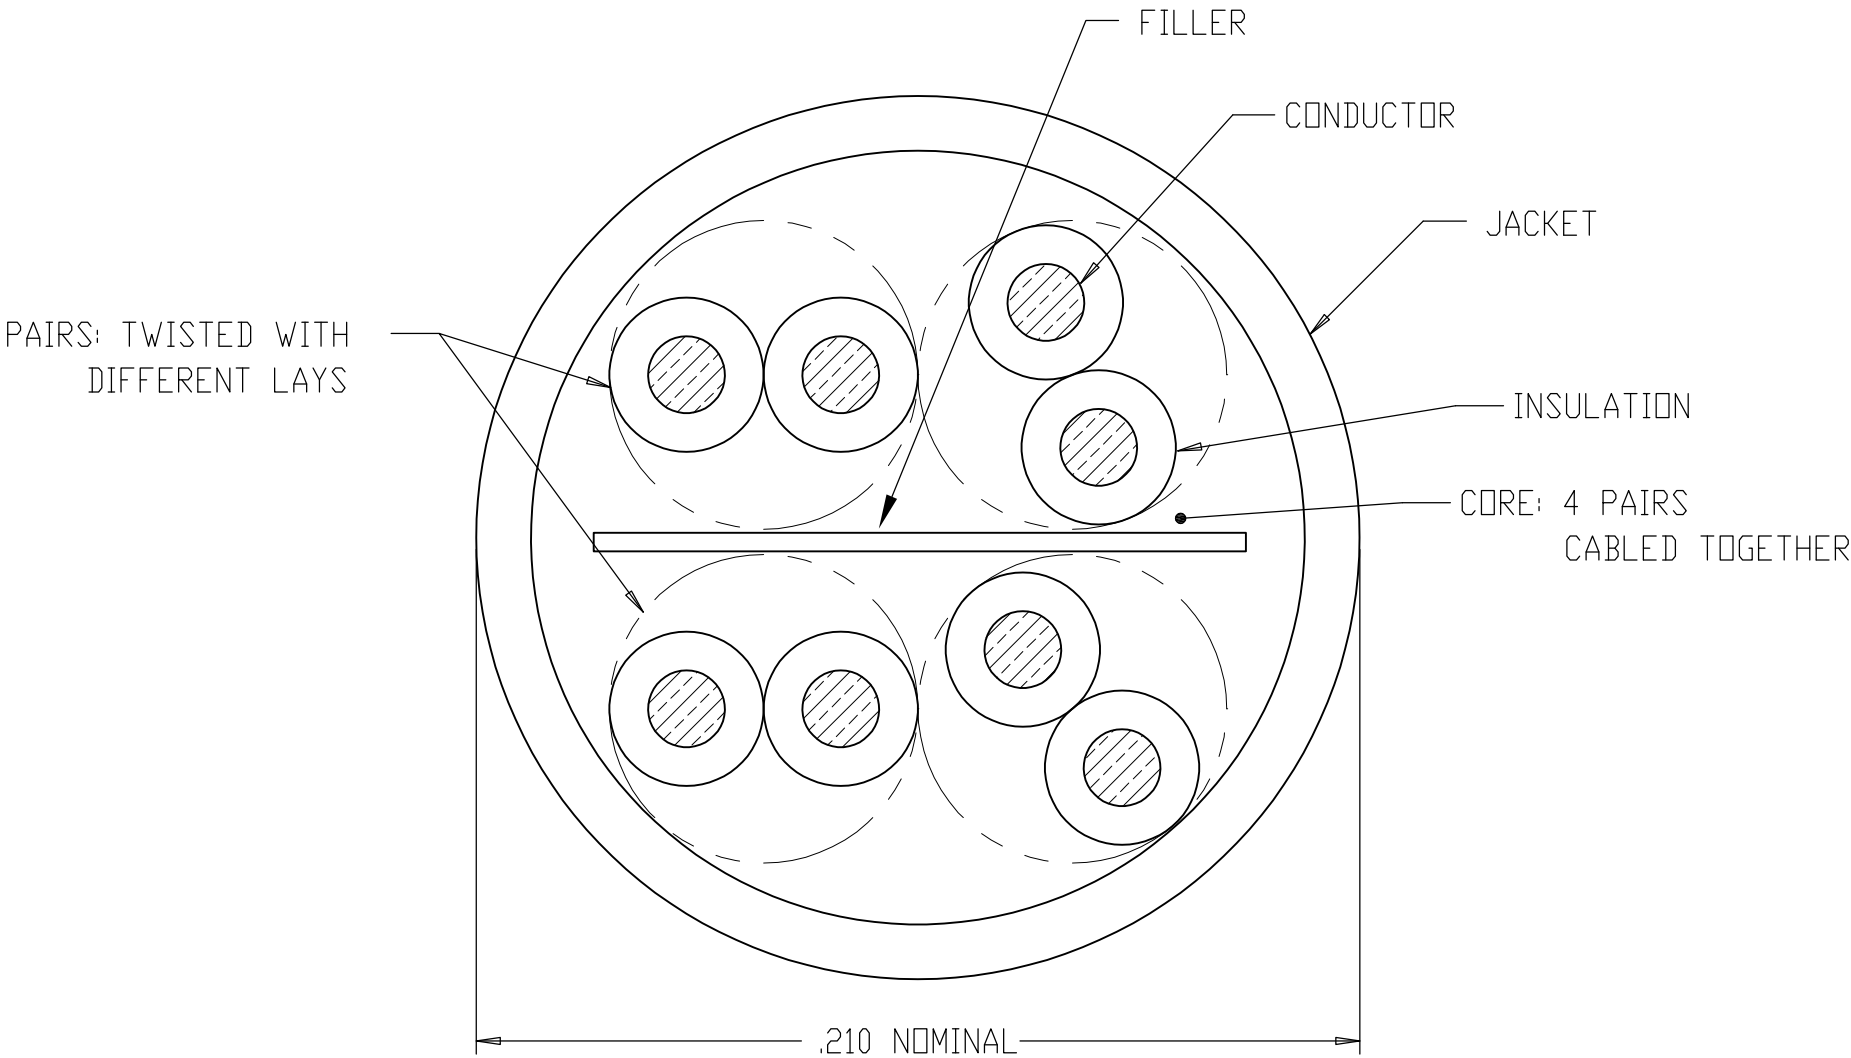

LEGEND TO BE REPEATED EVERY 24"




TE CONNECTIVITY 610 SERIES 4/24 AWG T256 CMP C(UL)US ETL VERIFIED TIA-568-C.2 CAT 6 XXXX FT

LOC	DIST	REVISIONS					
HM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			L	REV ECO-12-013616	30JUL2012	GG	LH

- 1 SEQUENTIAL FOOTAGE RETURNED TO ZERO FOR EACH LENGTH. ON PUTUP LENGTHS 3000 FT OR LESS.
- 2 MATERIALS ARE SELECTED BASED ON THEIR ABILITY TO CONFORM TO UL 444 LATEST ISSUES.
3. INSULATION COLORS SHALL BE BLUE, ORANGE, GREEN, BROWN AND WHITE. THE INSULATION COLOR MAY BE TRANSLUCENT.
- 4 XX = JACKET COLOR - BL = BLUE, WT = WHITE, GY = GRAY, GN = GREEN, YL = YELLOW, OR = ORANGE, RD = RED, VT = VIOLET, BK = BLACK.
- 5 PRINT COLOR SHALL BE BLACK OR DARK BLUE, EXCEPT. WHITE ON BLACK JACKET.
- 6 DATE CODE.
7. GOVERNING SPECIFICATIONS - LATEST REVISIONS  
NEC 800  
UL444 CMP  
TIA 568-C.2 CAT 6
- 8 REPLACE "02" FOR THE FOLLOWING FOOTAGES:  
04=2000', 05=2500', CALL FOR ADDITIONAL OPTIONS.

CATALOG NUMBER	WEIGHT		PACKAGING
	LBS/KFT	KG/KM	
TE610P-XX02	29	43	1,000' REEL
TE610P-XXII	29	43	1,000' REELEX BOX

48

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L. HALL 05DEC2007		<div>TE Connectivity</div>												
			CHK J. GENIAC 11DEC2007														
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. GENIAC 11DEC2007		NAME											
		0 PLC ± -		PRODUCT SPEC		CABLE, SERIES 610, 4UTP, 24 AWG, CMP  -  -											
		1 PLC ± -		-													
		2 PLC ± .02		APPLICATION SPEC													
		3 PLC ± .005		-													
		4 PLC ± -		-													
ANGLES ± -				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO							
MATERIAL - 		FINISH -		WEIGHT -		A2		00779		C=1933047		-					
CUSTOMER DRAWING						SCALE		NTS		SHEET		1 of 1		REV		L	