



Flachdichtung

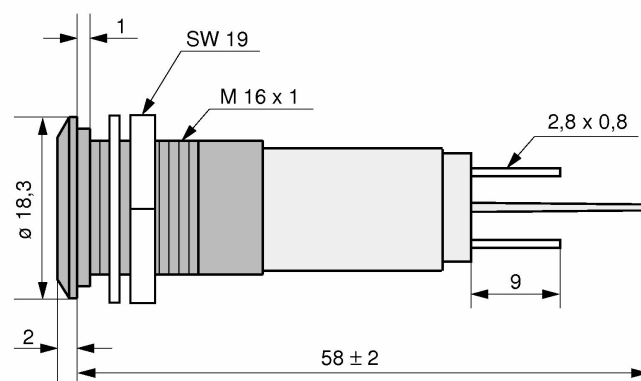

Flachdichtung

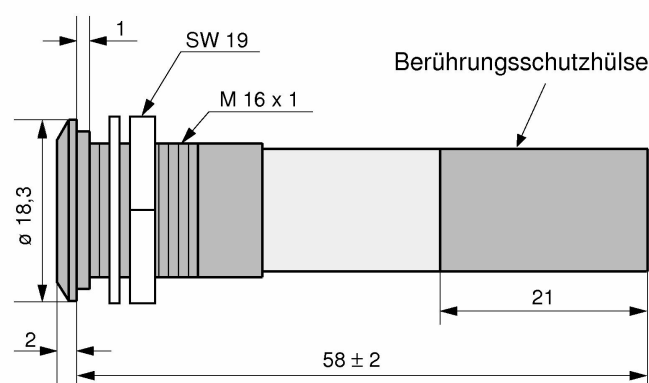

Mounting hole (inch)	10.2362"
Mounting hole (metric)	16mm
Indicator type	standard
Mounting type	with bezel
Bezel type	prominent
Bezel material	metal
Bezel color	matt chrome
Bezel size	M16
Protection	IP67
Lens type	flat
Lens color	white diffused
Lens size	10mm
Connector Tpe	tab terminals 2.8x0.8

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1941	Print date : 13/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :



Part Number : 1941213WM
 Serial Number : 1941
 LEDs Indicators

Connector number	2
Connector for lamp test	no
Number LED chip	1
Indicator color	white
Dom wave length	0.31 / 0.32
Peak Wave Lenght (mA)	
Op. voltage (V)	130V AC
Forward volt max.	
Rectifier	Half Wave
AC current	6mA
DC current	-
Lum in min (mcd)	
Lum in type (DC)	270mcd
Voltage tolerance (%)	10%
Op. temperature (°C)	-25°C...+60°C
Storage temperature (°C)	-25°C...+60°C
Narrative	with protection tube
Viewing angle (°)	
ROHS Status	Yes

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1941	Print date : 13/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :