


Base strip - PC 6-16/ 5-GF-10,16 GY NZ02439 - 1992214

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 41 A, Number of positions: 5, Pitch: 10.16 mm, Color: gray, Contact surface: Silver, Mounting: Wave soldering

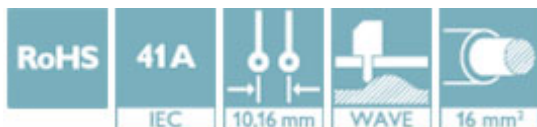

Key Commercial Data

Packing unit	50 STK
GTIN	 4 017918 979089
GTIN	4017918979089
Custom tariff number	85366990
Note	Made to Order (non-returnable)

Technical data

Dimensions

Pitch	10.16 mm
Dimension a	40.64 mm
Constructional height	14 mm
Length of the solder pin	4 mm

General

Range of articles	PC 6-16/...-GF
Nominal current I_N	41 A
Color	gray
Number of positions	5

Standards and Regulations

Connection in acc. with standard	CUL
----------------------------------	-----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Base strip - PC 6-16/ 5-GF-10,16 GY NZ02439 - 1992214

Approvals

Approvals

UL Recognized / SEV / cUL Recognized / IEC EE CB Scheme / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 60425

SEV <https://www.electrosuisse.ch/en/meta/shop/product-certificates.html> IK-3431

cUL Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 60425

IECEE CB Scheme  <http://www.iecee.org/> CH-8077

Nominal current I _N	76 A
Nominal voltage U _N	1000 V

EAC B.01742

cULus Recognized  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1992214](#)