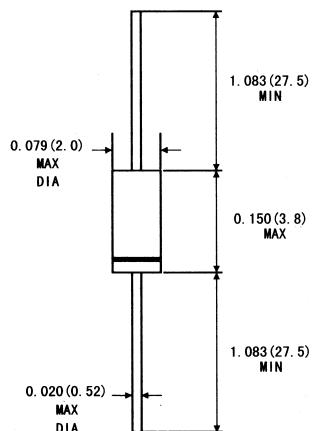


**FEATURES**

- Standards zener voltage tolerance is  $\pm 20\%$ . Add suffix "A" for  $\pm 10\%$  tolerance and suffix "B" for  $\pm 5\%$  tolerance other tolerance, non standards and higher zener voltage upon request.

**DO-35**

Dimensions in inches and (millimeters)

**MECHANICAL DATA**

- Case:** DO-35 glass case
- Polarity:** Color band denotes cathode end
- Weight:** Approx. 0.13gram

**ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES)(TA=25°C )**

	<b>Symbols</b>		<b>Value</b>	<b>Units</b>
Zener current see table "Characteristics"				
Power dissipation at TA=75°C	P <sub>tot</sub>	5001)	mW	
Junction temperature	T <sub>J</sub>	175	°C	
Storage temperature range	T <sub>STG</sub>	-65 to + 175	°C	

1)Valid provided that at a distance of 8mm from case are kept at ambient temperature

**ELECTRICAL CHARACTERISTICS(TA=25°C )**

	<b>Symbols</b>	<b>Min.</b>	<b>Typ.</b>	<b>Max.</b>	<b>Units</b>
Thermal resistance junction to ambient	R <sub>THA</sub>			0.31)	K/mW
Forward voltage at If=200mA	V <sub>F</sub>			1.1	V

1)Valid provided that leads at a distance of 8mm from case are kept at ambient temperature

## 1N5221..1N5249 SILICON PLANAR ZENER DIODES

Type	Zener Voltage Range1)		Maximum zener impedance 1)			Maximum Reverse Leakage Current		Temp.Coefficient of zener diode
	VZNOM 3)	I <sub>ZT</sub>	r <sub>zjt</sub> and r <sub>zjk</sub> at I <sub>zk</sub>			I <sub>R</sub> 2) at V <sub>R</sub>		Tkvz
	V	mA	Ω	Ω	mA	μA	V	%/K
1N5221	2.4	20	<30	<1200	0.25	<100	1.0	<-0.085
1N5222	2.5			<1250		<100		<-0.085
1N5223	2.6			<1300		<75		<-0.080
1N5224	2.8			<1400		<75		<-0.080
1N5225	3.0			<1600		<50		<-0.075
1N5226	3.3		<28	<1600		<25	5	<-0.070
1N5227	3.6			<1700		<15		<-0.065
1N5228	3.9			<1900		<10		<-0.060
1N5229	4.3			<2000				<+0.055
1N5230	4.7			<1900				2.0 <+0.030
1N5231	5.1		<17	<1600				2.0 <+0.030
1N5232	5.6			<1600				3.0 <+0.038
1N5233	6.0			<1600				3.5 <+0.038
1N5234	6.2			<1000				4.0 <+0.045
1N5235	6.8			<750			3	5.0 <+0.050
1N5236	7.5		<6	<500				6.0 <+0.058
1N5237	8.2			<500				6.5 <+0.062
1N5238	8.7			<8				6.5 <+0.065
1N5239	9.1			<10				7.0 <+0.068
1N5240	10			<17				8.0 <+0.075
1N5241	11		<22	<22	0.1	<2		8.4 <+0.076
1N5242	12			<30		<1		9.1 <+0.077
1N5243	13			9.5 <13		<0.5		9.9 <+0.079
1N5244	14			9.0 <15				10 <+0.082
1N5245	15			8.5 <16				11 <+0.082
1N5246	16			7.8 <17				12 <+0.083
1N5247	17			7.4 <19				13 <+0.084
1N5248	18			7.0 <21				14 <+0.085
1N5249	19			6.6 <23				14 <+0.086

**1N5250..1N5281 SILICON PLANAR ZENER DIODES**

Type	Zener Voltage Range1)		Maximum zener impedance 1)			Maximum Reverse Leakage Current		Temp.Coefficient of zener diode
	VZNOM 3)	I <sub>ZT</sub>	r <sub>zjt</sub> and r <sub>zjk</sub> at I <sub>zk</sub>			I <sub>R</sub> 2) at V <sub>R</sub>		
	V	mA	Ω	Ω	mA	μA	V	%/K
1N5250	20	6.2	<25	<600	0.25	<0.1	15	<+0.086
1N5251	22	5.6	<29				17	<+0.087
1N5252	24	5.2	<33				18	<+0.088
1N5253	25	5.0	<35				19	<+0.089
1N5254	27	4.6	<41				21	<+0.090
1N5255	28	4.5	<44				21	<+0.091
1N5256	30	4.2	<49				23	<+0.091
1N5257	33	3.8	<58				25	<+0.092
1N5258	36	3.4	<70				27	<+0.093
1N5259	39	3.2	<80				30	<+0.094
1N5260	43	3.0	<93	<900	<0.1	<0.1	33	<+0.095
1N5261	47	2.7	<105				36	<+0.095
1N5262	51	2.5	<125				39	<+0.096
1N5263	56	2.2	<150				43	<+0.096
1N5264	60	2.1	<170				46	<+0.097
1N5265	62	2.0	<185				47	<+0.097
1N5266	68	1.8	<230				52	<+0.097
1N5267	75	1.7	<270				56	<+0.098
1N5268	82	1.5	<330				62	<+0.098
1N5269	87	1.4	<370				68	<+0.099
1N5270	91	1.4	<400	<2300	<0.1	<0.1	69	<+0.099
1N5271	100	1.3	<500				75	<+0.100
1N5272	110	1.2	<700				83	<+0.100
1N5273	120	1.0	<950				90	<+0.100
1N5274	130	0.95	<1100				98	<+0.110
1N5275	140	0.90	<1300				105	<+0.110
1N5276	150	0.85	<1500				113	<+0.110
1N5277	160	0.80	<1700				120	<+0.115
1N5278	170	0.74	<1900				127	<+0.115
1N5279	180	0.68	<2200				135	<+0.120
1N5280	190	0.66	<2400				142	<+0.120
1N5281	200	0.65	<2500				150	<+0.120

(1)The Zener impedance is derived from the 60Hz Ac voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I<sub>ZT</sub>) is superimposed on I<sub>ZT</sub> or I<sub>zk</sub>. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

(2)Valid provided that leads at a distance of 8mm from case are kept at ambient temperature.

(3) Measured under thermal equilibrium and DC test conditions.

**CE**

CHENYI ELECTRONICS

**1N5221 THRU 1N5281****0.5W SILICON PLANAR ZENER DIODES**

---

**1N5221..1N5281 SILICON PLANAR ZENER DIODES**

---

Admissible power dissipation versus ambient temperature

(Valid provided that leads at a distance of 10mm from case  
are kept at ambient temperature)