
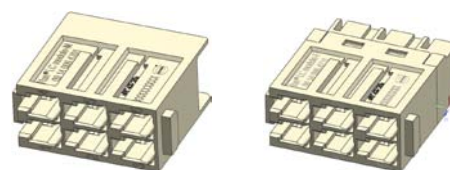








Number of contacts

6



Part-Number				
Identification	Male insert (M)	Female insert (F)	Drawings	Dimensions in mm
LC module order contacts separately  	09 14 006 4701	09 14 006 4711	M  F   	Contact arrangement View termination side

Part-Number			
Identification	Male insert (M)	Drawings	Dimensions in mm
LC contact  for multi mode for cable $\varnothing \leq 3 \text{ mm}$ for cable $\varnothing \leq 2 \text{ mm}$ for single mode for cable $\varnothing \leq 3 \text{ mm}$ for cable $\varnothing \leq 2 \text{ mm}$	20 10 125 8211 20 10 125 8212 20 10 125 8220 20 10 125 8221		

Features

- Suitable for HARTING LC contacts
- For GI-Fibre 50 - 62.5 / 125 µm and for single mode fibre
- Using of guiding pins (male and female) is obligatory

Technical characteristics

Inserts

Number of contacts	6
Material	polycarbonate
Limiting temperatures	-40 °C ... +85 °C
Flammability acc. to UL 94	V 0
Mechanical working life	≥ 500 mating cycles