



GSD

2022-2-9

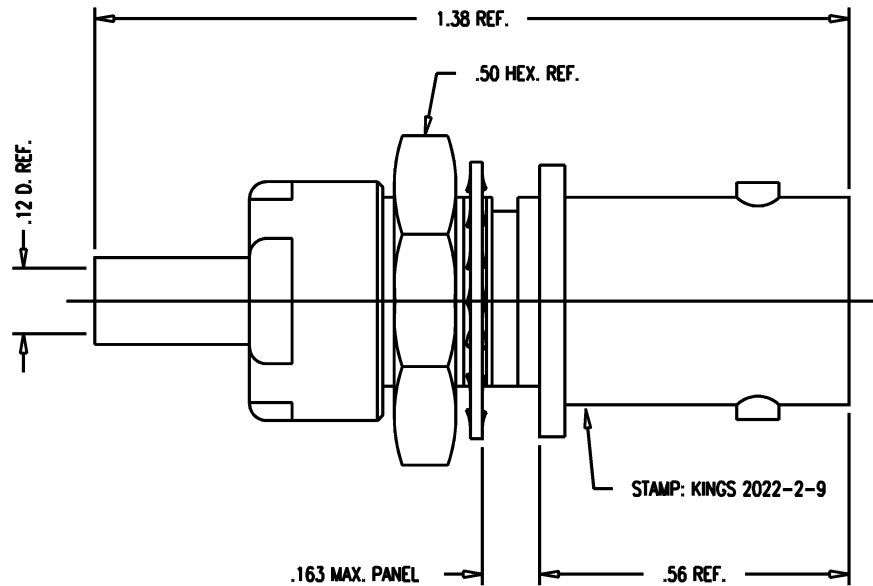

MOUNTING HOLE

NOTES:

1. FOR USE WITH M17/119-RG174, M17/094-RG179 & M17/113-RG316 CABLES.
2. FOR CABLING INSTRUCTIONS SEE CP-470.
3. FOR CABLE TRIMMING USE KTD-165 & KTJ-110.
4. FOR CRIMPING USE DIE KTH-2011.
5. INTERFACE PER MIL-STD-348, FIG. 301-2 (AS APPLICABLE)..
6. MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-1457
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 - LOCKWASHER: PHOS. BRONZE, QQ-B-750
 - CENTER CONTACT: BER. COP., ASTM-B-196
 - ALL OTHER PARTS: BRASS, ASTM-B16
7. FINISHES:
 - CENTER CONTACT: HARD GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
8. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 4 GHz

REVISIONS

ISSUE	CHANGES	
	REVISION	DATE
0	ER 33689 JCA 01/30/92	
1	CN 36442 C KH 07/18/95	

JCA2466

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

JACK, BULKHEAD, 75 OHM BNC

DRAWN	JCA	01/30/92
DESIGN	LI	01/30/92
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

2022-2-9

GSD