



FEATURES

Small size - High voltage - High Capacitance

APPLICATIONS


Motor Run

Operating Temperature Range		-25°C to +85°C						
Capacitance Tolerance		+10% at 1 kHz, 25°C						
AC Voltage	70°C	250	275	300	350	370	400	450
	85°C	200	220	250	280	320	320	360
Maximum Over voltage		110% of rated VAC						
Dissipation Factor (MAX) Tan δ at 1 kHz and 25°C		1.0%						
Insulation Resistance	Terminal to Terminal				Terminal to Case			
	1000 MΩxμF After 1 minute of 100VDC applied between the terminals at 25°C				2000 MΩxμF After 1 minute of 100VDC applied between the terminals at 25°C			
Self Inductance		<1 nano-Henry per mm of lead spacing and lead length						
Long Term Stability		Capacitance variation <1% MAX after 2 years						
Dielectric Strength	Terminal to Terminal				Terminal to Case			
	175% of VAC applied for 60 Seconds and 25°C				200% of VAC+1000VAC or 2KVAC at 50/60 Hz applied between the terminals and case for 60 Seconds and 25°C, whichever is greater			
Agency certifications		UL – E144575 C22.2 No. 190-M1985						
Terminations		Connection: Insert stripped wire into contact hole Removal: Push probe or pin into the mounting hole and press down the contact slightly to release and remove the wire Release Probe or Pin Wire AWG 18-20 8 +1mm Stripped length Stripped Wire						




Mounting lead Options


Case Code B8

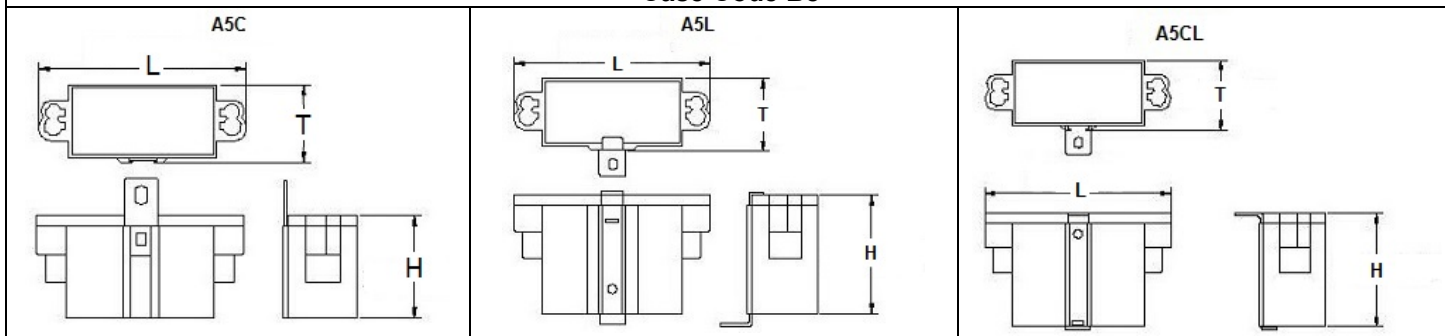

Case Code B5 and B5B

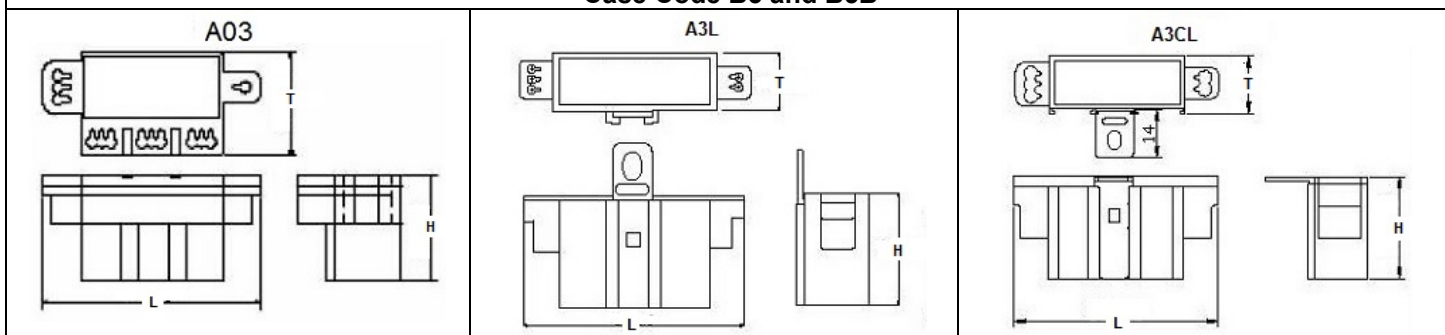

Case Code A3

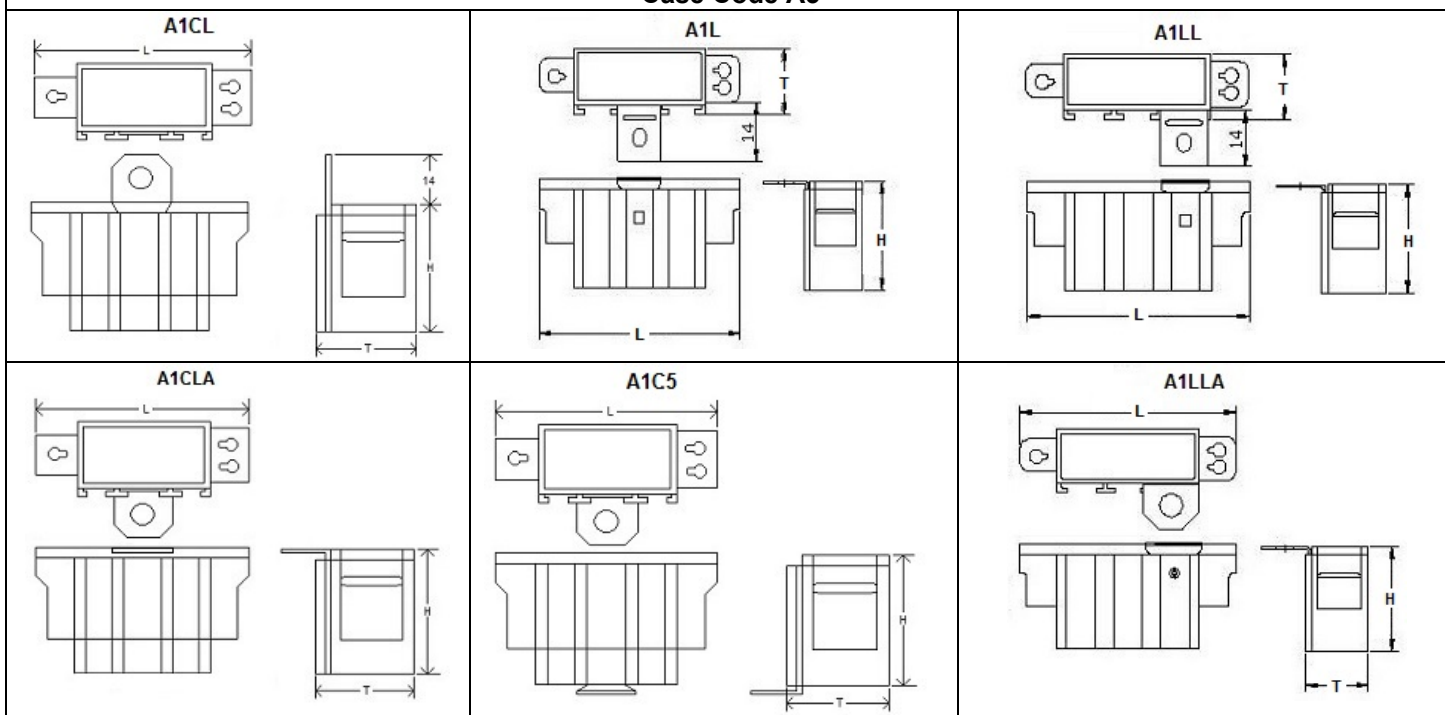

QPC

Radial leaded box

Capacitance (μF)	VAC	IC PART NUMBER	Dims LxHxT (mm)
0.4	450	404QPC450KA3#	46x24x13
0.5	400	504QPC400KA3#	46x24x13
0.6	350	604QPC350KA3#	46x24x13
0.8	300	804QPC300KA3#	46x24x22
0.9	275	904QPC275KA3#	46x24x13
1	250	105QPC250KA3#	46x24x13
1	400	105QPC400KB5#	52x26x18
1	400	105QPC400KB5B#	52x26x24
1	450	105QPC450KA3#	46x24x13
1	450	105QPC450KB5#	52x26x18
1	450	105QPC450KB5B#	52x26x24
1.2	250	125QPC250KA3#	46x24x13
1.2	400	125QPC400KA3#	46x24x13
1.5	250	155QPC250KA3#	46x24x13
1.5	400	155QPC400KB5#	52x26x18
1.5	400	155QPC400KB5B#	52x26x24
1.8	350	185QPC350KA3#	46x24x13
1.8	350	185QPC350KB5#	52x26x18
1.8	350	185QPC350KB5B#	52x26x24
2	250	205QPC250KA3#	46x24x13
2	400	205QPC400KB5#	52x26x18
2	400	205QPC400KB5B#	52x26x24
2	450	205QPC450KB5#	52x26x18
2	450	205QPC450KB5B#	52x26x24
2.5	250	255QPC250KA3#	46x24x13
2.5	300	255QPC300KA3#	46x24x22
2.5	300	255QPC300KB5#	52x26x18
2.5	300	255QPC300KB5B#	52x26x24
2.5	350	255QPC350KB5#	52x26x18
2.5	350	255QPC350KB5B#	52x26x24
2.5	400	255QPC400KB5#	52x26x18
2.5	400	255QPC400KB5B#	52x26x24
2.7	400	275QPC400KB5#	52x26x18
2.7	400	275QPC400KB5B#	52x26x24
3	250	305QPC250KA3#	46x24x13
3	275	305QPC275KA3#	46x24x13

Capacitance (μF)	VAC	IC PART NUMBER	Dims LxHxT (mm)
3	400	305QPC400KB8#	53x30x22
3.3	450	335QPC450KB8#	53x30x22
3.5	250	355QPC250KA3#	46x24x13
3.5	350	355QPC350KB8#	53x30x22
4	250	405QPC250KA3#	46x24x13
4	250	405QPC250KB5#	52x26x18
4	250	405QPC250KB5B#	52x26x24
4	300	405QPC300KB8#	53x30x22
4	370	405QPC370KB8#	53x30x22
4	400	405QPC400KB8#	53x30x22
4.5	250	455QPC250KB5#	52x26x18
4.5	250	455QPC250KB5B#	52x26x24
4.5	300	455QPC300KB5B#	52x26x24
4.5	300	455QPC300KB5#	52x26x18
5	250	505QPC250KA3#	46x24x13
5	250	505QPC250KB5#	52x26x18
5	250	505QPC250KB5B#	52x26x24
5	250	505QPC250KB8#	53x30x22
5	275	505QPC275KB8#	53x30x22
5	370	505QPC370KB8#	53x30x22
5.5	275	555QPC275KA3#	52x27x18
5.5	350	555QPC350KA3#	53x30x22
6	250	605QPC250KB5#	52x26x18
6	250	605QPC250KB5B#	52x26x24
6	250	605QPC250KB8#	53x30x22
6	370	605QPC370KB8#	53x30x22
7	250	705QPC250KB5#	52x26x18
7	250	705QPC250KB5B#	52x26x24
7	250	705QPC250KB8#	53x30x22
7	300	705QPC300KB8#	53x30x22
7	300	705QPC300KB5#	53x30x22
8	250	805QPC250KB8#	53x30x22
8	275	805QPC275KB8#	53x30x22
9	250	905QPC250KB8#	53x30x22
10	250	106QPC250KB8#	53x30x22