

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [85003-9023](#)
Status: **Active**
Overview: [DIN 41612](#)
Description: 2.54mm Pitch DIN 41612 C Style Male Header, Right Angle, Through Hole, 0.30µm Gold (Au) Plating, 32 Circuits, No Mounting Clips, No Flux Proof, Lead-Free

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85003](#)
Application Backplane
Comments No Mounting Clips. No Flux Proof
Component Type PCB Header
Overview [DIN 41612](#)
Product Name IEC 603-2/DIN 41612
Style C
UPC 756054404324

Physical

Circuits (Loaded) 32
Circuits (maximum) 96
Circuits Detail Standard Contacts at: A:a2,a4,a6,a8,...,a32;
C:c1,c3,c5,c7,...c31
Color - Resin Gray
Durability (mating cycles max) 50
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Material - Metal Brass
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin Polyester
Net Weight 9.924/g
Number of Columns 16
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Right Angle
PC Tail Length 3.00mm
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Tray
Pitch - Mating Interface 2.54mm
Pitch - Termination Interface 2.54mm
Plating min - Mating 0.305µm
Plating min - Termination 2.540µm
Polarized to PCB Yes
Stackable No
Temperature Range - Operating -55°C to +125°C

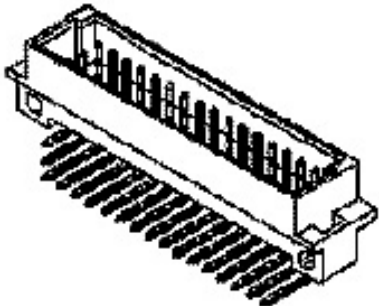

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[85003Series](#)

Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.5A
Data Rate	622.0 Mbps
Voltage - Maximum	250V AC (RMS)
Solder Process Data	
Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	206
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-85003-9023

This document was generated on 04/27/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

85003-9023