





SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION,
WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DOC. NO.	SPC-F005	Effective: 7/8/02	DCP No: 1398
			DRAWN	DATE	CHECKD	DATE
			VEE	03-08-10	JAG	04-08-10
					XXX	17-08-10

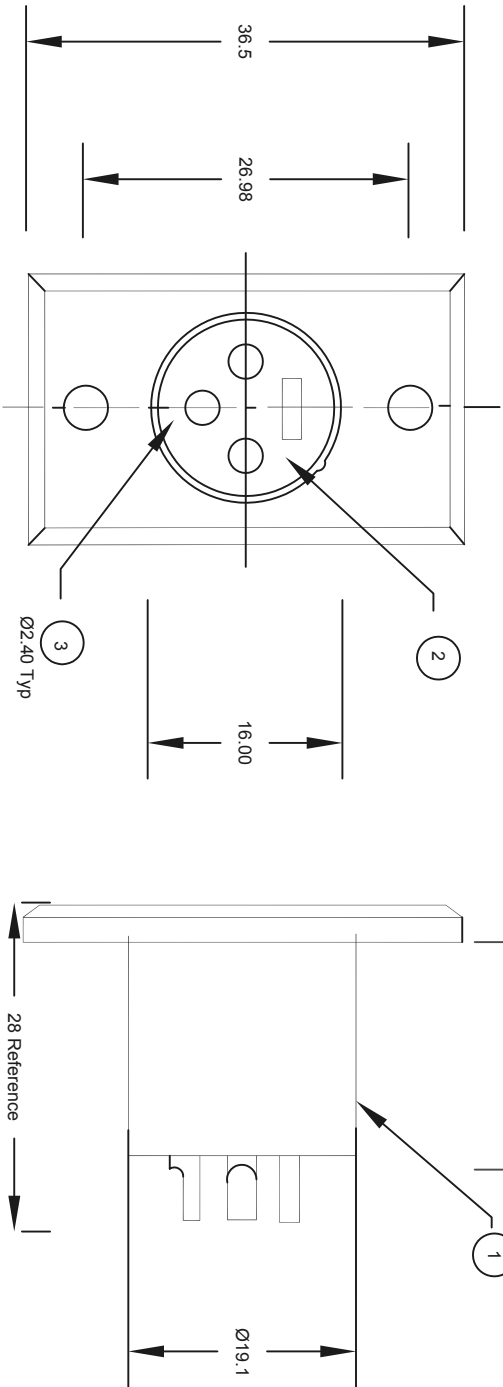

Ø3.45 Hole thru
(2 pics)

Dimensions : Millimeters

Electrical Specifications:

1. Contact rating : 16A @125 VAC
2. Contact resistance : 5 milliohms maximum
3. Insulation resistance : 5000 Megohms minimum at 500 VDC
4. Dielectric strength : 1400 VACV
5. Capacitance : 4pF maximum

Mechanical Specifications:

1. Insertion force : 1.0 to 8.0kg
2. Withdrawal force : 1.0 to 8.0kg

Environmental Specifications:

1. Operating temperature : -55°C to 70°C

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE
SPECIFIED, ALL
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY:

VEE

DATE:

03-08-10

SIZE

DWG. NO.

ELECTRONIC FILE

84N1104

REV

A

CHECKED BY:

JAG

DATE:

04-08-10

SCALE:

NTS

SHEET:

1 OF 1

Item	Part	Material/Finish
1	Housing	Zinc Die Cast, Nickel Plated
2	Insert insulator	PP0-1, UL94V-0, Gray
3	Pin	Brass, Silver Plated

Part Number Table

Description	Part Number
Male XLR Type Audio Receptacle	SPC21426