





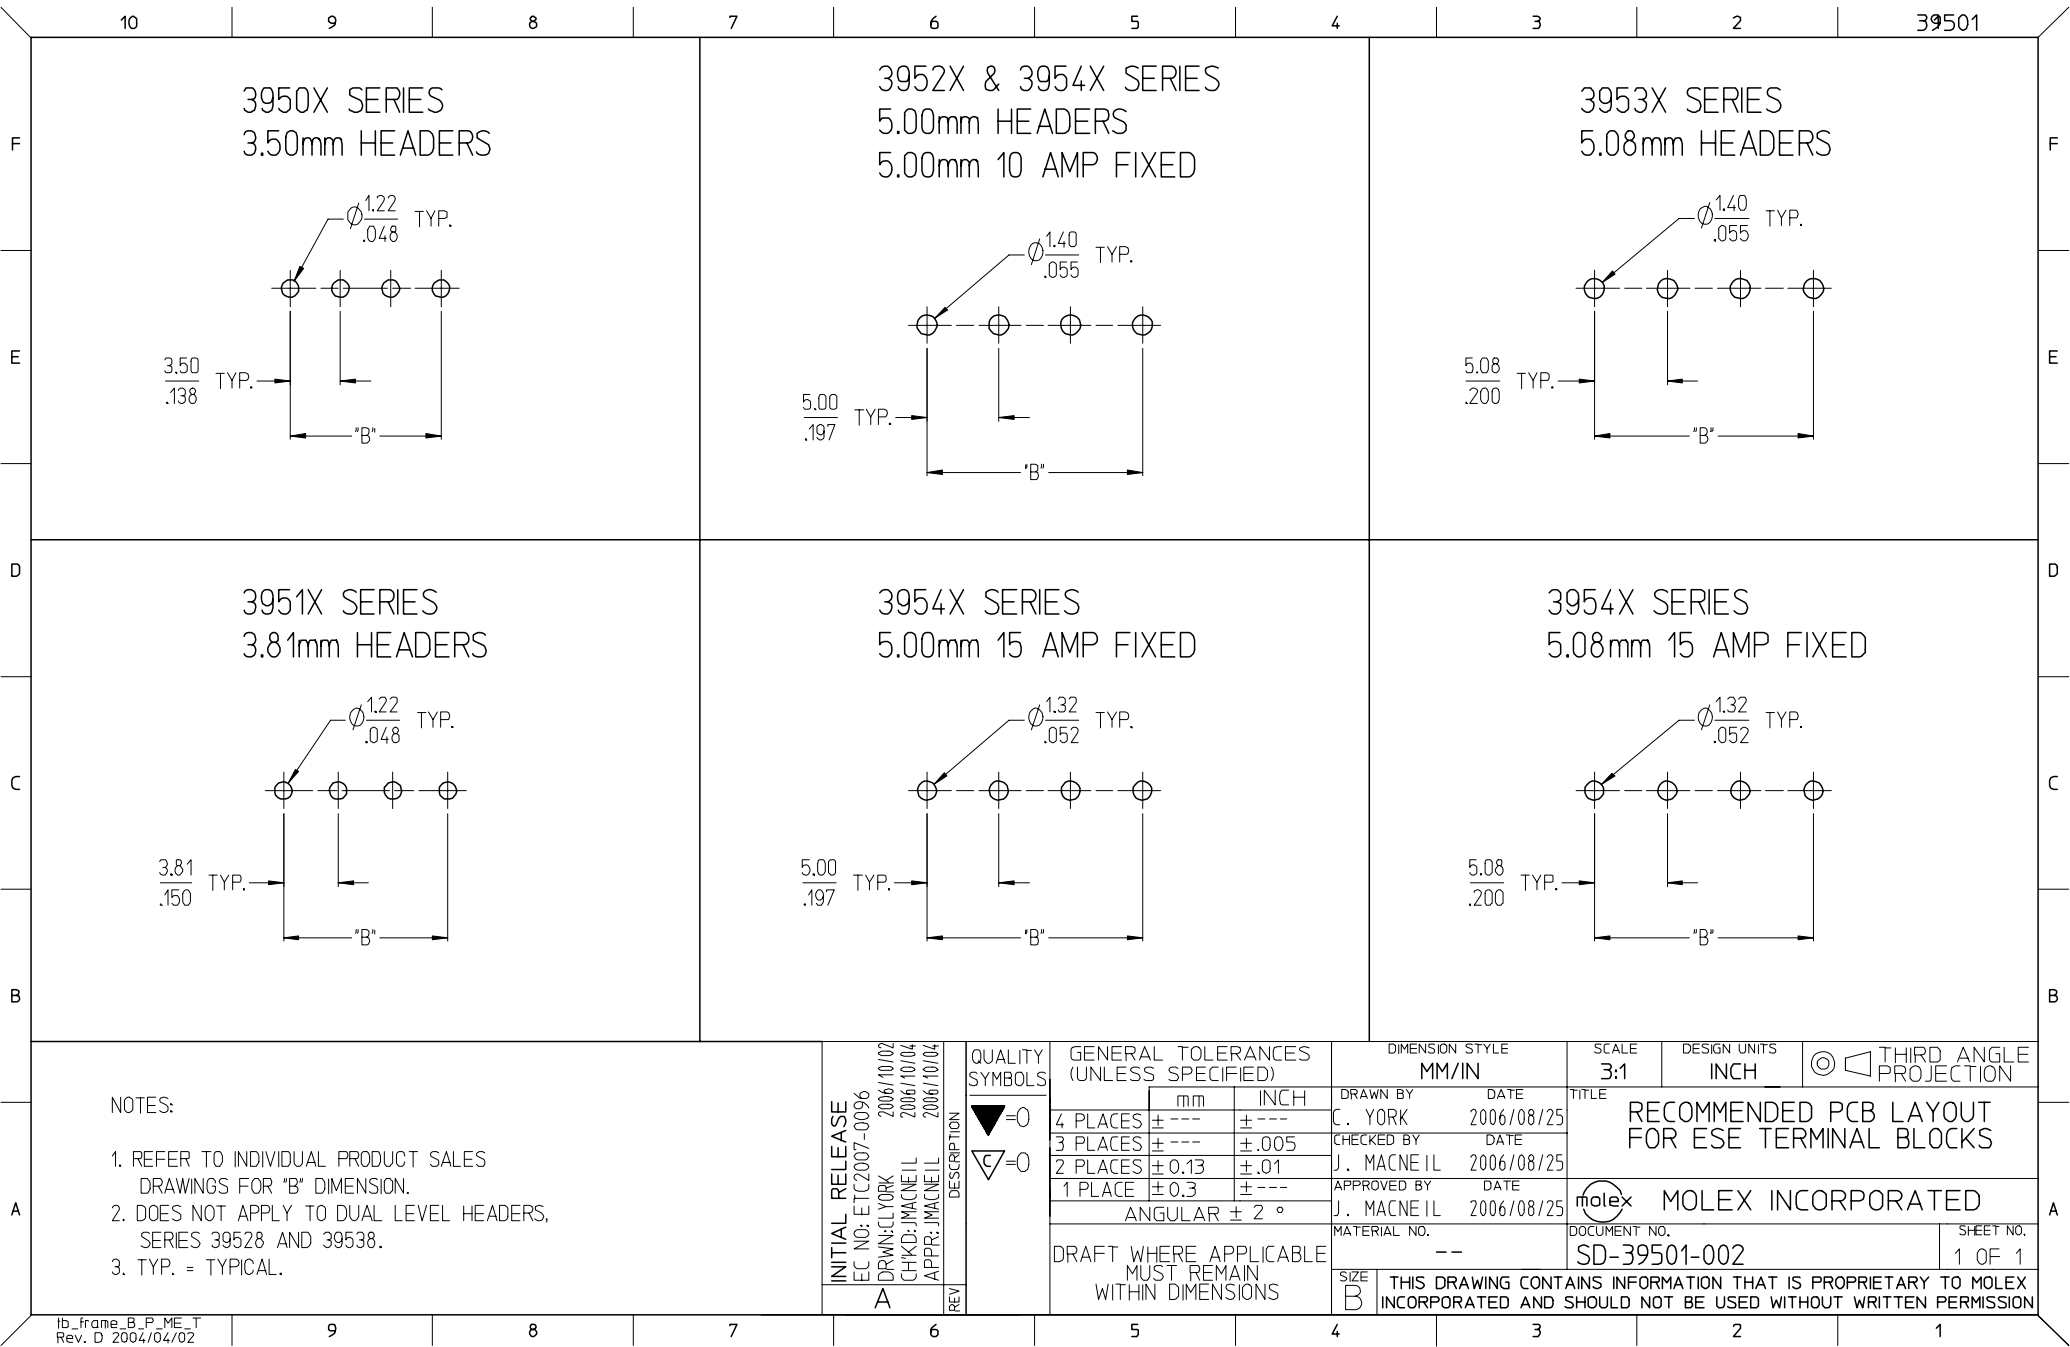

- SPECIFICATIONS:**
- 1. Material:
 - (1). Body: PA46
 - (2). Pin: Brass
 - 2. Wire range: N/A
 - 3. Electrical rating: 300V, 15A.
 - 4. Wire strip length: N/A
 - 5. Operating temperature: -40C to +140C.
 - 6. Max torque: N/A
 - 7. Insulation resistance: DC 500V, 500M.
 - 8. Dielectric withstand: AC 2500V for 1 minute.
 - 9. Breakdown voltage: 4000V.
 - 10. A = (N x P) + 2.0mm
 - 11. B = (N - 1) x P
 - 12. P (PITCH) = 5.0mm (.197").
 - 13. N = Number of positions available 2 through 24.

ENTER DESCRIPTION EC NO: NEO2006-0310 DRWN: LROTHAUS 2006/01/09 CHKD: CYORK 2006/01/09 APPR: JPAWLICK 2006/01/10 A	DESCRIPTION	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 5.0MM, EURO HEADER, VERTICAL, HI-TEMP
					DRAWN BY LROTHAUS	DATE 12/6/05	TITLE MOLEX INCORPORATED		
					CHECKED BY C. YORK	DATE 01/06/06			
					APPROVED BY	DATE			
			ANGULAR ± 2 °		MATERIAL NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE B		SEE CHART		SD-39521-001		1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

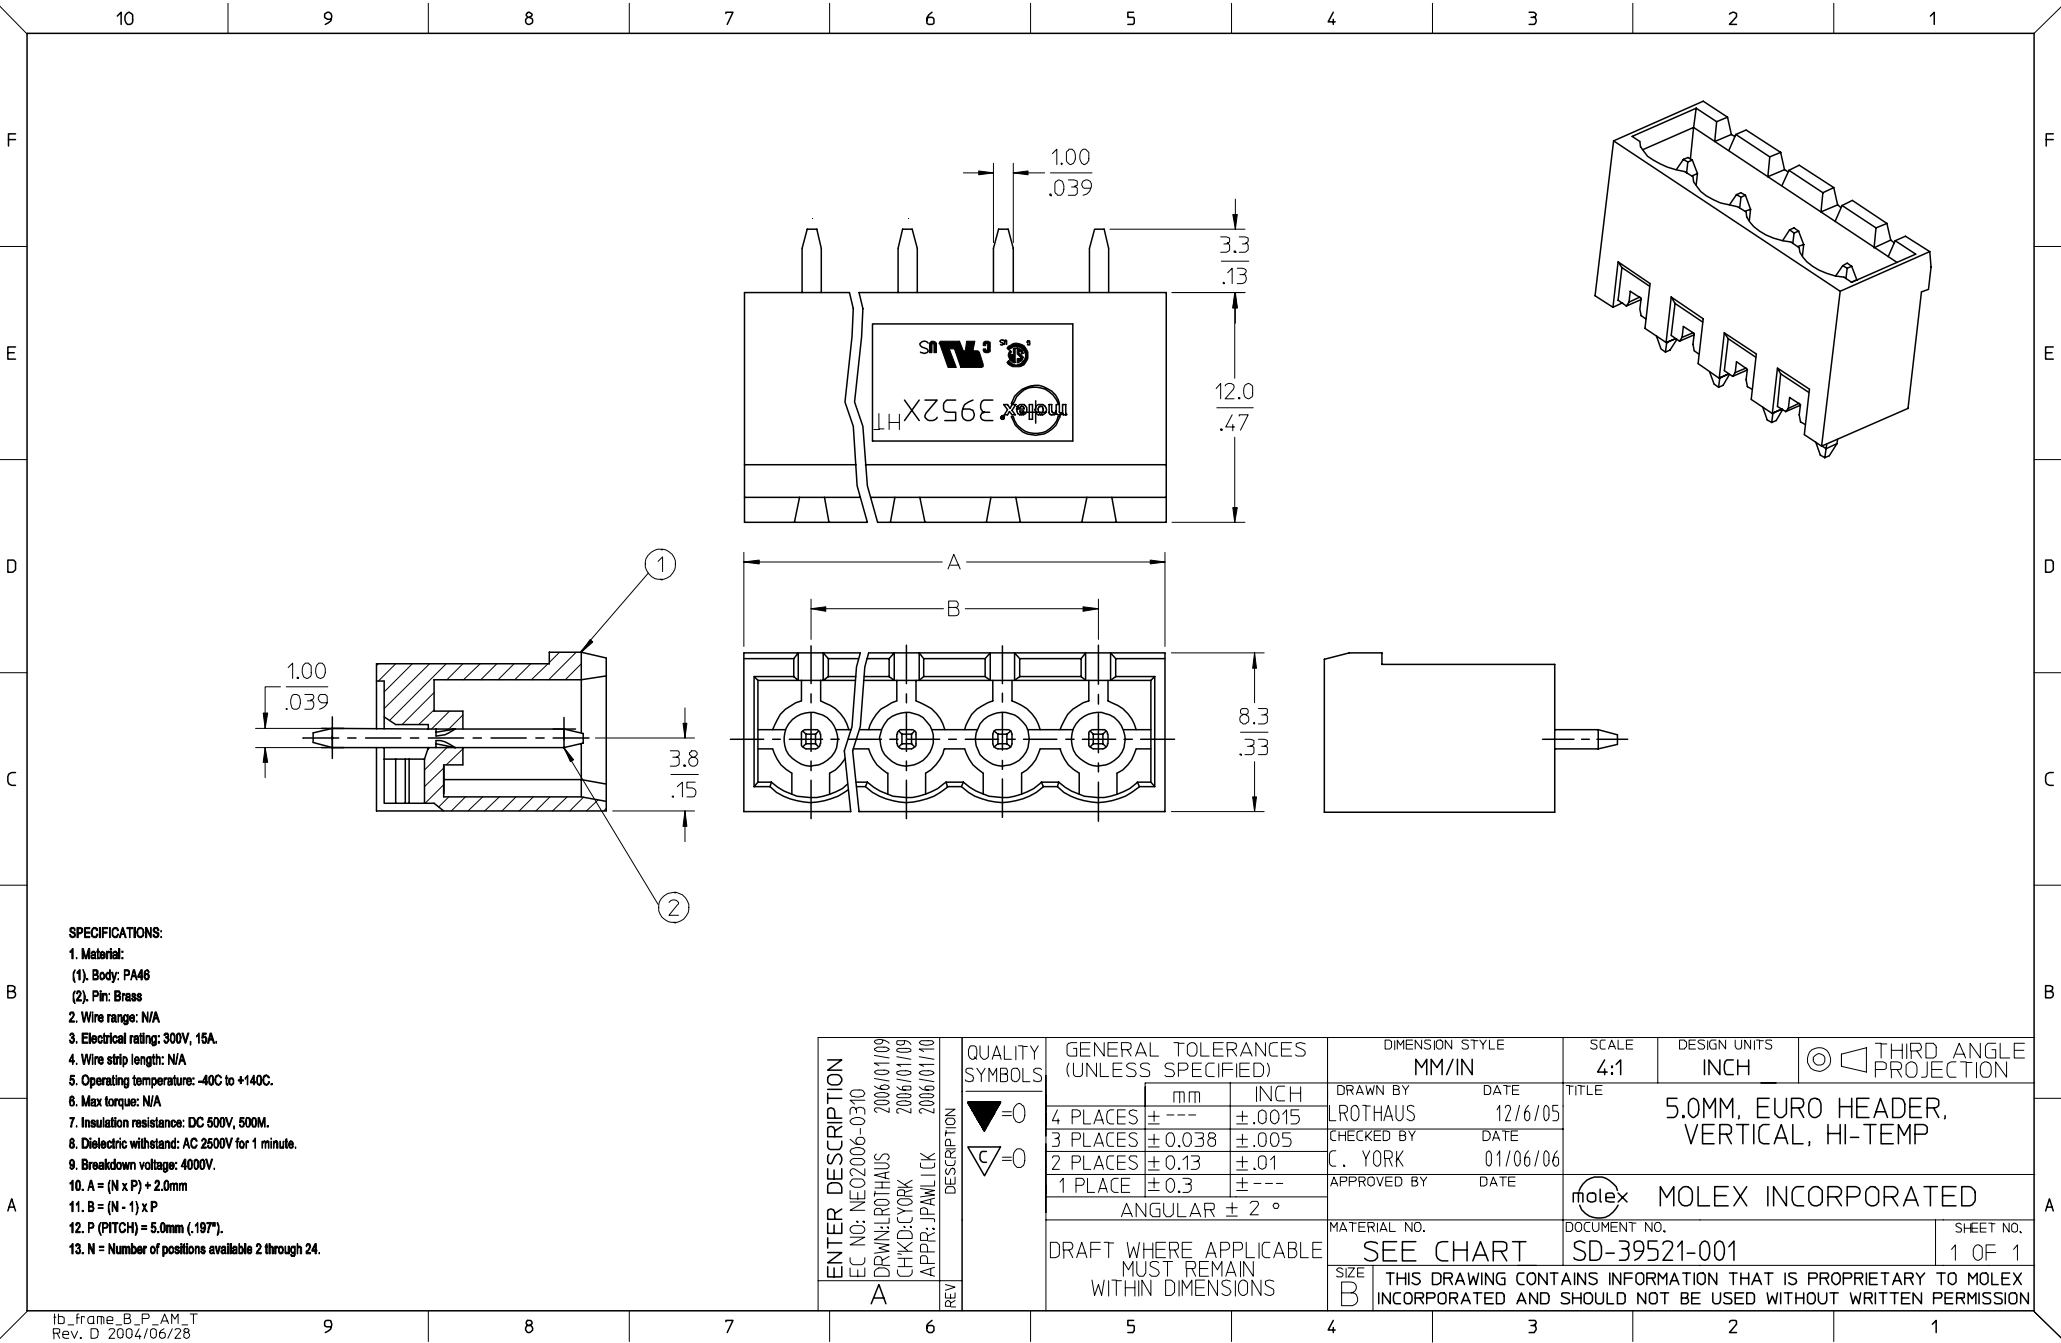