




(B) SPECIFICATIONS:

- MATERIAL:
 - BODY: PA66 (UL 94V-0).
 - PIN: BRASS.
 - COVER: PBT (UL 94V-0).
- ELECTRICAL RATING: 300V, 15A.
- DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
- BREAKDOWN VOLTAGE: 4000V.
- INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
- OPERATING TEMPERATURE: -40°C TO +105°C.
- NUMBER OF CIRCUIT POSITIONS AVAILABLE= 4
THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
- ALL COMPONENTS ARE ROHS COMPLIANT.

REVISED/VOID #’S EC NO: ET2007-0020 DRWN: CYRK 2006/07/25 CHKD: JPAWLICKI 2006/07/25 APPR: JPAWLICKI 2006/07/26 B	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY	DATE	5.08MM, EURO DUAL HEADER HORIZONTAL, OPEN END, STACKABLE			
			4 PLACES	± ---	± ---	L. ROTHHAUS				2005/12/06
			3 PLACES	± ---	± .005	CHECKED BY				DATE
			2 PLACES	± 0.13	± .01	C. YORK				2006/01/06
			1 PLACE	± 0.3	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED		
ANGULAR ± 2 °		J. PAWLICKI	2006/01/10	MATERIAL NO.	DOCUMENT NO.	SHEET NO.				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-39538-001		1 OF 2				
B	REV		SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

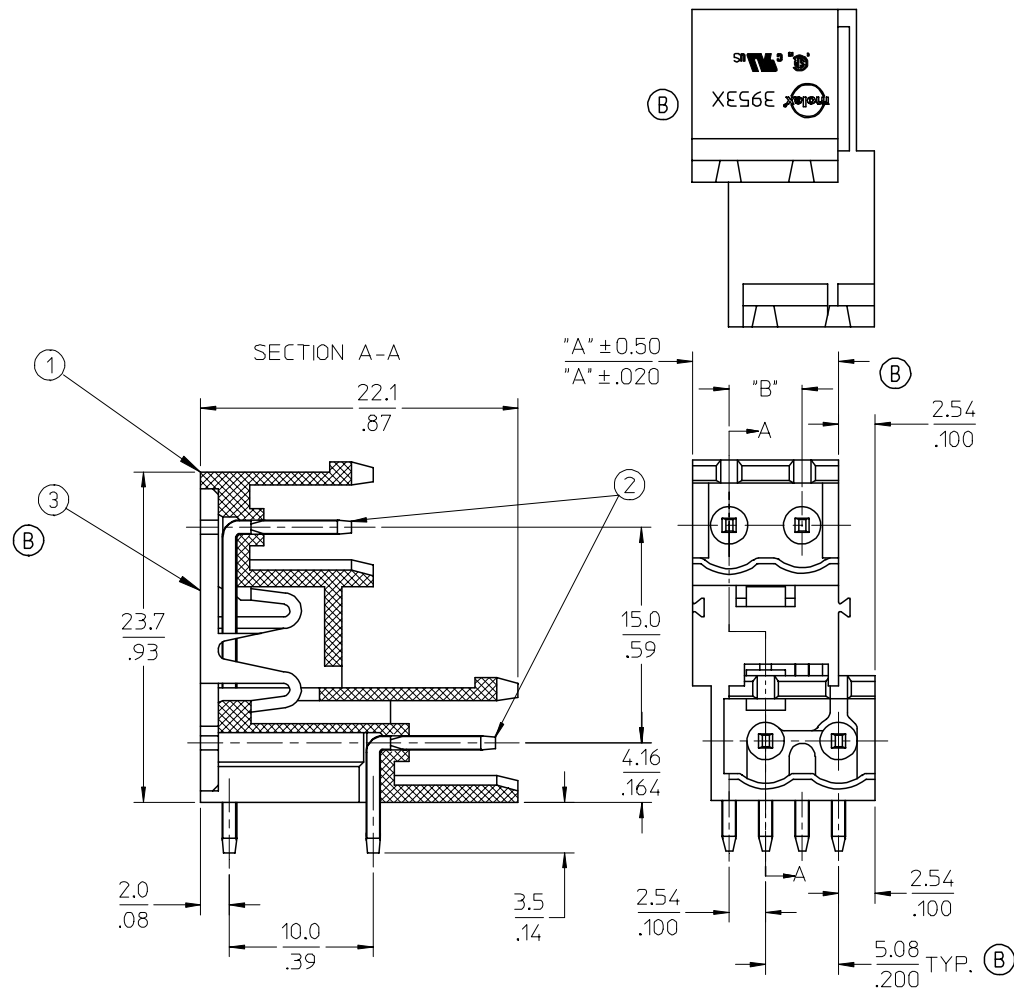