

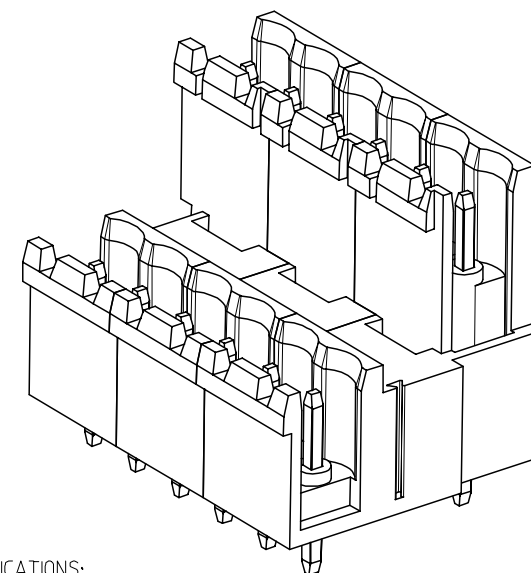
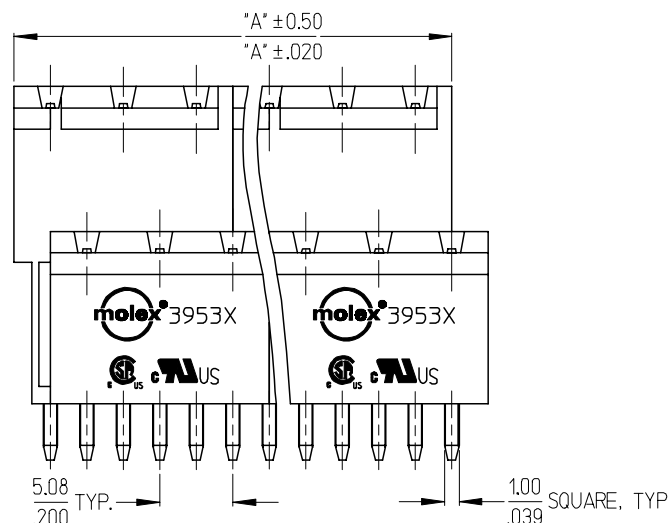
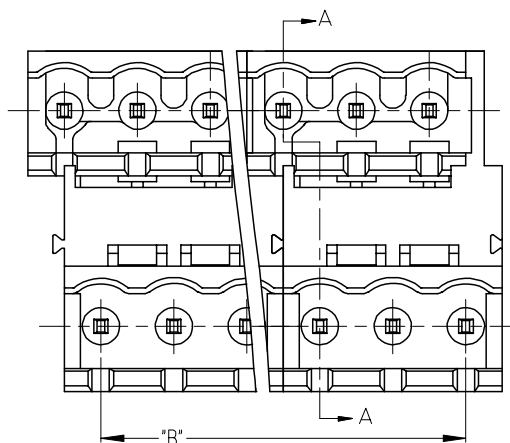


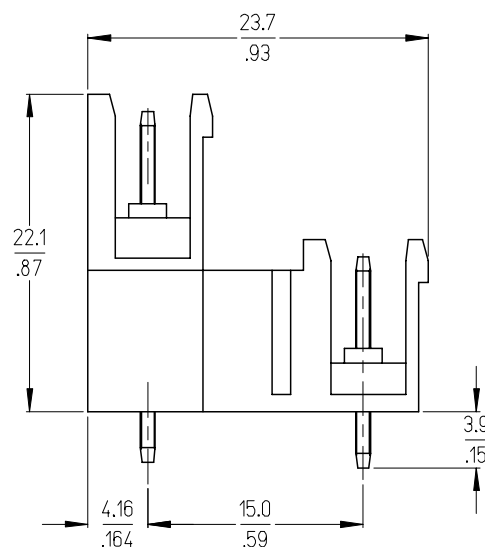

SPECIFICATIONS:

1. MATERIAL:
 - (1) BODY: PA66 (UL 94V-0).
 - (2) COVER: PBT (UL 94V-0).
 - (3) LONG TERMINAL: BRASS.
 - (4) SHORT TERMINAL: BRASS.
2. ELECTRICAL RATING: 300V, 15A.
3. DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
4. BREAKDOWN VOLTAGE: 4000V.
5. INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
6. OPERATING TEMPERATURE: -40°C TO +105°C.
7. NUMBER OF CIRCUIT POSITIONS AVAILABLE= 4
THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
8. ALL COMPONENTS ARE ROHS COMPLIANT.

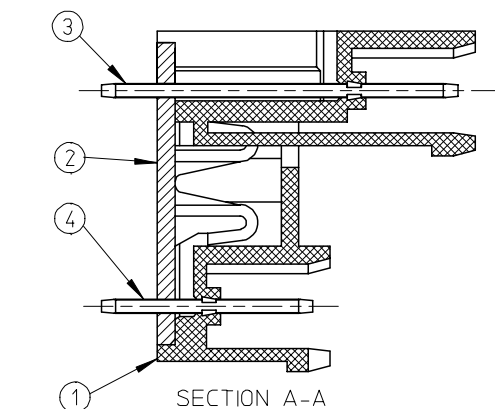

INITIAL RELEASE EC NO: ETC2007-0020 DFWN: C YORK 2006/07/25 CHK'D: J PAWLICKI 2006/07/26 APPR: J PAWLICKI 2006/07/26	DESCRIPTION A	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY C. YORK	DATE 2006/07/24	TITLE 5.08MM, EURO DUAL HEADER VERTICAL, OPEN END, STACKABLE	
			4 PLACES	± ---	± ---	CHECKED BY J. PAWLICKI	DATE 2006/07/24		
			3 PLACES	± ---	± .005	APPROVED BY J. PAWLICKI	DATE 2006/07/24		
			2 PLACES	± 0.13	± .01	MATERIAL NO. SEE SHT. 2	DOCUMENT NO. SD-39538-003	SHEET NO. 1 OF 2	
			1 PLACE	± 0.3	± ---				
			ANGULAR ± 2 °						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
REV	SIZE B	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

