

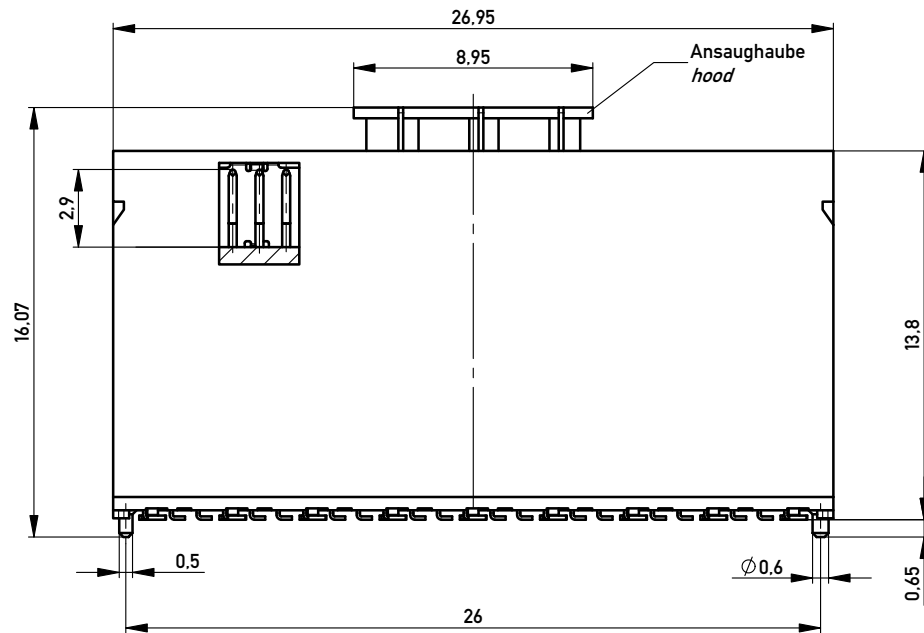
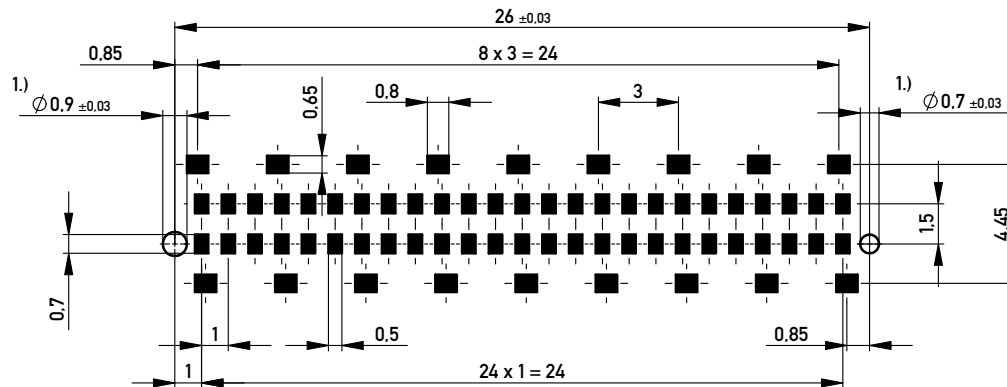


Leiterplatten-Layout Vorschlag / PCB-layout proposal

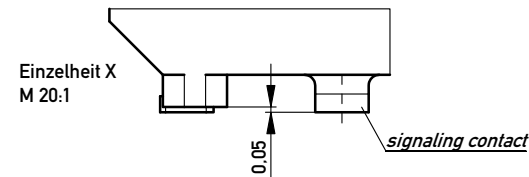


1.) Durchmesser des Bohrers / Drill tool

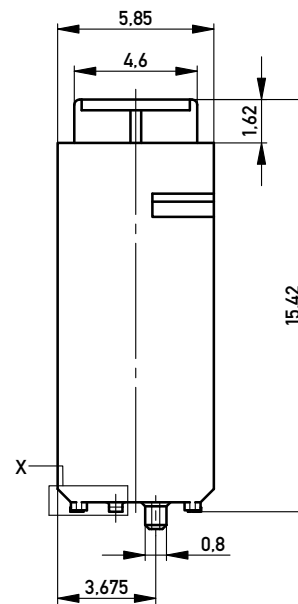


Einzelheit X
M 20:1

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 220 Stück
Packaging unit: 220 pcs



Abspulrichtung - Reel off Direction

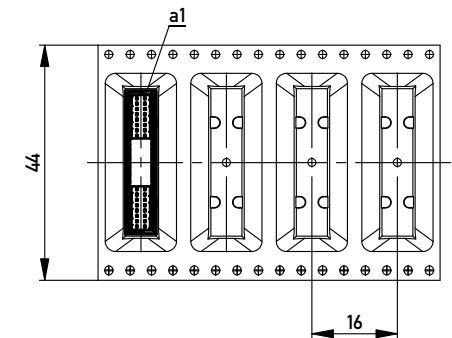

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0.1 mm
Coplanarity Area of Termination ≤ 0.1 mm

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9001 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 5:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation Messerleiste10mm SMD, 50 polig <i>Male 10mm SMD, 50 contacts</i>					
						224561					
j		22.04.2013		 www.ERNI.com						I	
Index		Date						Class		MSPEED	
										A3	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.