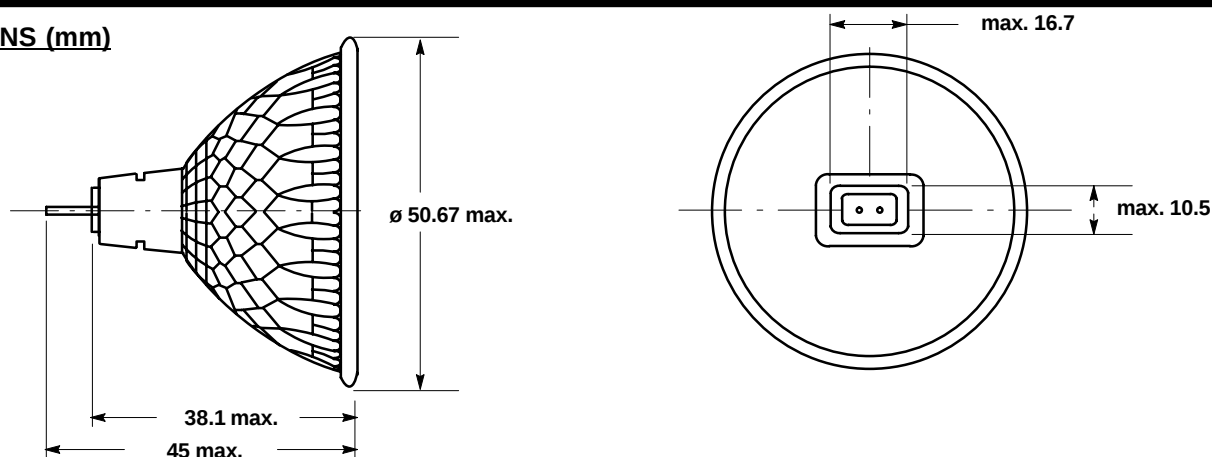
**DIMENSIONS (mm)**

Coil : axial
Lens : clear, flat
Reflector : dichroic
Cap : GX 5.3 (IEC 61-1 sheet 7004-73A) GU 5.3 (IEC 61-1 sheet 7004-109)

ELECTRICAL DATA:		NOMINAL VALUE	MIN.	MAX.
Lamp rated wattage (W)	:	50	-	54
Lamp operating voltage (V)	:	12	-	-

OPERATING CONDITIONS:

Pinch temperature (°C)	:	-	-	350
Reflector rim temperature (°C)	:	-	-	200
Burning position	:	any		

LAMP LIFE :

Average life (50% failure rate)(h)	:	3000
------------------------------------	---	------

PHOTOMETRIC DATA:

TYPE DESCRIPTION	BEAM ANGLE (degrees)	LUMINOUS INTENSITY (Cd)	ILCOS CODE
WIDE FLOOD	38°	1750	HRG-50-12-GU5.3-51/38
VERY WIDE FLOOD	60°	700	HRG-50-12-GU5.3-51/60
Colour temperature (K)	:	2950	

ATTENTION: The product must be used with suitable operating equipment and in accordance with the specified data.

APPLICATION: For further lamp data refer to EN 60 357, most recent edition.

Issued by : TIENEN
Date : 16.02.2005
Revision date :

DATA SHEET

Specification No. : 50-03-051
Supersedes :
Page 1 of 1