



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC AJ	DIST 16	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPROVED
				E	REV PER 0630-0431-98		28OCT98	MO

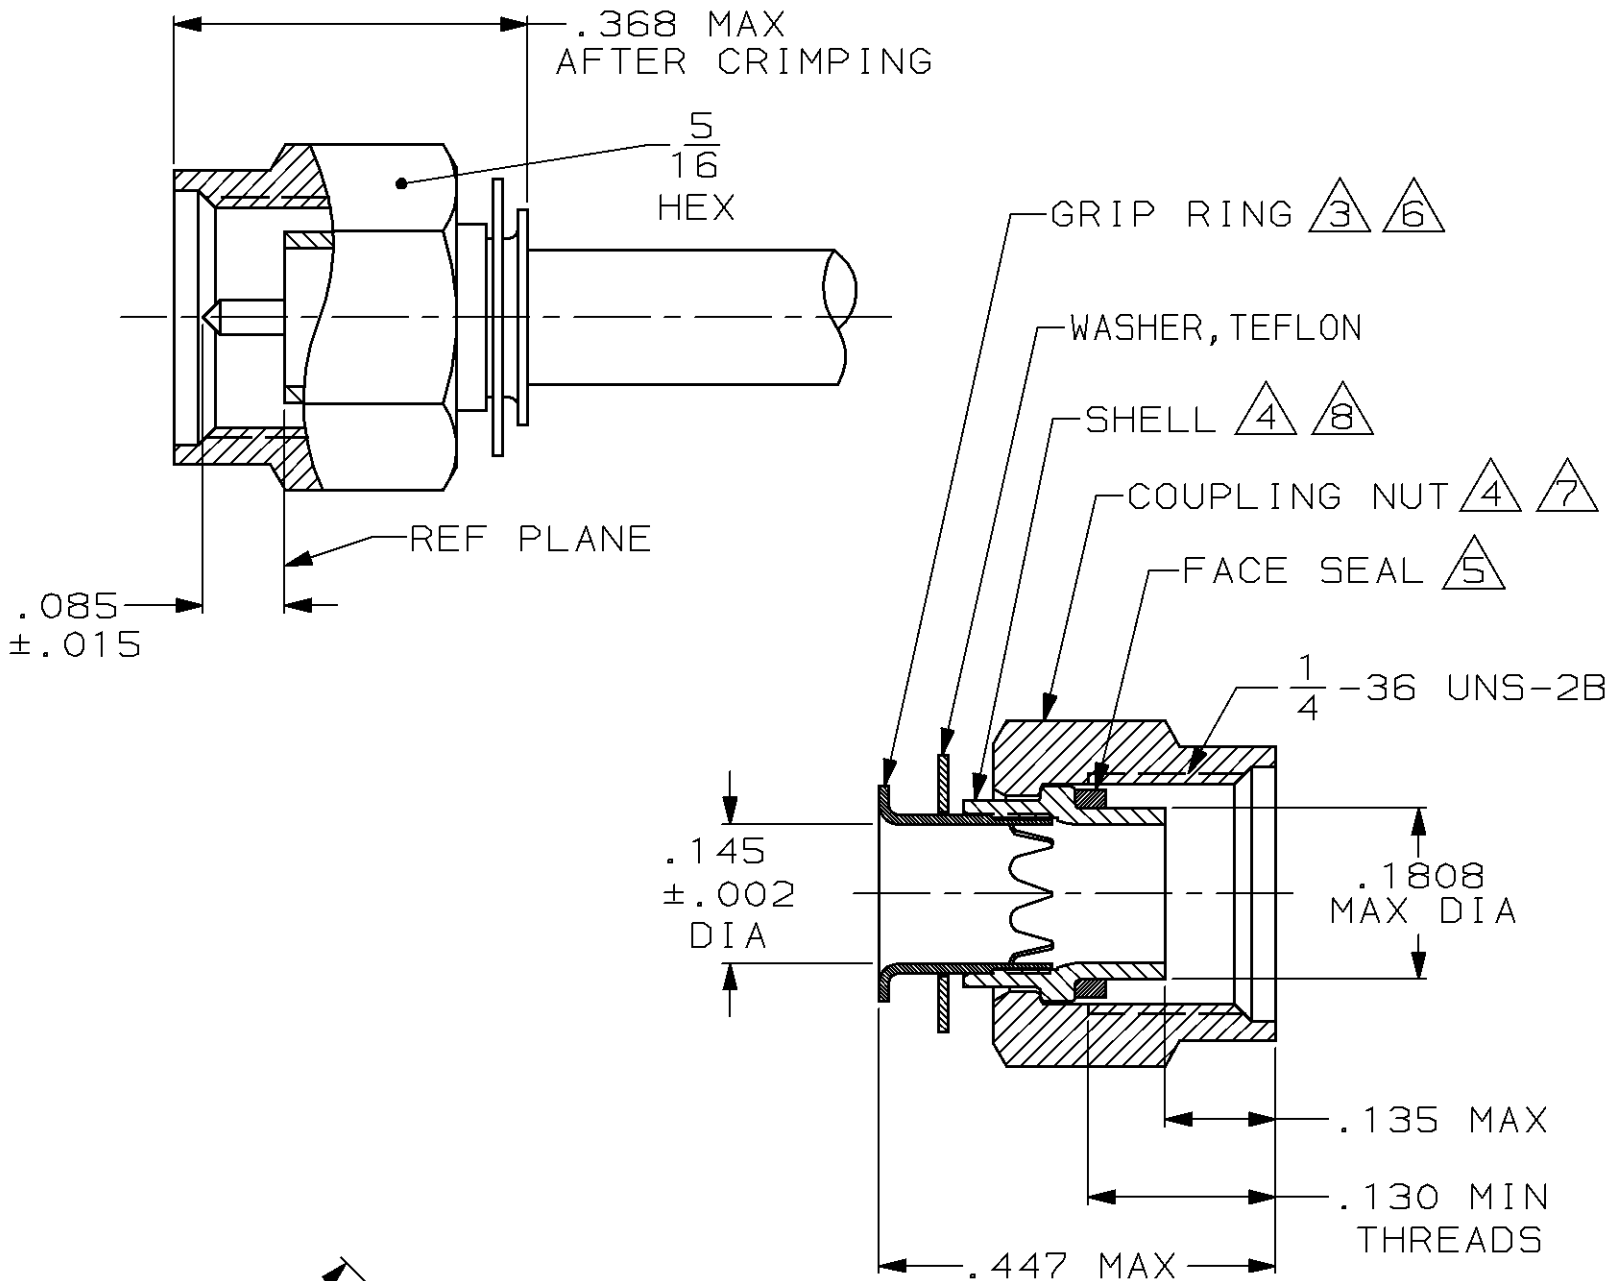

1. FOR USE WITH: RG-402/U, .141 SEMI RIGID CABLE
2. SEE I.S. 6788
3. BRASS PER ASTM-B-36
4. STAINLESS STEEL PER ASTM-A-582
5. SILICONE RUBBER PER ZZ-R-765
6. NICKEL PL PER QQ-N-290
7. PASSIVATION PER ASTM A967
8. 00779 M39012/92-3301
9. .500 MIN LENGTH OF STRAIGHT CABLE REQUIRED TO APPLY THE CONNECTOR

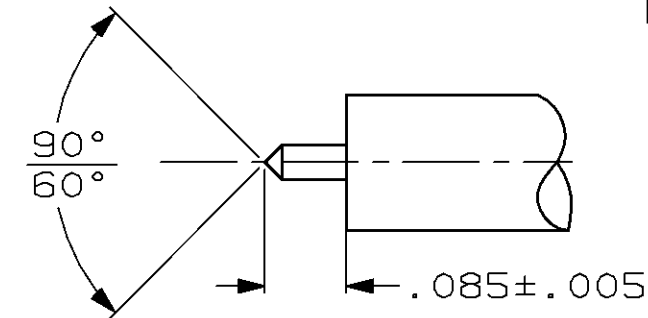

RECOMMENDED STRIP LENGTH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON:			228635-1		
2 PL DEC ±			PART NO		
3 PL DEC ±			AMP INCORPORATED Harrisburg, Pa. 17105		
ANGLES ±			NAME PLUG, RF, SERIES SMA		
MATERIAL 3 THRU 6			SIZE B		
FINISH 7 8			FSCM NO 00779		
DR 11-30-87 M.SNEED			DRAWING NO 228635-1		
CHK 1-4-88 D.HEIDE			SCALE 5:1		
APPD 1-4-88 D.HEIDE			SHEET 1 OF 1		
APPD 1-4-88 M.SNEED			CUSTOMER DRAWING		
PRODUCT SPEC 108-12055					
APPLICATION SPEC					
WEIGHT .063 OZ					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[228635-1](#)