

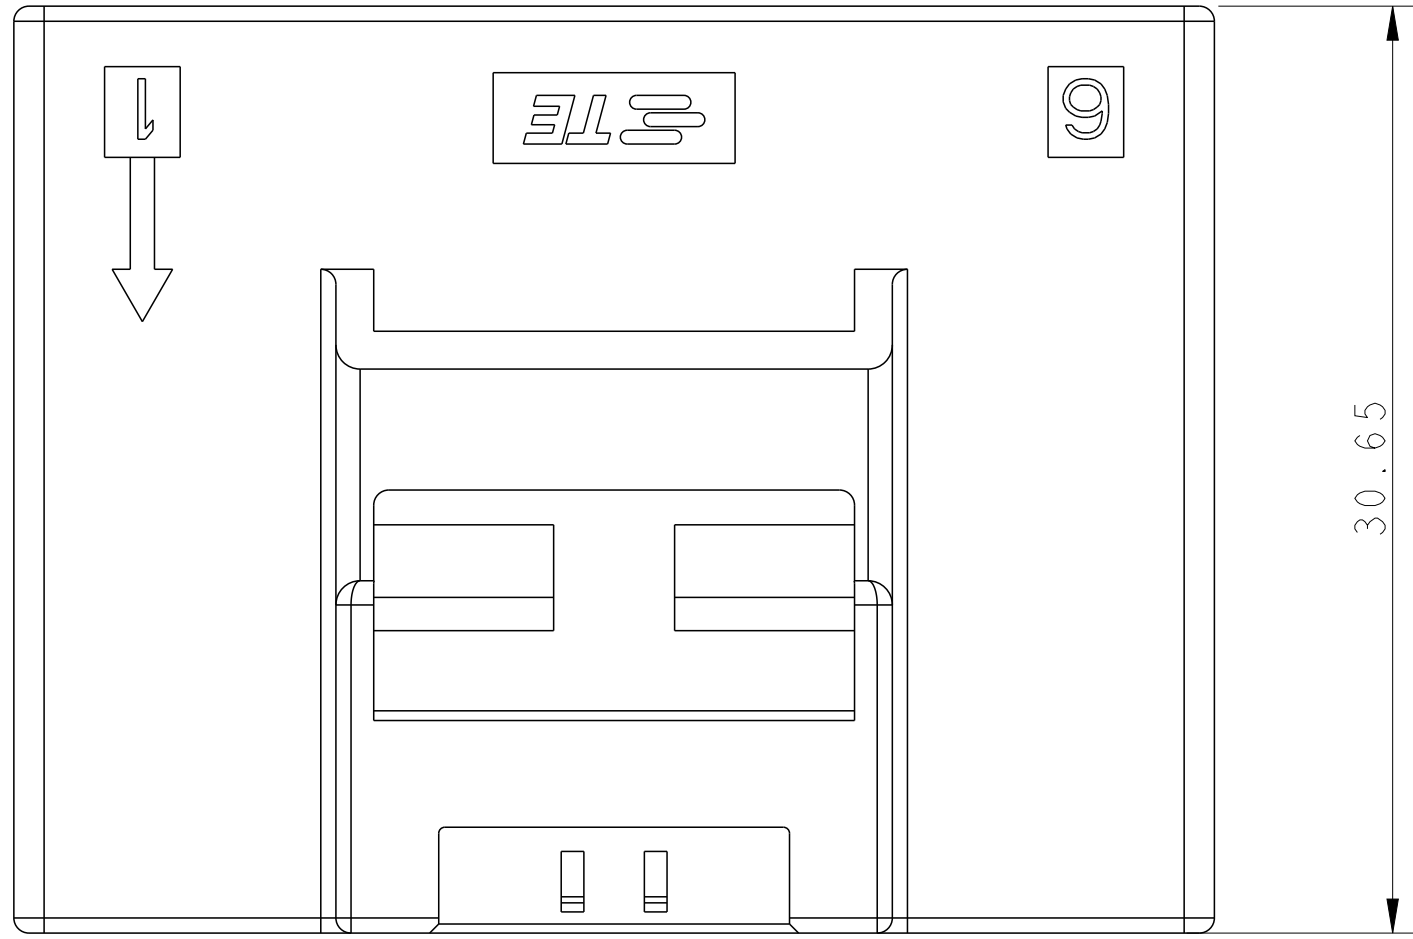
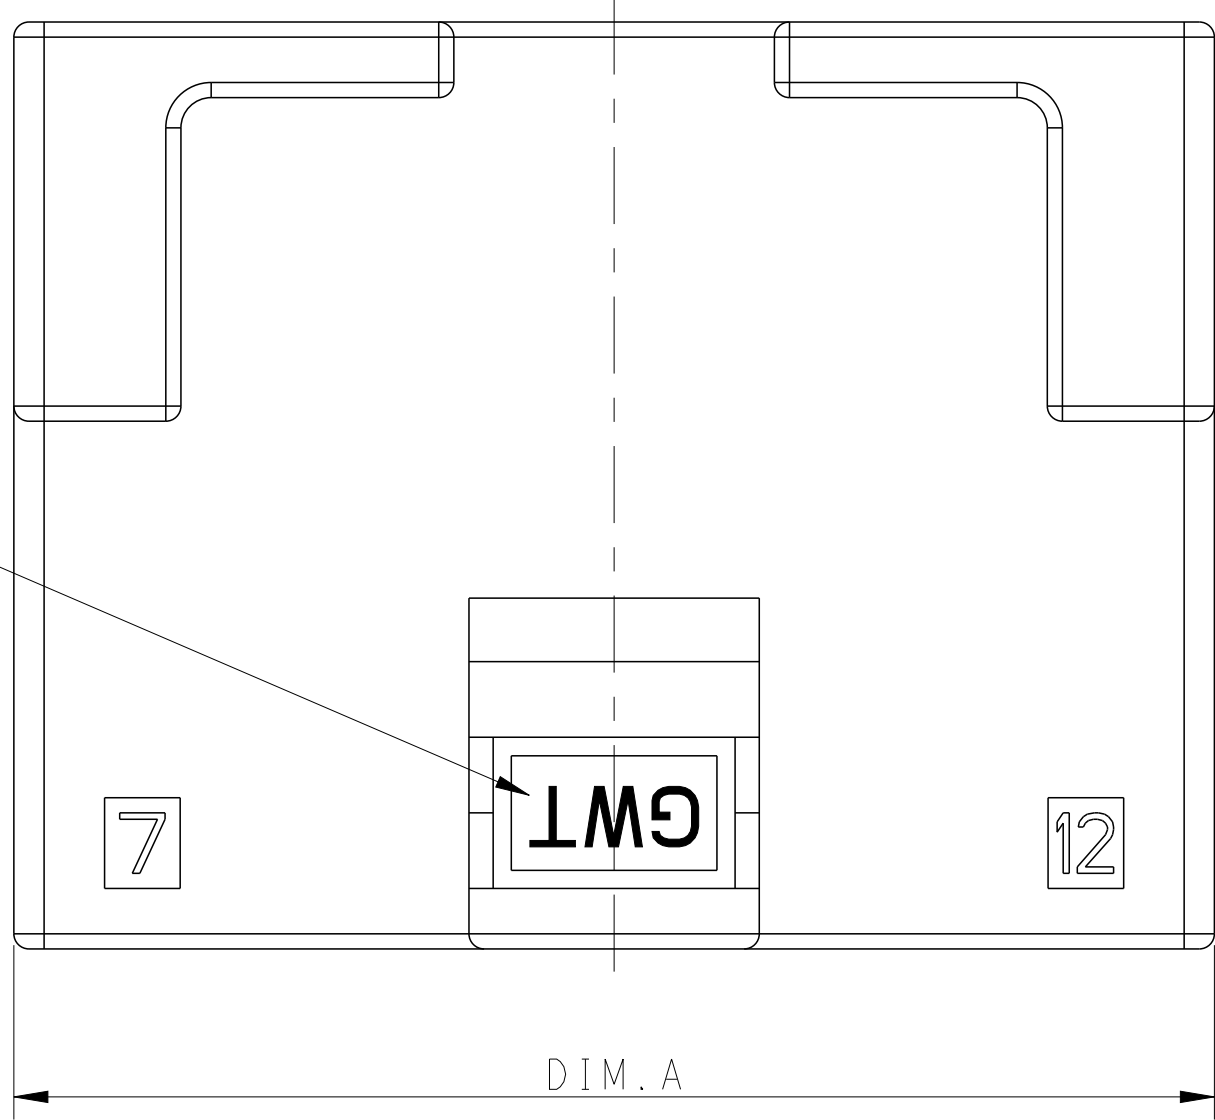
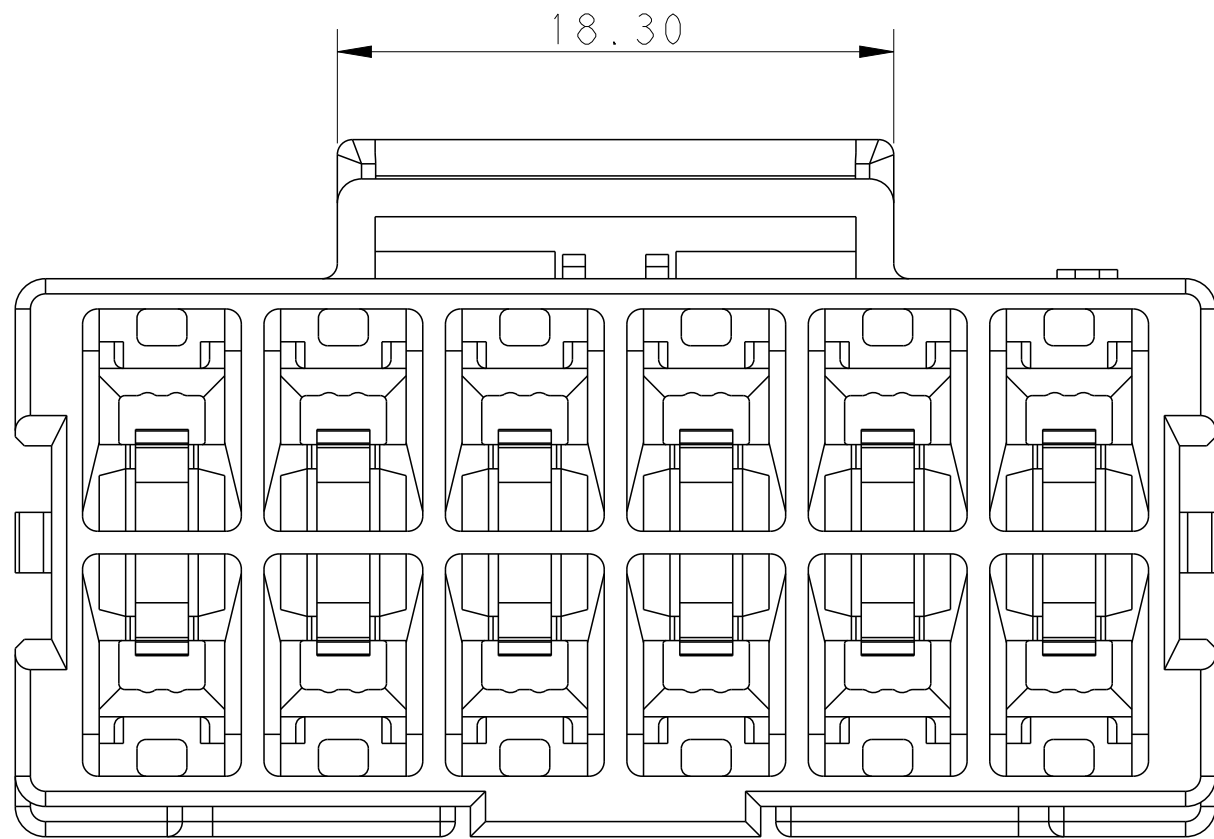


LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
		B			18JUL2016	BW	GJ	

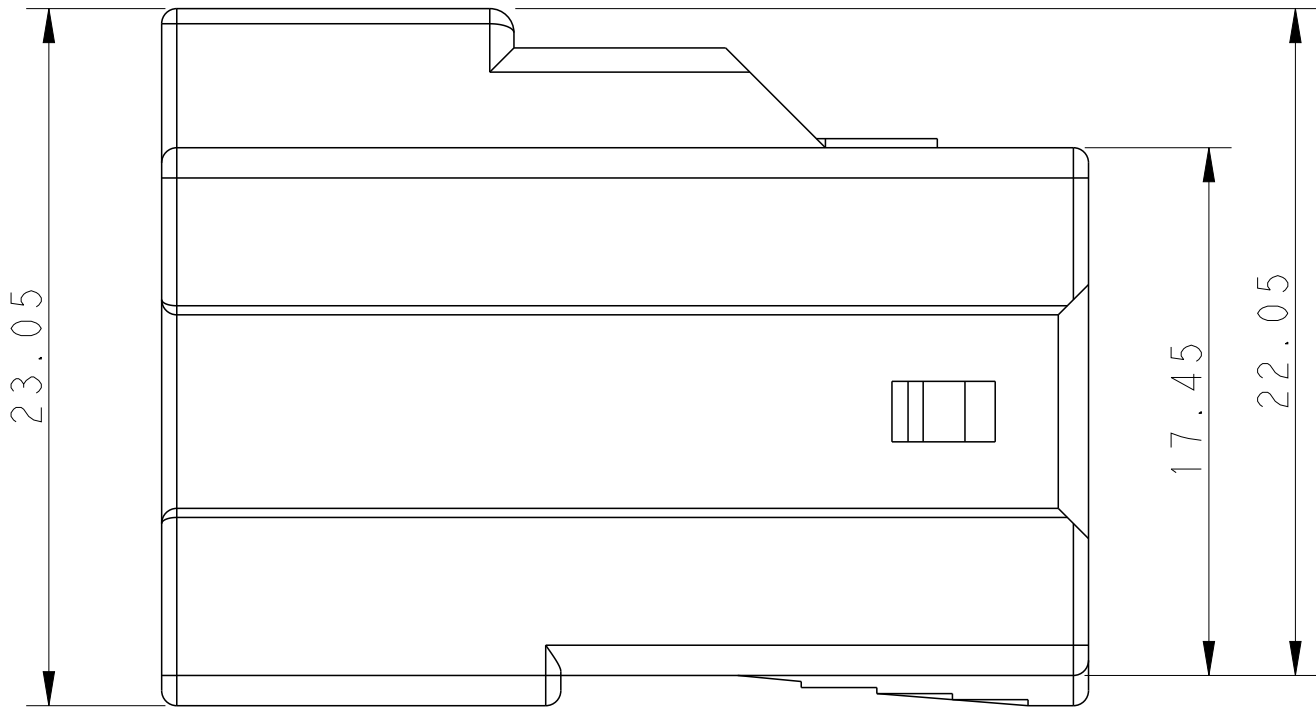

POS.	DIM. A	DIM. B
2*6	39.70	37.30
2*5	33.70	31.30
2*4	27.70	25.30
2*3	21.70	19.30

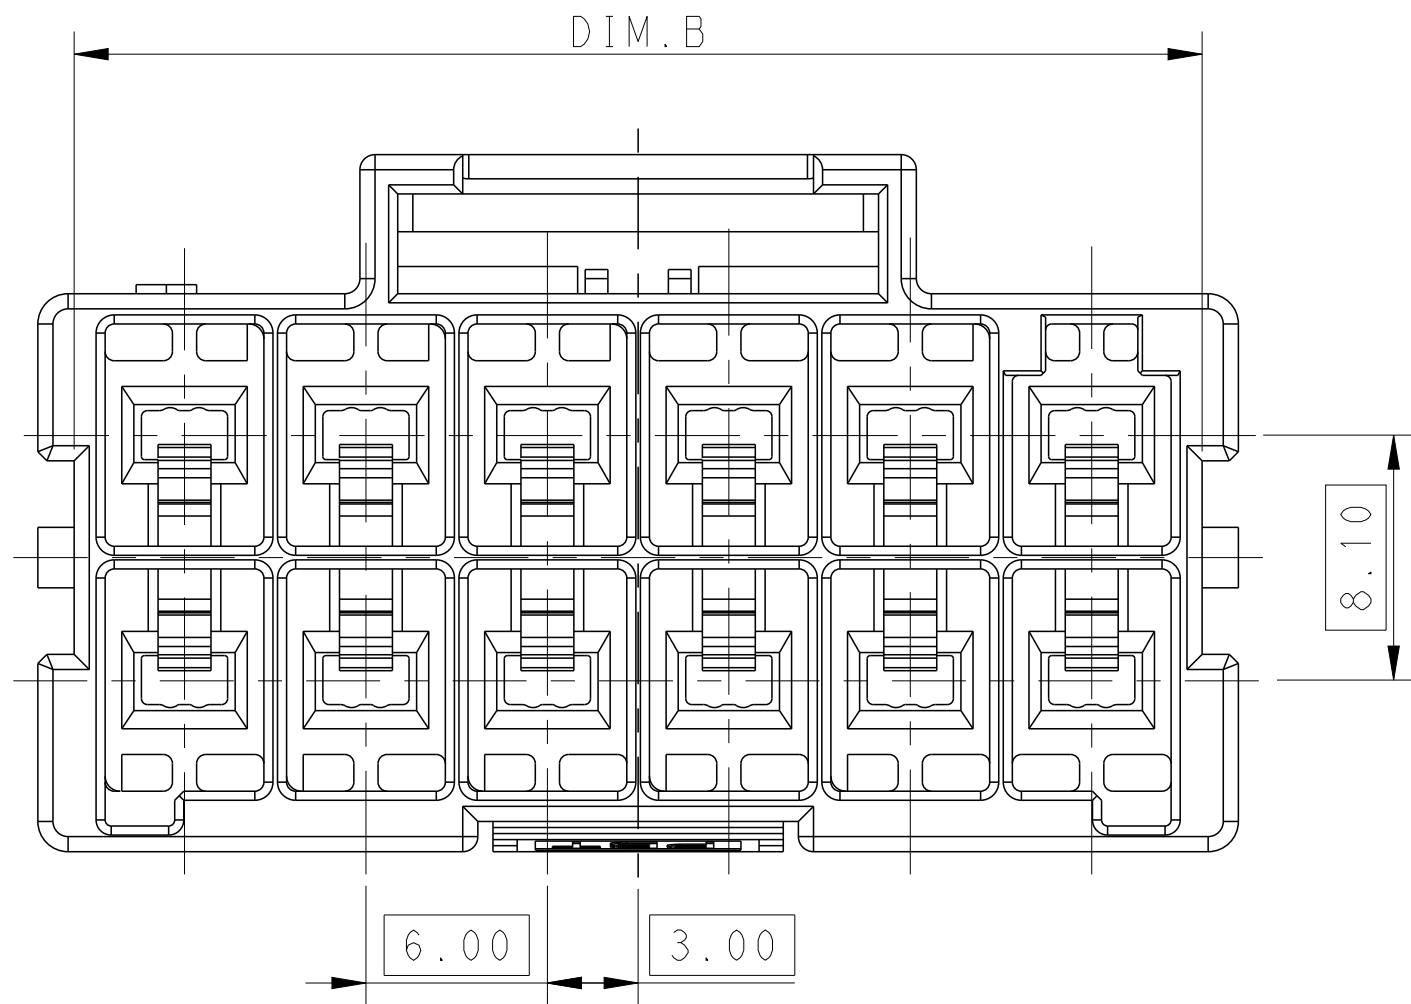

NOTE

1. MATERIAL:
- LEVEL A: PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
- LEVEL B: PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0




2. MATERIAL MARK:
- LEVEL A:GWT,LEVEL B:HWT

3. APPLICABLE CONTACT P/N
- TAB CONTACT:1971238/1971780/82/84/86/88-*,2238067-*


4. MATING CONN, P/N
- PLUG HSG: *-2232266-*
- TPA (LOCK PLATE): *-1971778-*

5. This product has not completed validation testing.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TOMMY WU	26MAR2013	TE Connectivity			
		CHK	HAPYE WU	26MAR2013				
DIMENSIONS:		APVD	YUHONG MAO	26MAR2013	NAME			
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:			CAP HOUSING,FREE HANGING,DOUBLE ROW POWER TRIPLE LOCK			
		0 PLC ± -			PRODUCT SPEC			
		1 PLC ±0.35			108-106118			
		2 PLC ±0.25			APPLICATION SPEC			
		3 PLC ± -			114-106118			
		4 PLC ± -			SIZE			
		ANGLES ± -			CAGE CODE			
		FINISH ± -			DRAWING NO			
MATERIAL		-			A100779C=2232359			
		-			RESTRICTED TO			
		Customer Drawing			SCALE			
					SHEET 1 OF 2			
					REV B			

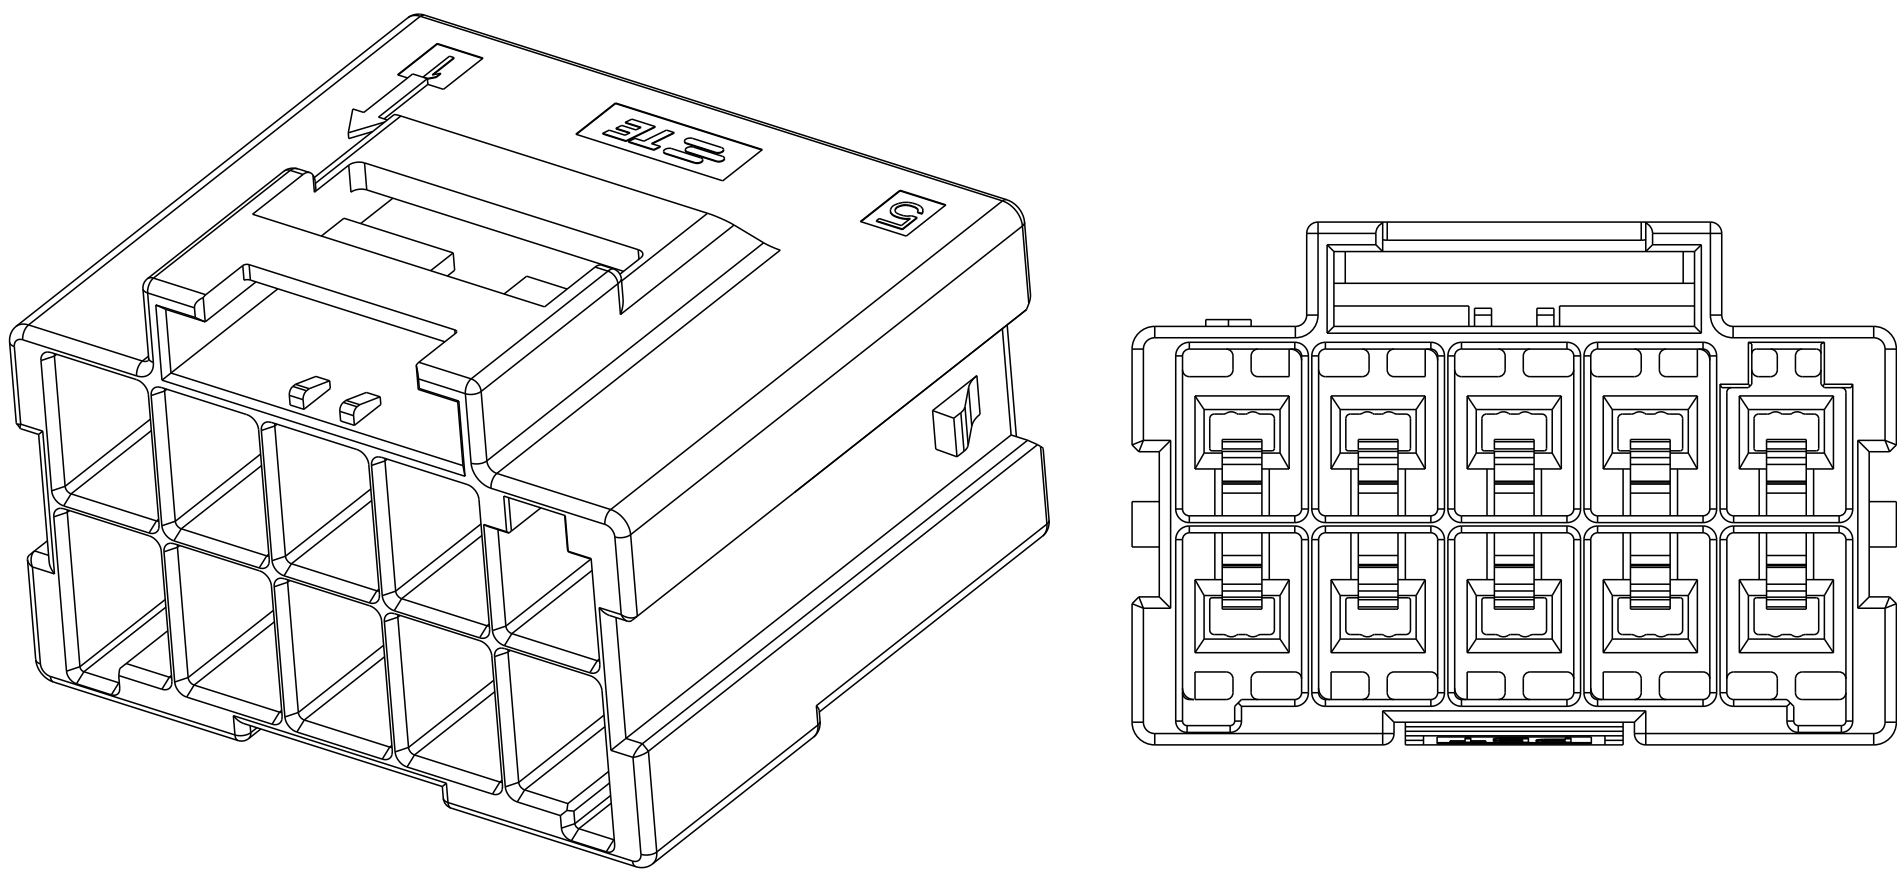


2*5 POSITIONS

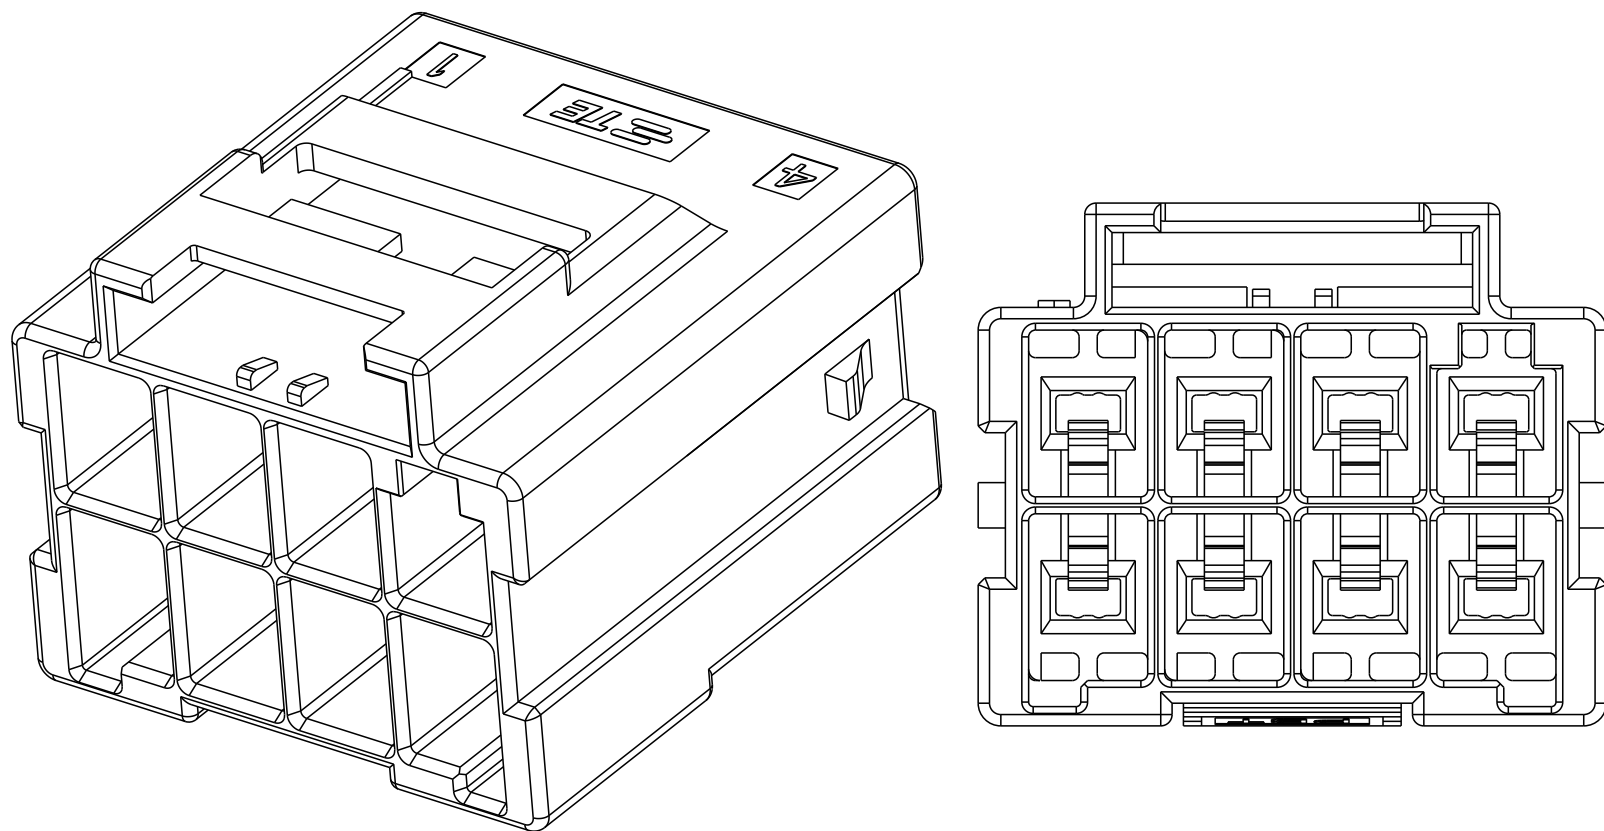


2*4 POSITIONS

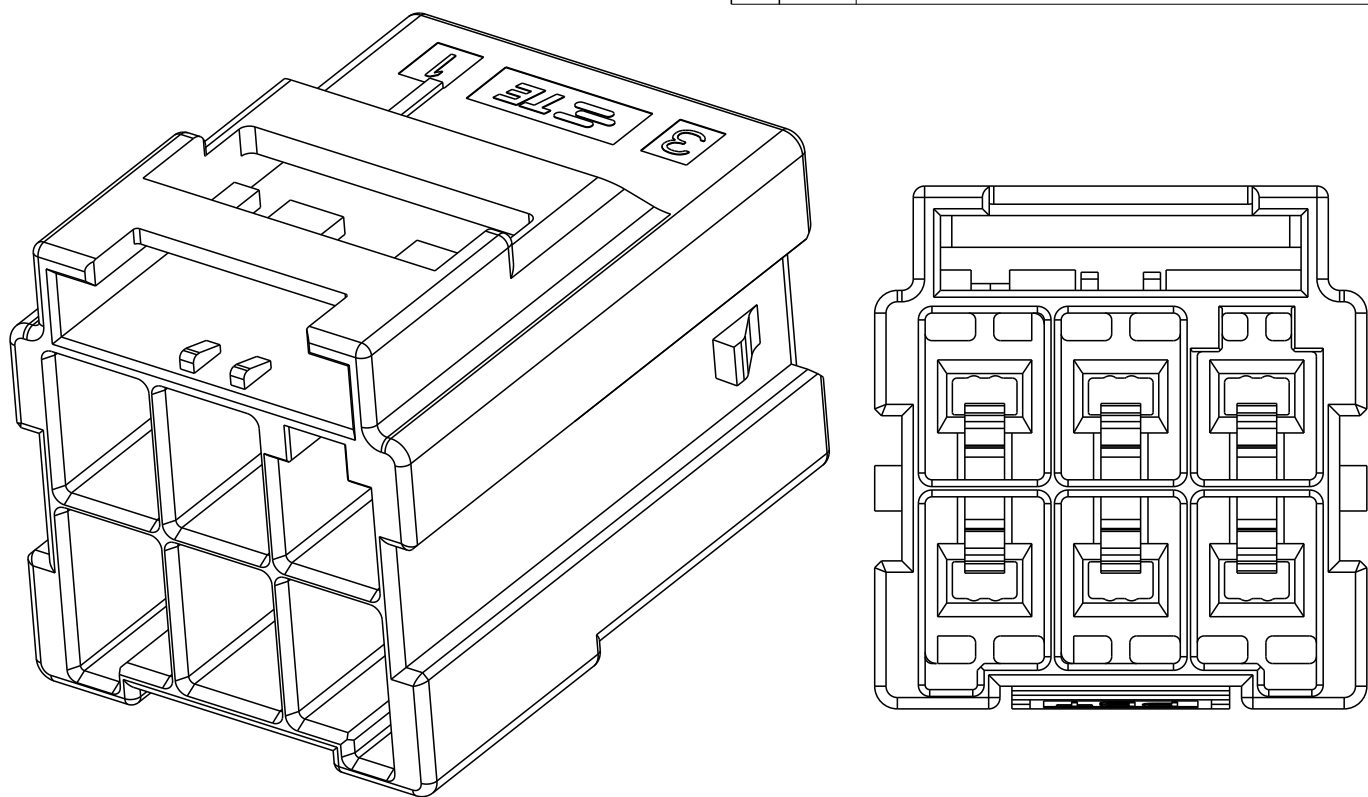


2*3 POSITIONS

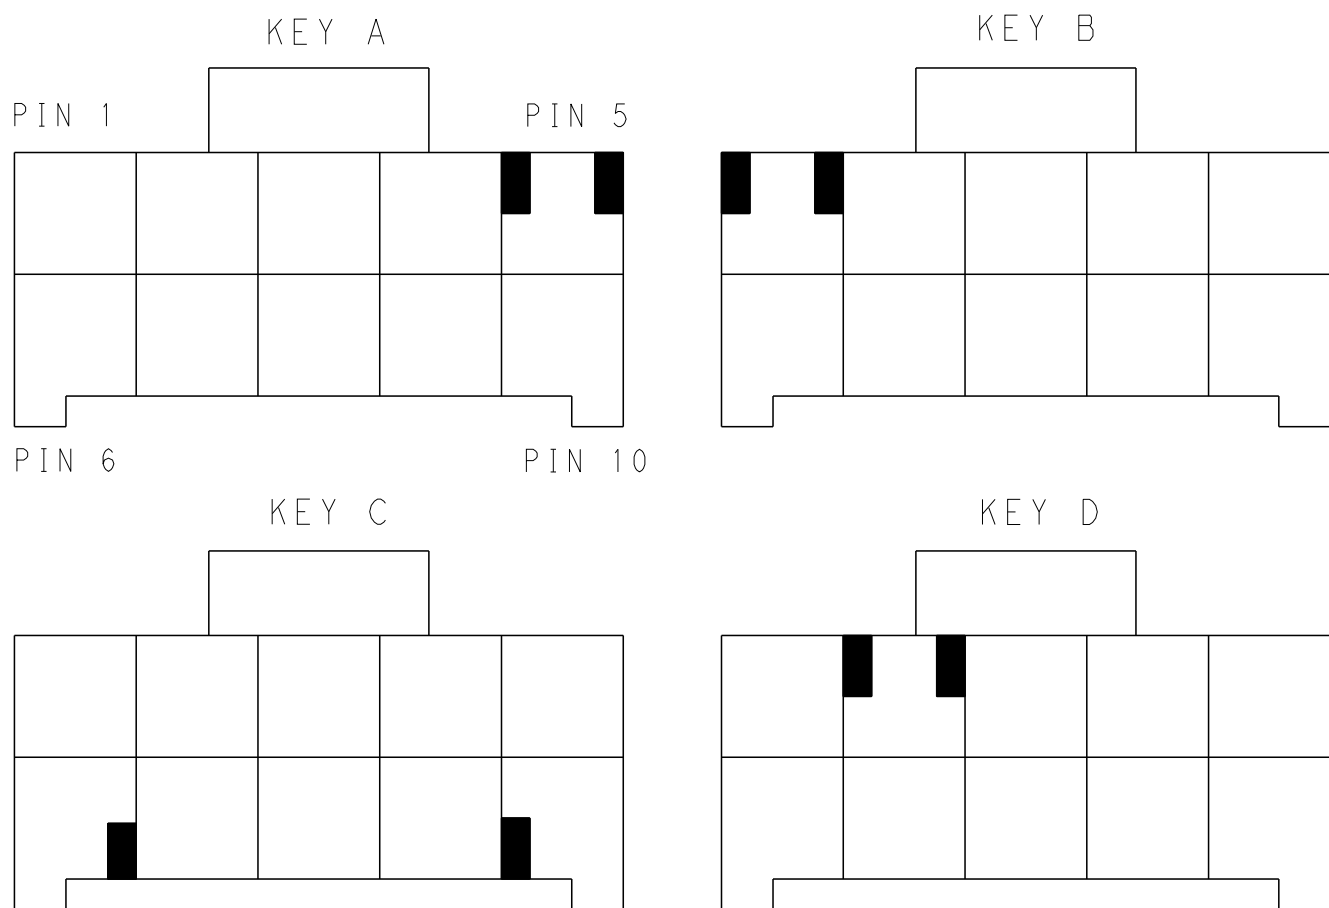


KEYING FOR 2*5 POS.

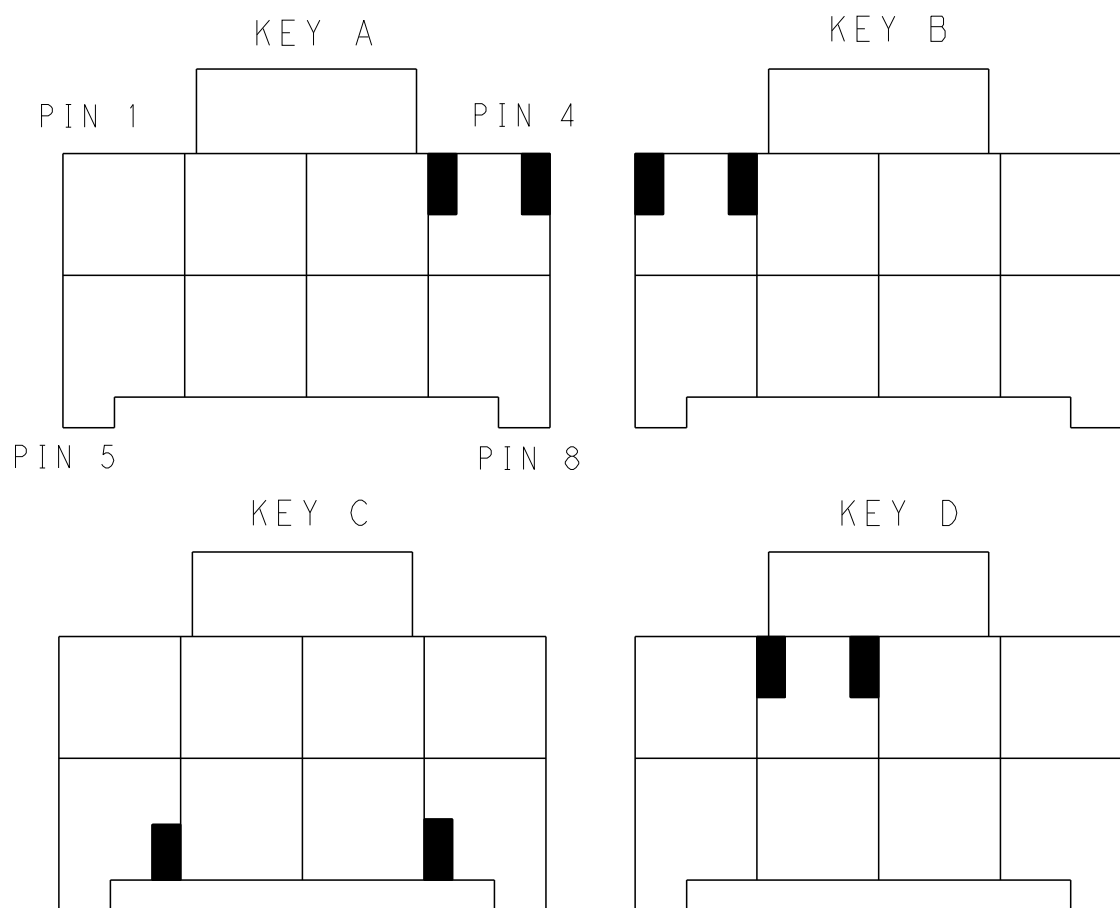


KEYING FOR 2*4 POS.

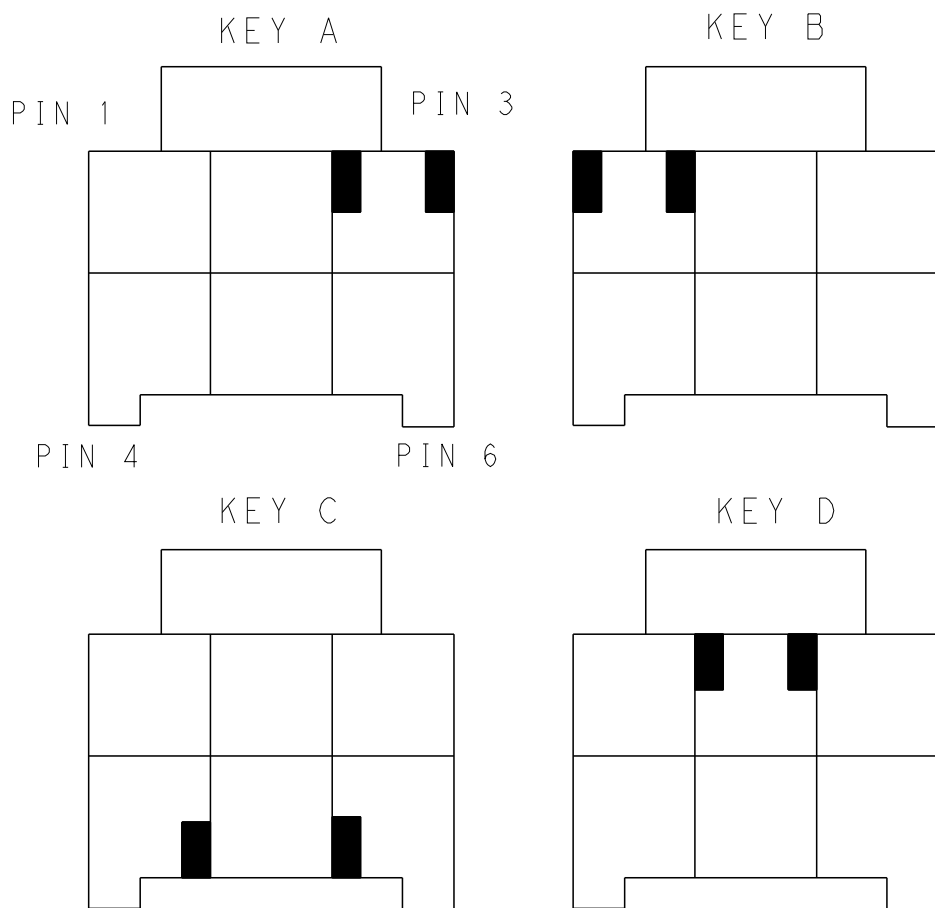

KEYING FOR 2*3 POS.

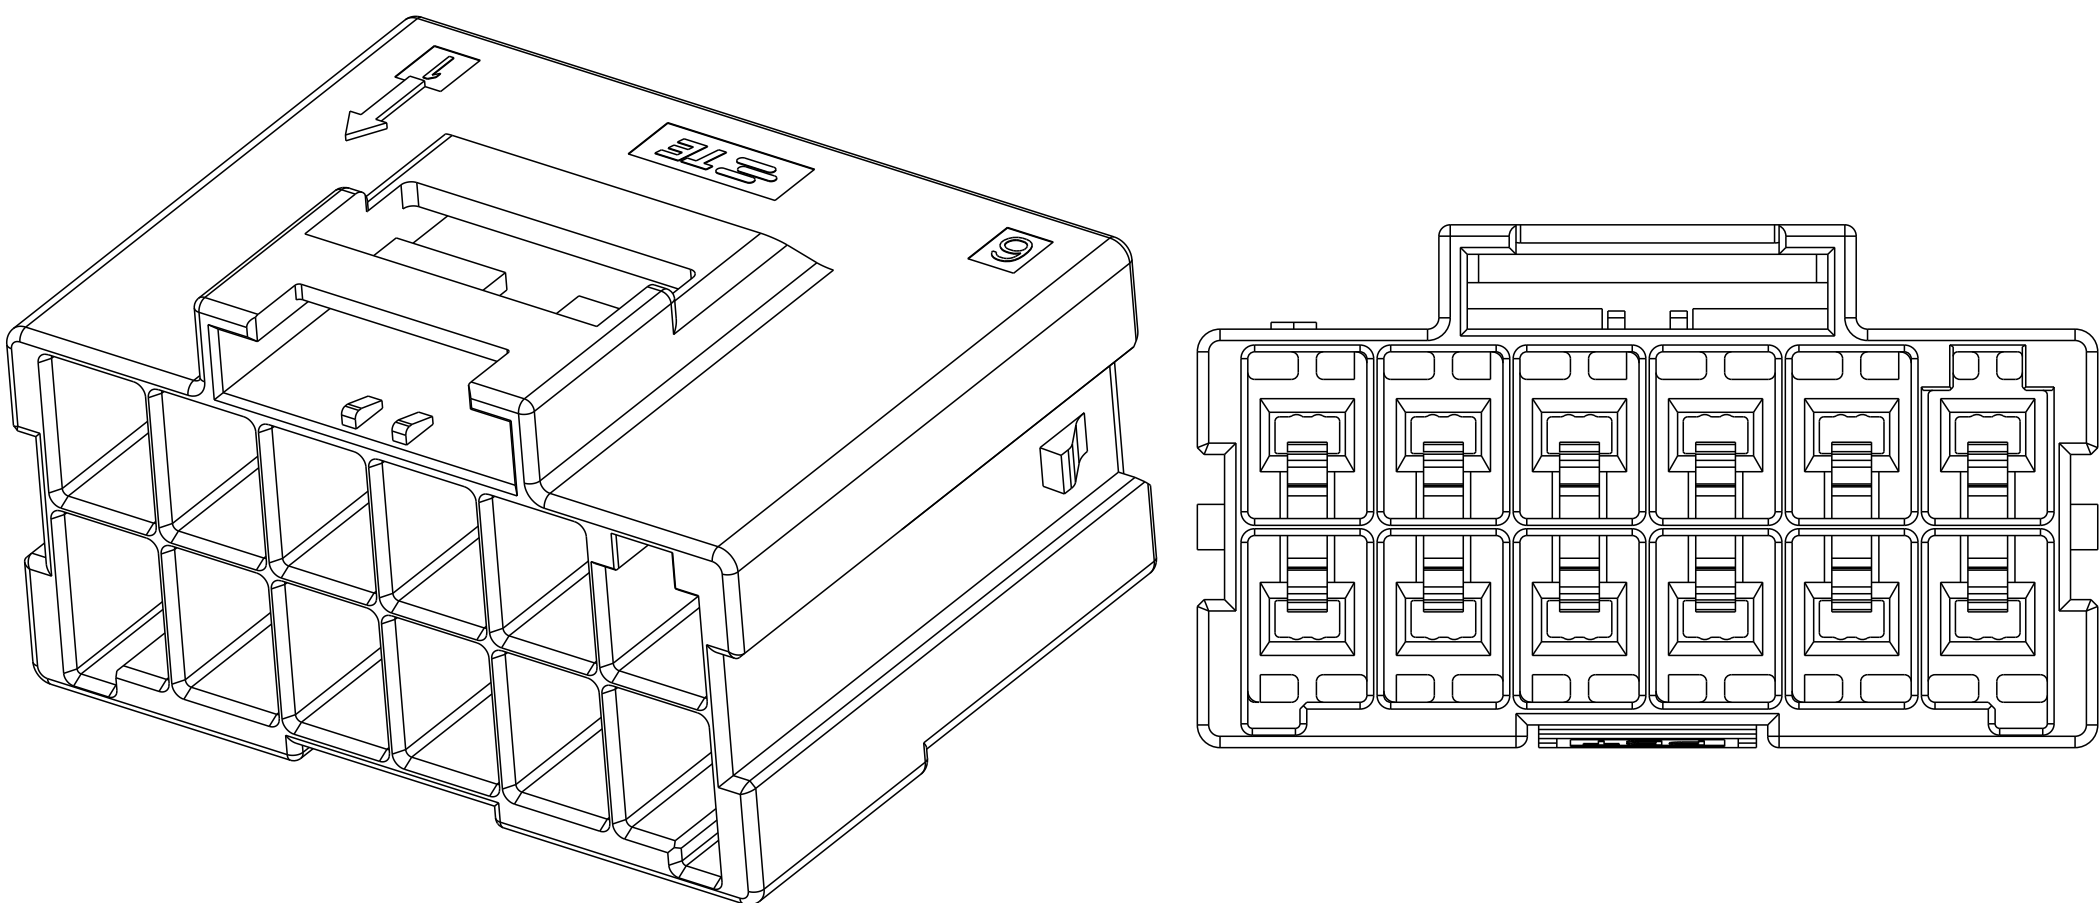

2*6 POSITIONS

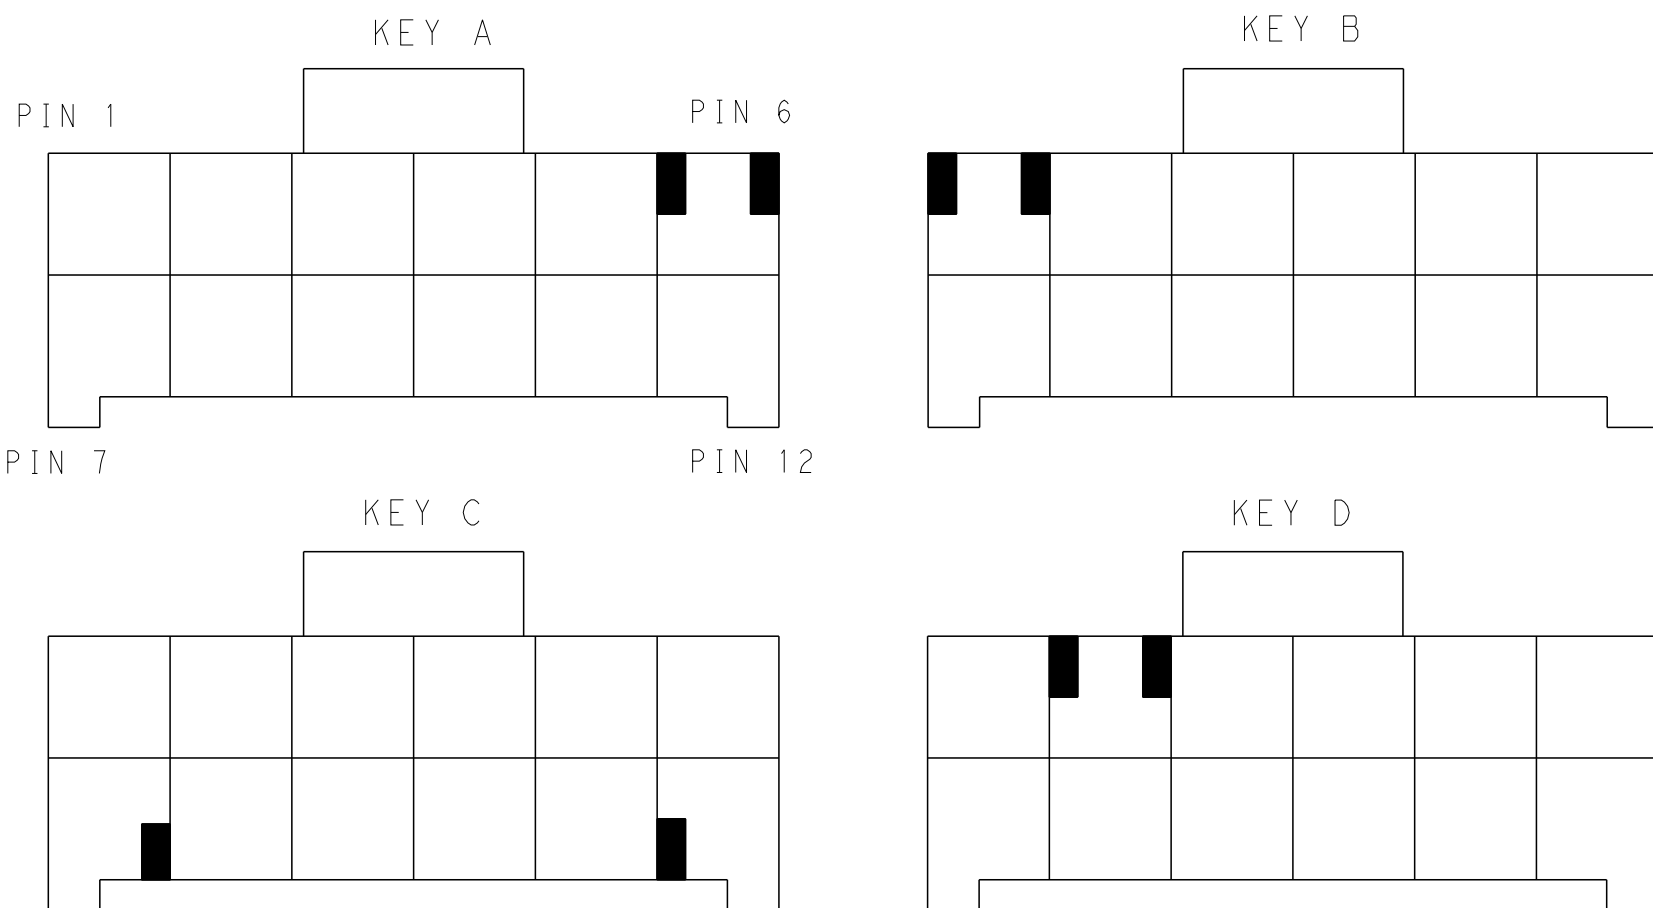

KEYING FOR 2*6 POS.

2*4	LEVEL A	DARK GREY	KEY A	5-2232359-4	2*6	LEVEL A	DARK GREY	KEY A	5-2232359-6
		BROWN	KEY B	6-2232359-4			BROWN	KEY B	6-2232359-6
		GREEN	KEY C	7-2232359-4			GREEN	KEY C	7-2232359-6
		ORANGE	KEY D	8-2232359-4			ORANGE	KEY D	8-2232359-6
2*3	LEVEL A	DARK GREY	KEY A	5-2232359-3	2*5	LEVEL A	DARK GREY	KEY A	5-2232359-5
		BROWN	KEY B	6-2232359-3			BROWN	KEY B	6-2232359-5
		GREEN	KEY C	7-2232359-3			GREEN	KEY C	7-2232359-5
		ORANGE	KEY D	8-2232359-3			ORANGE	KEY D	8-2232359-5
POS.	MATERIAL	COLOR	KEY	P/N	POS.	MATERIAL	COLOR	KEY	P/N
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN TOMMY WU 26MAR2013	TE Connectivity CAP HOUSING, FREE HANGING, DOUBLE ROW POWER TRIPLE LOCK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK HAPYE WU 26MAR2013					
DIMENSIONS:		mm			PRODUCT SPEC		NAME		
		0 PLC ±- 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH ±-			108-106118		A100779		
					APPLICATION SPEC		SIZE CAGE CODE DRAWING NO		
					114-106118		C=2232359		
MATERIAL		-			WEIGHT		-		
Customer Drawing				SCALE		SHEET 2 OF 2		REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[7-2232359-4](#)