

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.




SPC—F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			MRD	01-08-10	JAG	14-08-10	XXX	16-08-10

DOC. NO. SPC—F005 * Effective: 7/8/02 * DCP No: 1398

PCB Layout

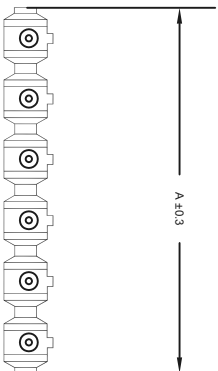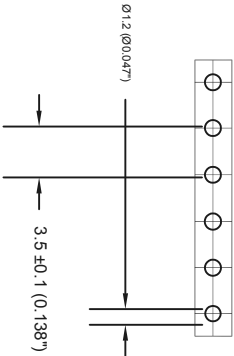

Specifications

Current rating : 15Amp AC300V
Operation temperature : -40°C to +105°C

Material	Plating/Finish	Remarks
1 Housing	Polyamide 66(UL94V-0)	Black
2 Solder pin	Brass	Tin plated

All materials are RoHS according
EU Standard

Pitch : 2.50mm (0.098inch)	Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
	2	7.0	0.276	15	52.5	2.067
	3	10.5	0.413	16	56.0	2.205
	4	14.0	0.551	17	59.5	2.343
	5	17.5	0.689	18	63.0	2.480
	6	21.0	0.827	19	66.5	2.618
	7	24.5	0.965	20	70.0	2.756
	8	28.0	1.102	21	73.5	2.894
	9	31.5	1.240	22	77.0	3.031
	10	35.0	1.378	23	80.5	3.169
	11	38.5	1.516	24	84.0	3.307
	12	42.0	1.654			
	13	45.5	1.791			
	14	49.0	1.929			

Dimensions : Inches (mm)

Part Number Table	Part Number
Description	MD023-35002
Pluggable Header	

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWING TITLE:

Pluggable Header

DRAWN BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
MRD	01-08-10	A	XXX	04R7014 MD023-350XX	
CHECKED BY:	DATE:	SCALE:	NTS	U.O.M.: Millimeters	SHEET: 1 OF 1
JAG	03-08-10				
APPROVED BY:	DATE:				
XXX	16-08-10				