
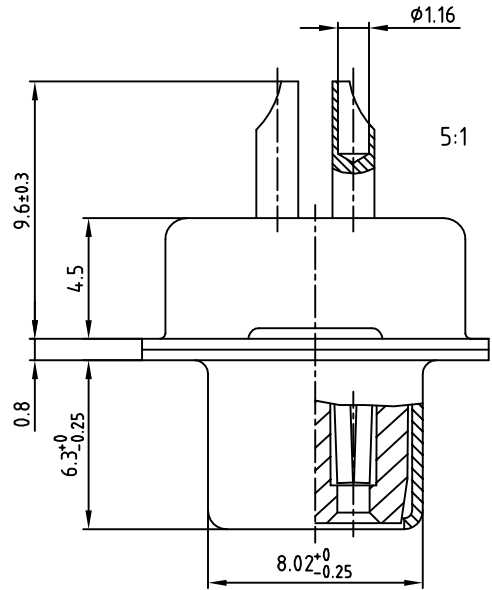

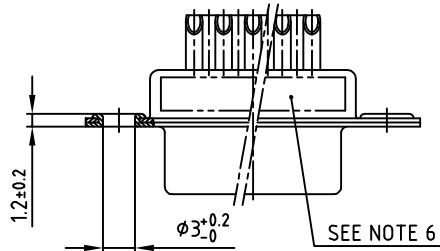


POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	25.00 $\begin{smallmatrix} +0.12 \\ -0.13 \end{smallmatrix}$	242A26860X
15	39.52	24.79	33.30 $\begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$	242A26870X
25	53.42	38.50	47.04 ± 0.13	242A26880X
37	69.70	54.96	63.50 ± 0.13	242A26890X

used for: D-SUB FILTER

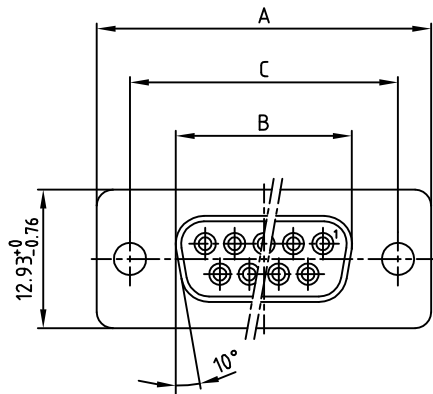

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
- CAPACITANCE: 1300pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

G:\Reis_Compliant_gross_0001.jpg

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		
2006	date	name
drawn	03.02.	Lehmenkühler
appd.	03.02.	Mickenbecker
norm	DIN 41652	
d-old		

scale: 2:1 (5:1)	
material: SEE NOTES	
title: D-SUB FILTER FEMALE 9-37pos. SOLDER CUP	
dwg no:	AutoCAD 2004
24K1A757	
part no:	SEE TABLE
DIN-A	3
sh: 1/1	

CONEC