
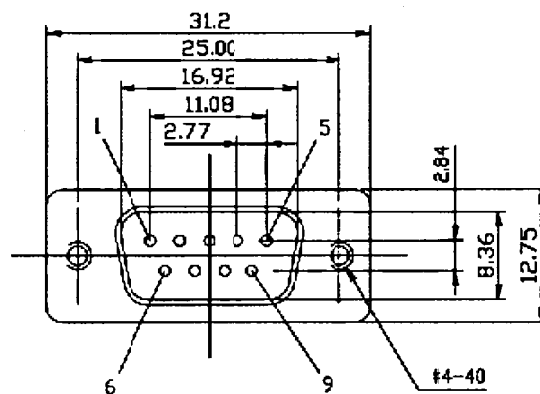
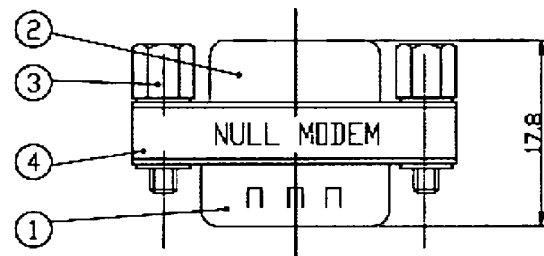


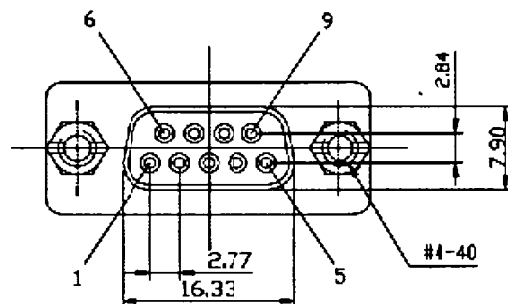

DB09P	DB09S
2	3
3	2
4	1,6
5	5
1,6	4
7	8
8	7
GND	GND

MECHANICAL

INSULATOR MATERIAL

PET & Glass-fibre reinforced
UL 94V-0

CONTACT

Brass

SHELL

Plated steel

FINISH

Contact: Gold flash

Shell: Tin

Sn: 100 μ "

Cu: 30 μ "

DURABILITY

100 cycles

ELECTRICAL

CURRENT RATING

5 Amp

DIELECTRIC WITHSTANDING VOLTAGE

AC 1000V Min. (for 1 minute)

INSULATION RESISTANCE

1000M Ω Min. (at 500V DC)

CONTACT RESISTANCE

25m Ω Max. mated

WORKING TEMPERATURE

-55°C to +105°C

4 Label, Yellow Color

3 #4-40 Hex Screw

2 D-SUB 9 Female

1 D-SUB 9 Male

No. DESCRIPTION

UNLESS OTHERWISE SPECIFIED
TOLERANCE:
X ± 0.2 ANGLES: $\pm 2^\circ$
XX ± 0.1
XXX ± 0.05 DO NOT SCALE DRAWING

DRAWN BY

Arhuan

CHECKED BY

Wu 7/2

APPROVED BY

Wu 7/2

DWG NO.

DEWX2001061901X0

TITLE

9 Way Null Modem Adaptor

UNIT

MM

PART NO.

243-0374

SCALE

1 : 1

THIRD ANGLE PROJECTION

PAGE

1

OF

1

DATE

06/19/2001

ITEM NO. MGCD09F/D09M/07-02E