


ST 18/3poles Male parts



black/white green

coding



ST 18/3


single screw connector
strain relief for two round cables
diameter 4.5–10.0 mm
or one flat cable

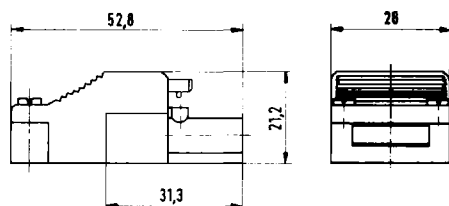

female part assembled
with strain relief without locking device

black	93.631.3253.0	100
white	93.631.3250.0	100
green/black ¹⁾	93.631.3750.0	100



single screw connector
strain relief for one round cable
diameter 6.5–8.3 mm

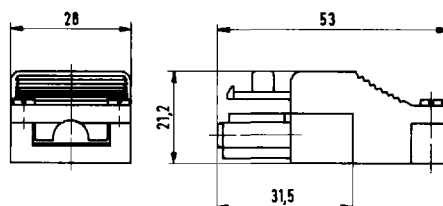

male part assembled
with strain relief without locking device

black	93.732.3353.0	100
white	93.732.3350.0	100
green/black ¹⁾	93.732.3750.0	100

single screw connector
strain relief for two round cables
diameter 4.5–10.0 mm
or one flat cable

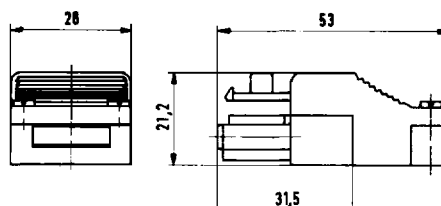

male part assembled
with strain relief without locking device

black	93.632.3353.0	100
white	93.632.3350.0	100
green/black ¹⁾	93.632.3750.0	100

female part assembled
with strain relief with locking device

black	93.631.4253.0	100
white	93.631.4250.0	100
green/black ¹⁾	93.631.4750.0	100

male part assembled
with strain relief with locking device

black	93.732.4353.0	100
white	93.732.4350.0	100
green/black ¹⁾	93.732.4750.0	100

male part assembled
with strain relief with locking device

black	93.632.4353.0	100
white	93.632.4350.0	100
green/black ¹⁾	93.632.4750.0	100

female part unassembled
with strain relief without locking device

black	93.831.3253.0	200
white	93.831.3250.0	200
green/black ¹⁾	93.831.3750.0	200

male part unassembled
with strain relief without locking device

black	93.932.3353.0	200
white	93.932.3250.0	200
green/black ¹⁾	93.932.3750.0	200

male part unassembled
with strain relief without locking device

black	93.832.3353.0	200
white	93.832.3350.0	200
green/black ¹⁾	93.832.3750.0	200

female part unassembled
with strain relief with locking device

black	93.831.4253.0	200
white	93.831.4250.0	200
green/black ¹⁾	93.831.4750.0	200


male part unassembled
with strain relief with locking device

black	93.932.4353.0	200
white	93.932.4350.0	200
green/black ¹⁾	93.932.4750.0	200

male part unassembled
with strain relief with locking device

black	93.832.4353.0	200
white	93.832.4350.0	200
green/black ¹⁾	93.832.4750.0	200


¹⁾ female part green, strain relief black
(attention: watch coding!)

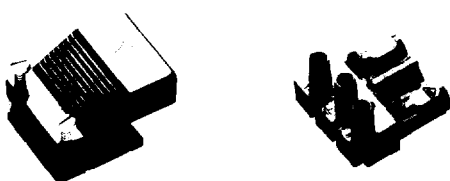

female part

black	93.031.3253.0	200
white	93.031.3250.0	200
green	93.031.3750.0	200


¹⁾ male part green, strain relief black
(attention: watch coding!)

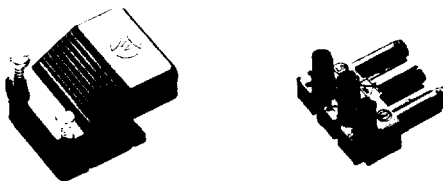

male part

black	93.032.3353.0	200	10,2
white	93.032.3350.0	200	11,0
green	93.032.3750.0	200	10,9

¹⁾ male part green, strain relief black
(attention: watch coding!)

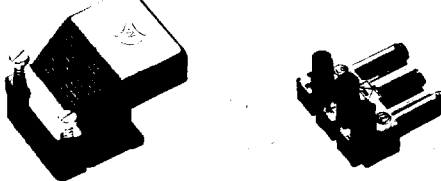

male part

black	93.032.3353.0	200
white	93.032.3350.0	200
green	93.032.3750.0	200

strain relief complete with top and bottom part
without locking device

black	Z7.410.5153.0	200
white	Z7.410.5150.0	200

strain relief complete with top and bottom part
without locking device

black	Z7.410.8153.0	200	6,9
white	Z7.410.8150.0	200	7,4

strain relief complete with top and bottom part
without locking device

black	Z7.410.5153.0	200
white	Z7.410.5150.0	200

strain relief complete with top and bottom part
with locking device

black	Z7.410.5553.0	200
white	Z7.410.5550.0	200

strain relief complete with top and bottom part
with locking device

black	Z7.410.8353.0	200	7,6
white	Z7.410.8350.0	200	7,3

strain relief complete with top and bottom part
with locking device

black	Z7.410.5353.0	200
white	Z7.410.5350.0	200