


REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
2000	A	Released	JN	01/14/09	JWM	01/14/09	JWM	01/14/09


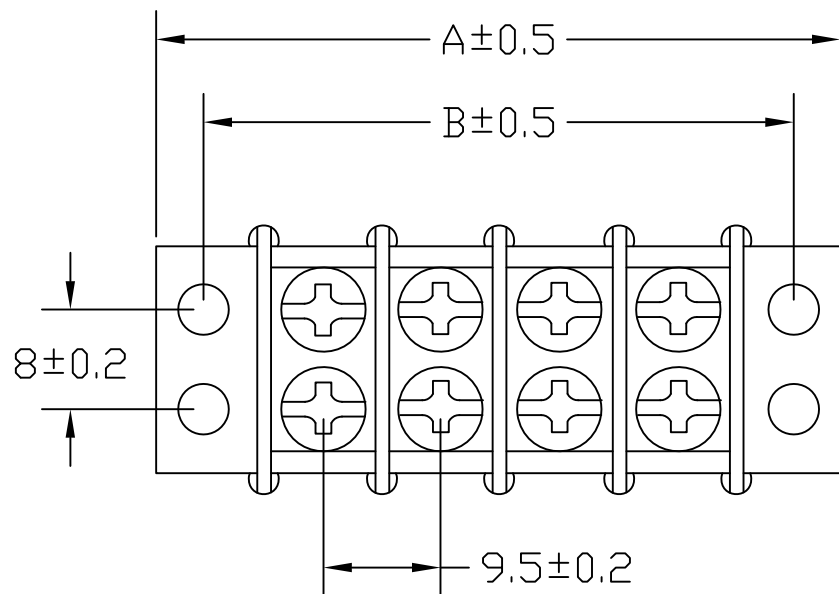


Description:

- Current Rating: 20Amp AC300V
- Insulation withstands Volt: AC200V min.
- Insulation resistance: >2000MΩ DC500V
- Operating temperature: -40°C to +105°C
- Wire range: 12~22 AWG
- Screw torque: 12 lb-inch
- Pitch: 9.50mm (0.374 inches)



Item	Material	Plating/Finish
1	Insulating Body, PC	Black
2	Terminal, Brass	Tin Plated
3	Screw, Steel	Ni Plated

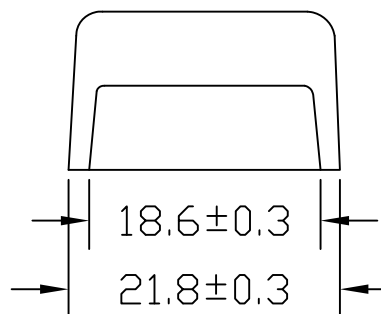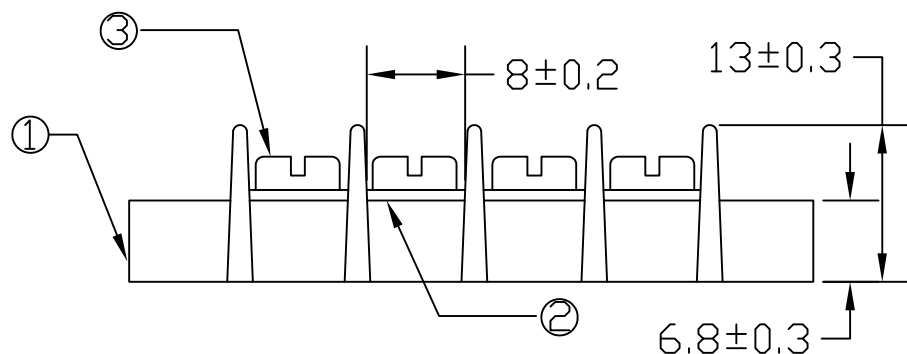

Mfg. p/n	Number of Poles	A (mm)	B (mm)
MC24299	2	36.20	29.00
MC24300	3	45.70	38.50
MC24302	5	64.70	57.50
MC24303	6	74.20	67.00
MC24304	8	93.20	86.00
MC24305	10	112.20	105.00
MC24307	16	169.20	162.00
MC24308	20	207.20	200.00

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

Jason Nash

CHECKED BY:

JWM

APPROVED BY:

JWM

DATE:

01/14/09

DATE:

01/14/09

DATE:

01/14/09

DRAWING TITLE:

TERMINAL BLOCK

SIZE DWG. NO.

A

Ta-1140

ELECTRONIC FILE

Ta-1140.DWG

REV

A

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1