



REV	DOCUMENT	CHANGED BY	CHECK
A	0004735	RS 19APR04	AK

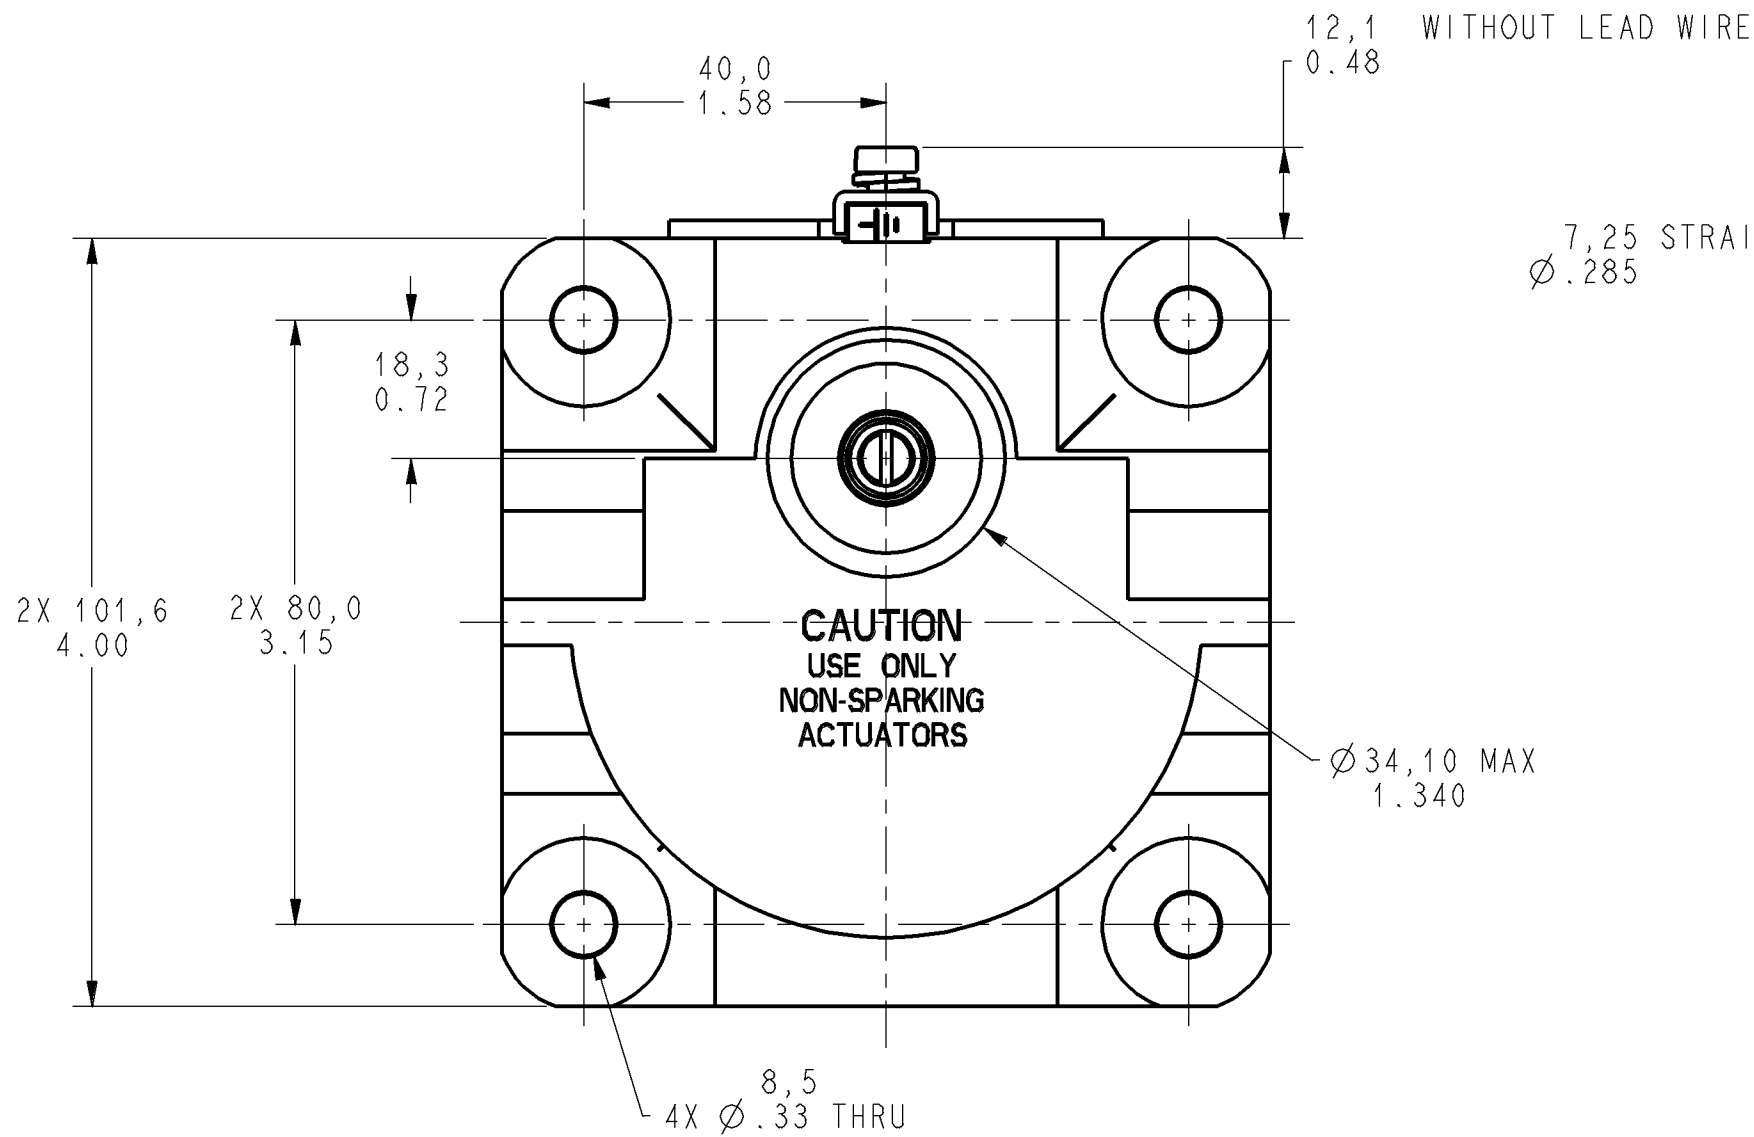

7,25 STRAIGHT KNURL
Ø .285

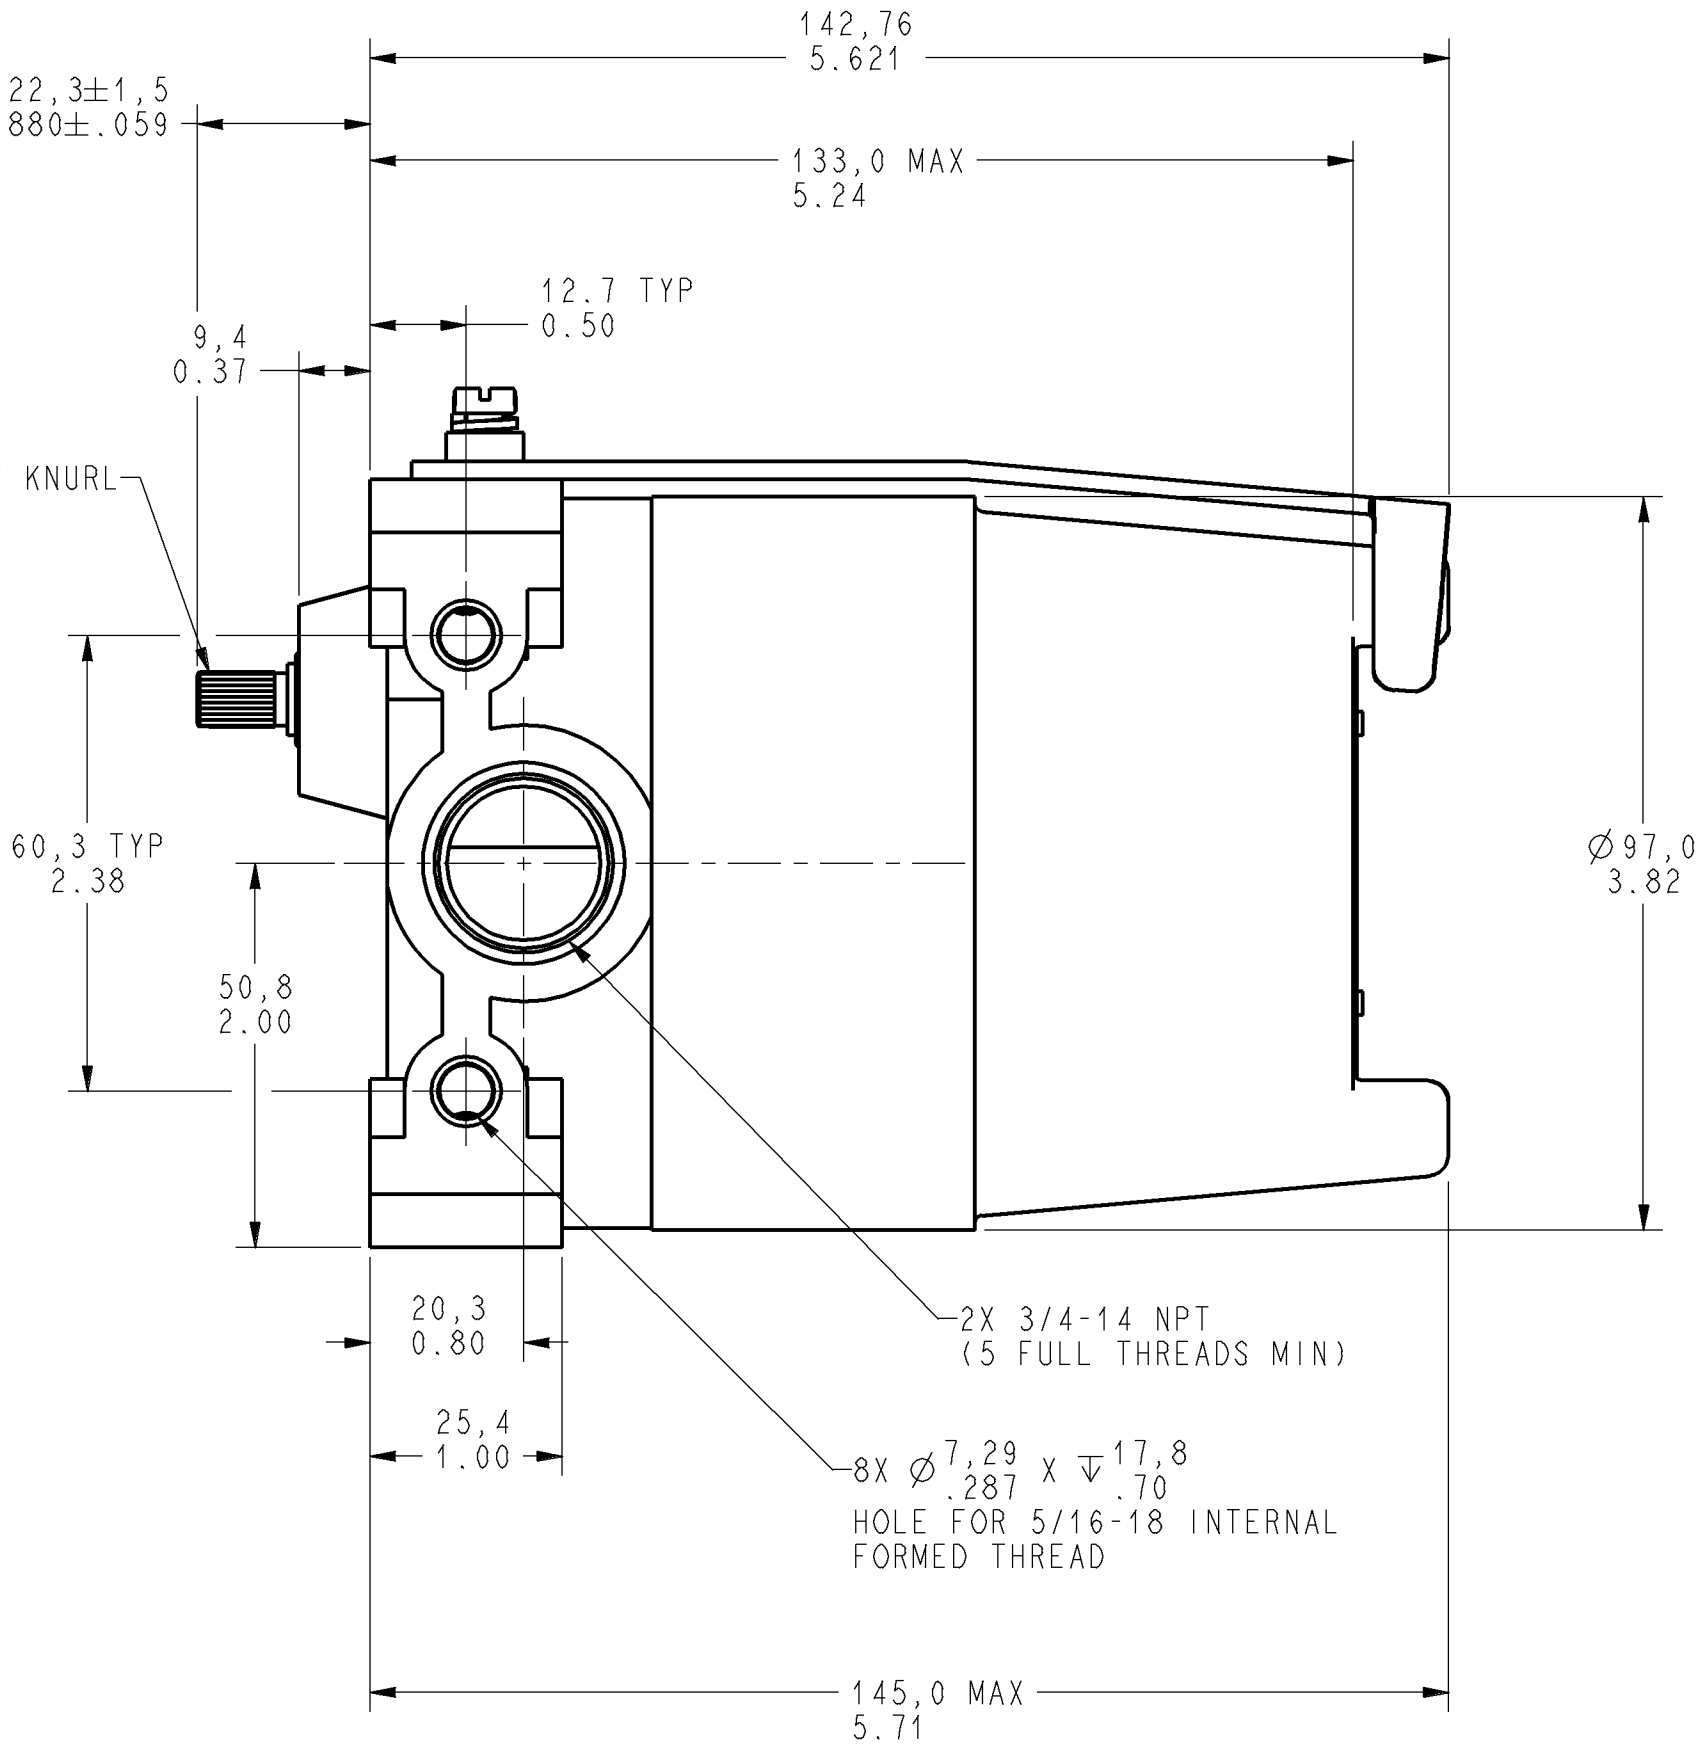

NOTES

- 1 - EXPLOSION PROOF - UNDERWRITERS LAB INC LISTING FOR HAZARDOUS LOCATIONS CLASS 1, GROUPS B, C AND D; CLASS 2 GROUPS E, F AND G
- 2 - EUROPEAN HAZARDOUS LOCATIONS DESIGNATION: EExd IIC T6 CATEGORY II 2 GD
- 3 - ALUMINUM ENCLOSURE FINISHED WITH BLUE AND BLACK EPOXY PAINT
- 4 - 6-32 UNC X (4,75) (.187) PAN HEAD TERMINAL SCREW, (6 PER BASIC)
- 5 - CAMS MAY BE REPOSITIONED IN 7°20' INCREMENTS
- 6 - 2 BASICS; EACH OPERATES CLOCKWISE AND COUNTER CLOCKWISE
- 7 - FOR USE IN TEMPERATURES UP TO 85°C
- 8 - SEE 7CX CHARTS 1 AND 2 (1 DRAWING) FOR LEVER ACTUATORS
- 9 - WEIGHT: 2.75 LB (1,25 Kg) APPROX

CHARACTERISTICS	ELECTRICAL DATA
OPERATING TORQUE----- .92 LB FT (1,25 Nm) MAX	CONTACT ARRANGEMENT
RELEASE TORQUE----- .083 LB FT (0,113 Nm) MIN	D P D T (EACH BASIC)
PRETRAVEL----- 30° MAX	L59
DIFFERENTIAL TRAVEL----- 25° MAX	10A-125 OR 250 VAC
OVERTRAVEL-----75° MIN	0.3A-125 VDC; 0.15A-250 VDC



UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	☒ US (inch) CUSTOMARY	☐ SI (mm) METRIC
NO PLACE	X	±.040 ±1
ONE PLACE	.X	±.030 ±0,4
TWO PLACE	.XX	±.015 ±0,15
THREE PLACE	.XXX	±.005 ±
ANGLES		±
RAW MATERIAL-COMMERCIAL STANDARD		
THIRD ANGLE PROJECTION		



DRAWN	RS	19APR04
CHECK	AK	19APR04
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		
ASME Y14.5M-1994		

Honeywell			
TITLE			
SWITCH, ENCLOSED			
SIZE	DWG TYPE	DRAWING NAME	REV
C	I	24CX2E	A
SCALE	FULL	WEIGHT	SHEET
		9	1 OF 1