


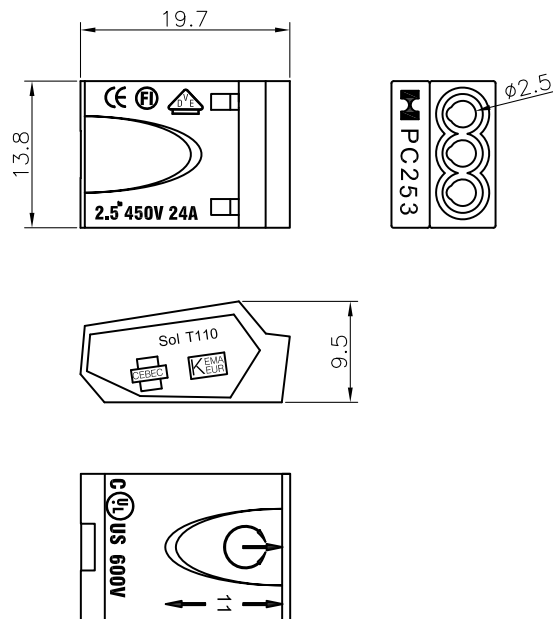

ALL DIMENSION IN MM UNLESS OTHERWISE STATED : 0.= ±0.1mm 00.= ±0.2mm 000.= ±0.3mm

HEAVY POWER CO., LTD. <i>A Specialist Manufacturer</i> No.7, Lane 106, Wukung 3rd. Road, New Taipei Industrial Park, New Taipei City, Taiwan 248, R.O.C. Tel : 886-2-22983178 Fax : 886-2-22983183	Scale :	Date : 2012. 04. 24	TITLE : PUSH-IN WIRE CONNECTORS PART NO. PC253X-CL	
	Housing Material : Polycarbonate (PC), flame-retardant to UL 94V-2 Current : 30A(cULus), 24A(VDE) Voltage : 600V(cULus), 450V(VDE) Working Temp : 110°C Wire Range : 1.0~2.5mm ² , #12-#22 AWG, Sol Cu Stripping Length : 11mm (0.43inch) International Approvals cULus : E-113650 CE, VDE, FIMKO, KEMA, CEBEC	PREPARED <i>yao</i>	REV. 1.0	

DWG NO. PC253X-CL