


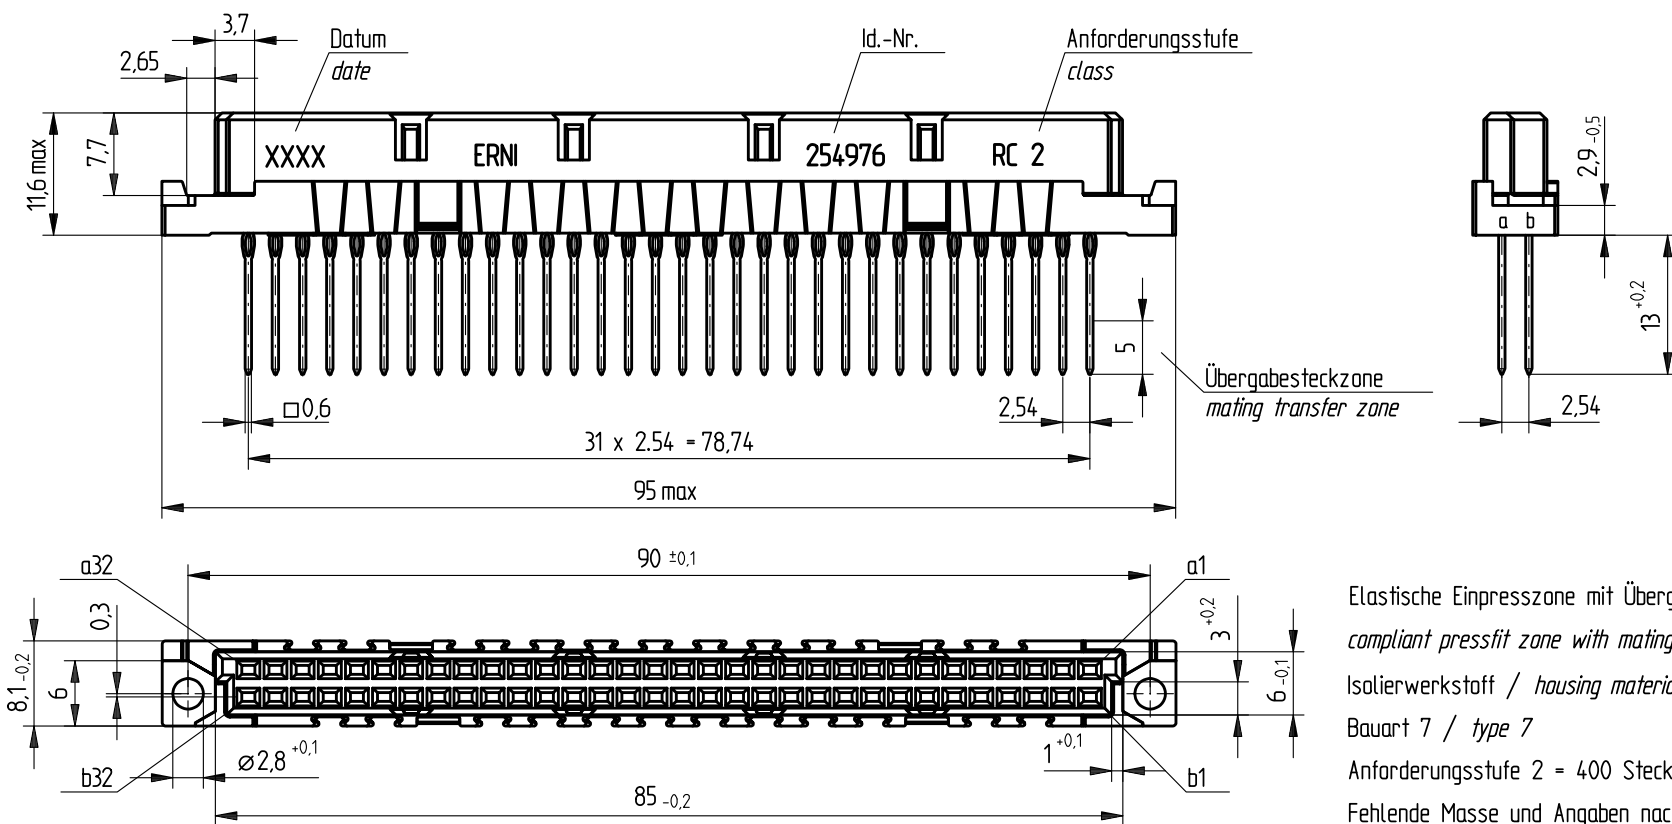

Elastische Einpresszone mit Übergabesteckzone /
compliant pressfit zone with mating transfer zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2


Schichtaufbau im metallisierten Loch siehe Zeichnung 164062/Nr.6

diameter of drilled hole see drawing 164062/Na.6

1) $\phi 1,0 \pm 0,09$ Durchmesser des metallisierten Loches


$\phi 1,0 \pm 0,09$ Diameter of finished plated-through hole

Bestückungsplan / contact layout

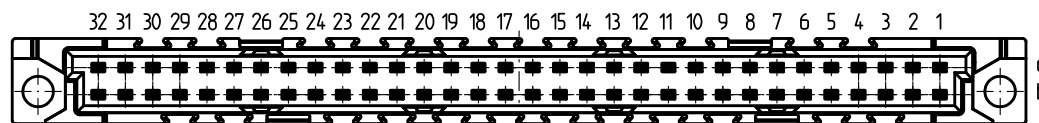

■ bestückt / assemble

Leiterplatten-Lochbild / PCB drillhole pattern

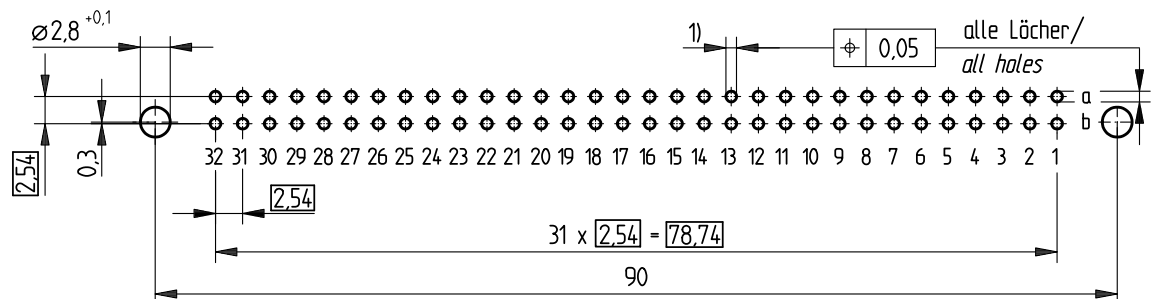

Information:	Tolerances	 All Dimensions in mm	Scale	2:1
	All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation	Federleiste B 64 EE Fem. Connector B 64 Pressfit
Consider protection memo from DIN 34	 www.ERNI.com		254976	I
Index	Date	H:00063810.SZA	STVB	