


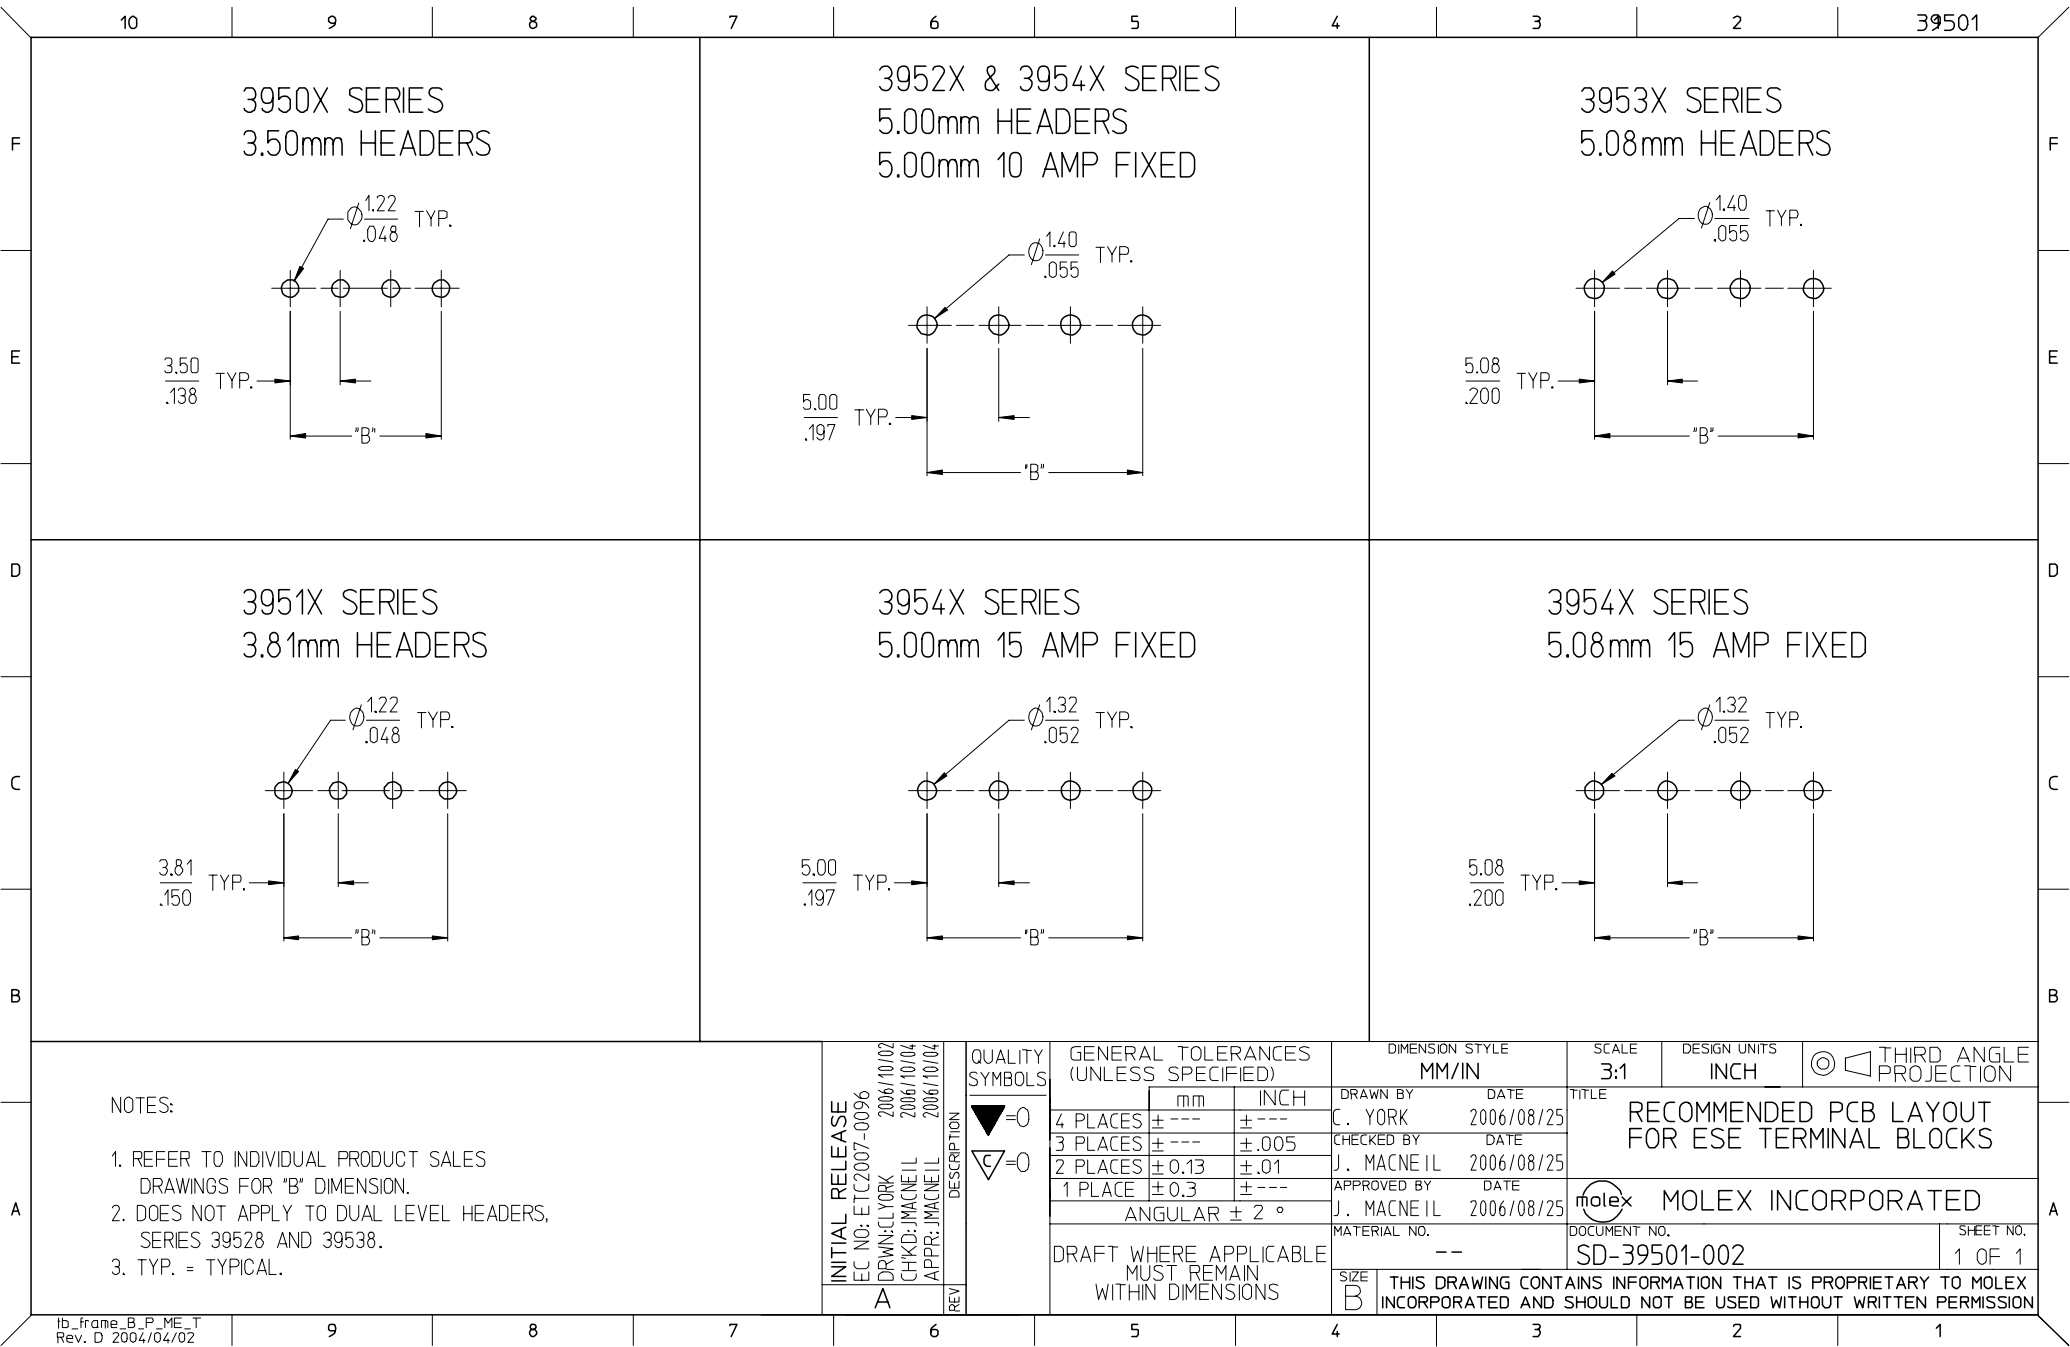

SPECIFICATIONS:

1. Material:

- (1). Body: PA66
- (2). Pin: Brass
- (3). Threaded insert: Brass

2. Wire range: N/A

3. Electrical rating: 300V, 15A.

4. Wire strip length: N/A

5. Operating temperature: -40C to +105C.

6. Max torque: N/A

7. Insulation resistance: DC 500V, 500M.

8. Dielectric withstand: AC 2500V for 1 minute.

9. Breakdown voltage: 4000V.


10. A = (B + 15.0mm)

11. B = (N - 1) x P

13. C = (B + 10mm)

12. P (PITCH) = 5.0mm (.197").

13. N = Number of positions available 2 through 24.

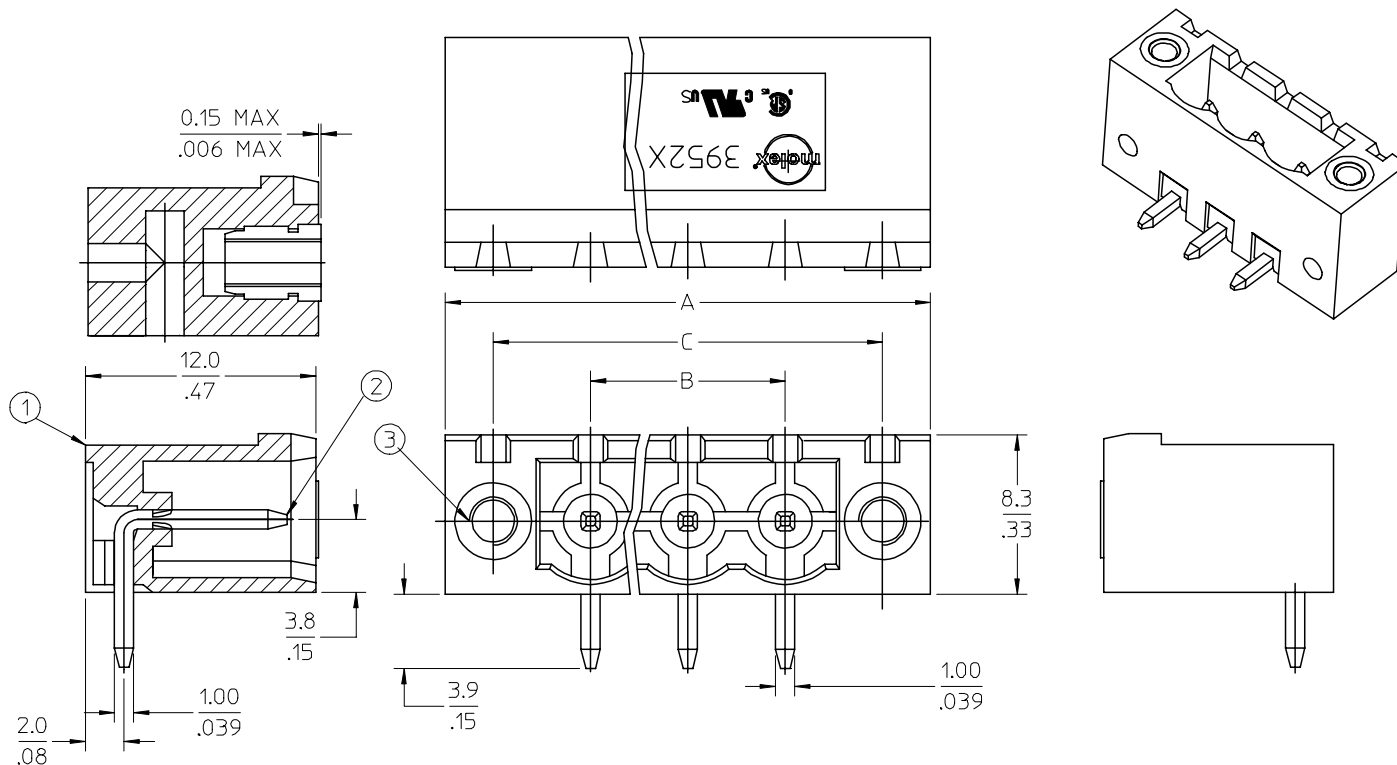

ENTER DESCRIPTION EC NO: NEO2006-0310 DRWN: LROTHAUS 2006/01/09 CHKD: C YORK 2006/01/09 APPR: JPAWLICK 2006/01/10			QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>± ---</td><td>±.0015</td></tr><tr><td>3 PLACES</td><td>± 0.038</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>± 0.13</td><td>±.01</td></tr><tr><td>1 PLACE</td><td>± 0.3</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 2 °</td></tr></table>			mm	INCH	4 PLACES	± ---	±.0015	3 PLACES	± 0.038	±.005	2 PLACES	± 0.13	±.01	1 PLACE	± 0.3	± ---	ANGULAR ± 2 °			DIMENSION STYLE MM/IN DRAWN BY LROTHAUS DATE 12/6/05 CHECKED BY C. YORK DATE 01/06/06 APPROVED BY DATE		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 5.0MM, EURO HEADER, RIGHT ANGLE, MOUNTING	
	mm	INCH																											
4 PLACES	± ---	±.0015																											
3 PLACES	± 0.038	±.005																											
2 PLACES	± 0.13	±.01																											
1 PLACE	± 0.3	± ---																											
ANGULAR ± 2 °																													
A			REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-39526-002		SHEET NO. 1 OF 1																			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																													

