

規格

MICROPHONE SPECIFICATIONS

項目

1. ITEM: SURFACE MOUNT MICROPHONE

型號

2. PART NO.: 2617307

電氣規格

3. ELECTRONICAL SPECIFICATIONS:

3.1 Directional Characteristics : Uni-Directional

3.2 Element : Back Electret-Condenser

3.3 Frequency : 50 Hz ~ 18,000 Hz

3.4 Impedance : $250\ \Omega \pm 30\%$ (at 1,000 Hz)

3.5 Sensitivity : $-68\ \text{dB} \pm 2\ \text{dB}$ (0 dB = 1 V/microbar
1,000 Hz indicated by open circuit)

3.6 Operating Voltage : Phantom Power; 9V-52V D.C.

3.7 Signal to Noise Ratio : Over 65dB (0 dB=1 micro bar)

3.8 Max. Input SPL : 130 dB (1kHz at 1% THD)

機械規格

4. MECHANICAL SPECIFICATIONS:

4.1 Dimension : 83.7(L) x 68.7(W) x 17(H)

4.2 Weight : 141 g (without accessories)

測試規範

5. METHOD OF MEASUREMENT:

According to JIS C-5502


測試儀器

6. TEST INSTRUMENT :

Brüel & Kjær - Type 2012 with digital turntable system

曲線圖

7. FREQUENCY RESPONSE CURVE:

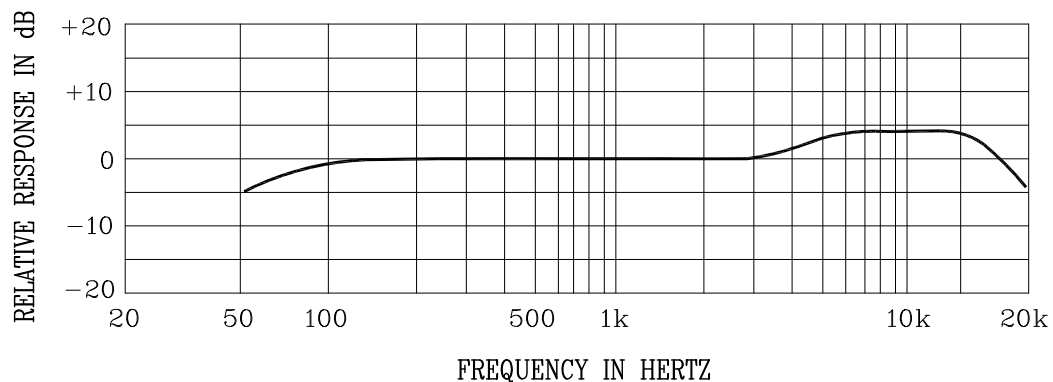

ELECTRET SPEC. CHECKED BY :	MECHANICAL SPEC. CHECKED BY :	PREPARED BY :
-----------------------------	-------------------------------	---------------