

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0026484132

Status:

Active

Overview:

KK® Interconnect System - Molex

Description:

KK® 396 Breakaway Header, Vertical, 13 Circuits, Tin (Sn) Plating, Pin length 30.48mm (1.200")

Documents:

Drawing (PDF)

Product Specification PS-08-50-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

41661

Application

Board-to-Board, Signal, Wire-to-Board

Application Tooling Part Link

11-20-0901

Overview

KK® Interconnect System - Molex

Product Name

KK® 396

UPC

800754905619

Physical

Breakaway

Yes

Circuits (Loaded)

13

Circuits (maximum)

13

Color - Resin

Black

Durability (mating cycles max)

25

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

No

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

Brass

Material - Plating Mating

Tin

Material - Plating Termination

Tin

Material - Resin

Polyester

Net Weight

6.317/g

Number of Rows

1

Orientation

Vertical

PC Tail Length

13.74mm

PCB Locator

No

PCB Retention

None

PCB Thickness - Recommended

1.60mm

Packaging Type

Bag

Pitch - Mating Interface

3.96mm

Pitch - Termination Interface

3.96mm

Polarized to Mating Part

No

Polarized to PCB

No

Shrouded

No

Stackable

Yes

Surface Mount Compatible (SMC)


No

Temperature Range - Operating

See Product Specification

Termination Interface: Style

Through Hole

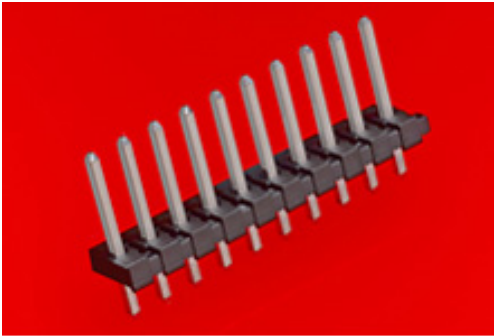

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Not Reviewed

ELV

Not Relevant

RoHS Phthalates

Not Reviewed

Search Parts in this Series

41661 Series

Mates With

2139 KK® Crimp Housing, 41695 KK® Crimp Housing, 6442 KK® Crimp Housing, 2145 PCB Connector, 41815 PCB Connector, 3069 KK® Crimp Housing

Electrical

Current - Maximum per Contact	4.5A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	A-41661-A13R197
--------------------	-----------------

Reference - Drawing Numbers

Product Specification	PS-08-50-001
Sales Drawing	SD-41661-001-002

This document was generated on 04/18/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[26-48-4132](#)