

Ethernet HART multiplexer - GW PL ETH/UNI-BUS - 2702233

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Modular gateway Ethernet head station with Modbus TCP, PROFINET, HART IP, FDT/DTM. Supports five expansion modules.

Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 067049
GTIN	4055626067049
Weight per Piece (excluding packing)	216.900 g
Custom tariff number	85176200
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

General

Degree of protection	IP20
Mounting position	any
Assembly instructions	on standard DIN rail NS 35 in accordance with EN 60715
Mounting type	DIN rail: 35 mm
Color	gray

Serial interface

Interface 1	Bus
Interface 2	Modbus/TCP, HART IP, PROFINET
Connection method	RJ45 socket, auto negotiation and auto crossing

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

Dimensions

Width	22.5 mm
Height	114.5 mm
Depth	99 mm

Ethernet HART multiplexer - GW PL ETH/UNI-BUS - 2702233


Technical data

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2004/108/EC
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D

Drawings

Block diagram

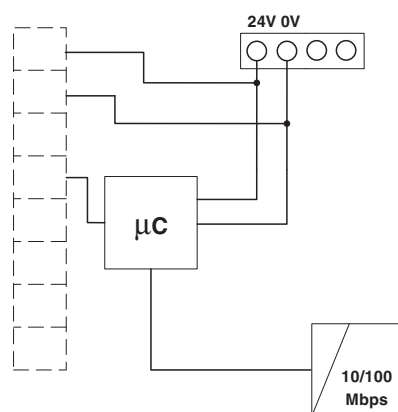

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approval details

UL Listed  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 238705

cUL Listed  <http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 238705

Ethernet HART multiplexer - GW PL ETH/UNI-BUS - 2702233

Approvals

cULus Listed 

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>