
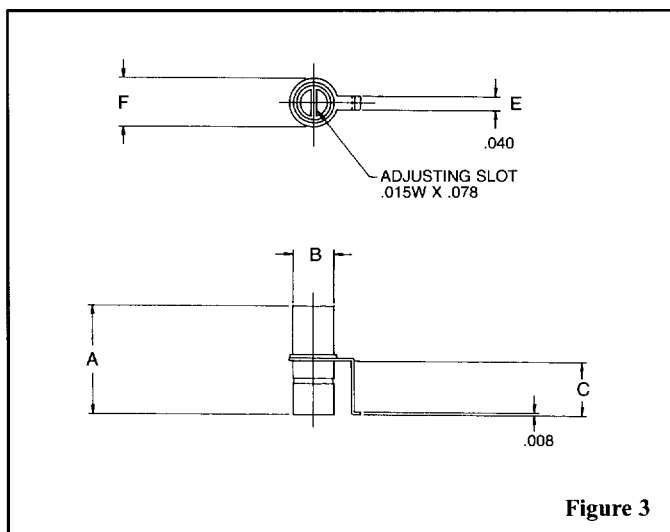
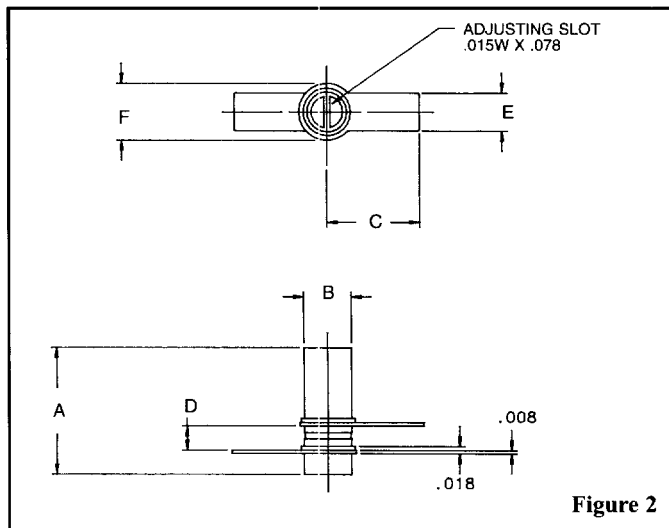


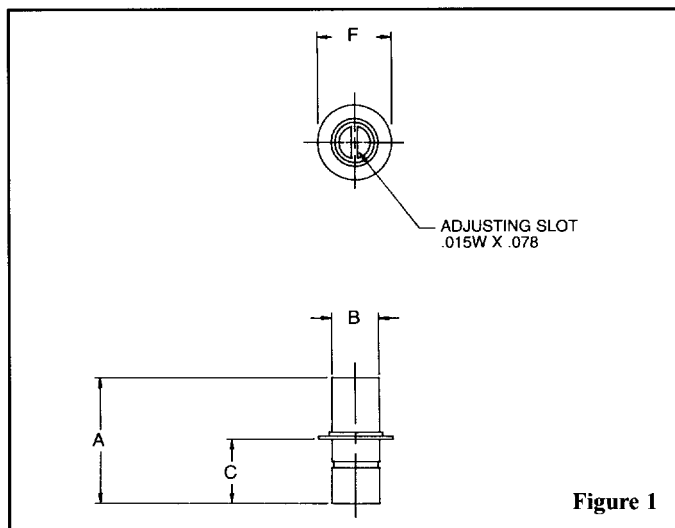

Dimensions: inches

Cap Range (pF)	PN	A	B	C	D	E	F	Fig.
.3-1.2	27263	0.225	0.075	0.09	-	0.040	0.094	3
.3-2.3	47483	0.230	0.118	0.09	-	0.040	0.15	3
.4-2.5	27283	0.225	0.118	0.09	-	0.040	0.14	3
.6-4.5	17273	0.330	0.118	0.16	-		0.15	3
	47273	0.330	0.118	0.16	-		0.15	3
	27273	0.314	0.118	0.16	-		0.14	3
.8-4.5	57283	0.230	0.118	0.09	-	0.093	0.15	3
.8-8.0	57273	0.330	0.118	0.16	-	0.093	0.15	3
.8-8.0	27293	0.480	0.118	0.25	-	0.040	0.14	3
2.0-6.0	47473	0.330	0.118	0.16	-	0.040	0.15	3
.3-1.2	27264	0.225	0.075	0.23	0.056	0.040	0.094	2
.4-2.5	27284	0.225	0.118	0.23	0.056	0.093	0.14	2
.6-4.5	27274	0.314	0.118	0.23	0.060	0.093	0.14	2
.8-8.0	27294	0.480	0.118	0.23	0.051	0.093	0.14	2
.3-1.2	27265	0.225	0.075	0.078	-	-	0.142	1
.4-2.5	27285	0.225	0.118	0.09	-	-	0.185	1
.6-4.5	27275	0.314	0.118	0.16	-	-	0.185	1
.8-8.0	27295	0.480	0.118	0.25	-	-	0.185	1