

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The VARIOFACE feed-through module implements a 1:1 connection between plug-in push-in spring-cage connection terminal blocks and a D-SUB miniature pin strip (number of positions: 9). A separate ground tap is available.



Key commercial data

Packing unit	1 pc
GTIN	 4 046356 709606
Weight per Piece (excluding packing)	333.33 g
Custom tariff number	85369010
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Width	36.5 mm
Height	58.4 mm
Depth	46 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. permissible operating voltage	125 V AC/DC
Max. perm. current (per branch)	2.5 A
Max. permissible current (all branches)	22.5 A
Number of positions	9
Mounting position	any
Assembly instructions	In rows with zero spacing
Degree of protection	IP20
Standards/regulations	DIN EN 50178

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Technical data

General

	IEC 60664
	IEC 62103
Rated insulation voltage	125 V
Rated surge voltage	1.2 kV (Functional insulation)
Pollution degree	2
Surge voltage category	II

Connection data for connection 1

Connection name	Field level
Connection method	Plug-in push-in spring-cage connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	10 mm

Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of positions	9

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
-------------	----------

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Classifications

UNSPSC

UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized 	
mm ² /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

cUL Recognized 	
mm ² /AWG/kcmil	30-12
Nominal current IN	1 A
Nominal voltage UN	125 V

EAC

cULus Recognized 
--

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Accessories

Accessories

System cable

Cable - CABLE-D 9SUB/B/S/ 50/KONFEK/S - 2299987



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m

Cable - CABLE-D 9SUB/B/S/100/KONFEK/S - 2299990



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m

Cable - CABLE-D 9SUB/B/S/150/KONFEK/S - 2300009



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m

Cable - CABLE-D 9SUB/B/S/200/KONFEK/S - 2302010



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m

Cable - CABLE-D 9SUB/B/S/300/KONFEK/S - 2302023



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Accessories

Cable - CABLE-D 9SUB/B/S/400/KONFEK/S - 2302036



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m

Cable - CABLE-D 9SUB/B/S/600/KONFEK/S - 2302049



Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m

Cable - CABLE D-SUB-S/.../.../... - 2302340



Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length

Cable - CABLE D-SUB-B-B-S/.../.../... - 2302421



Shielded round cable, assembled with two D-SUB female connectors, variable cable length

Cable - CABLE-D- 9SUB/F/OE/0,25/S/0,5M - 2926014



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 0.5 m.

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Accessories

Cable - CABLE-D- 9SUB/F/OE/0,25/S/1,0M - 2926027



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/1,5M - 2926030



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 1.5 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/2,0M - 2926043



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 2 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/3,0M - 2926056



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 3 m.

Cable - CABLE-D- 9SUB/F/OE/0,25/S/4,0M - 2926069



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 4 m.

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Accessories

Cable - CABLE-D- 9SUB/F/OE/0,25/S/6,0M - 2926072



Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: 6 m.


Cable - CABLE-D- 9SUB-F-OE-0,25-S/... - 2900903




Shielded cable with a 9-pos. D-SUB female connector and one open end. The individual wires are labeled 1 to 9 and fitted with ferrules. The braided shield is routed to a separate cable end. Cable length: variable.

Drawings

Dimensioned drawing

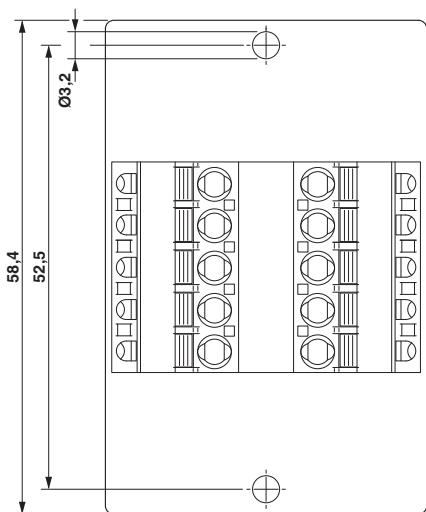


Dimensioned drawing

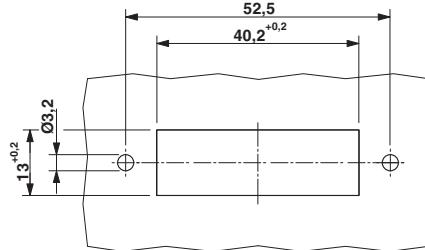

Interface module - DFLK-D 9 SUB/M/FKCT - 2903052

Dimensioned drawing

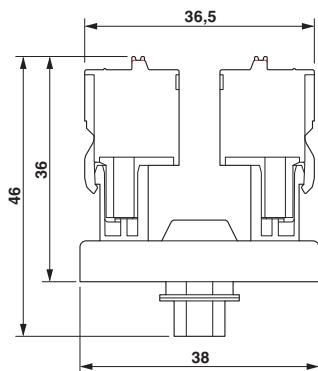

Phoenix Contact 2015 © - all rights reserved
<http://www.phoenixcontact.com>