

CM125-LG/H 35/BO BK

Order No.: 2942904

The illustration shows versions CM 125-LG/H 35/BO/DB/GH

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2942904>

Electronic module, for PCB insertion, with a 35 mm tall covering hood

Commercial data

GTIN (EAN)	4017918080907
sales group	F030
Pack	5 pcs.
Customs tariff	85369010
Weight/Piece	0.322 KG
Catalog page information	Page 601 (CC-2009)

Product notesWEEE/RoHS-compliant since:
03/01/2005

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General**

Housing type	Complete housing
Housing material	Polycarbonate fiber reinforced
Color	black

Dimensions / positions

Length	102 mm
--------	--------


Width	125 mm
-------	--------



Technical data

Ambient temperature (operation)	-40 °C ... 125 °C
Inflammability class acc. to UL 94	V0
Power dissipation at 20°C in the horizontal mounting position	84.4 W 109.7 W



Diagrams/Drawings

Dimensioned drawing

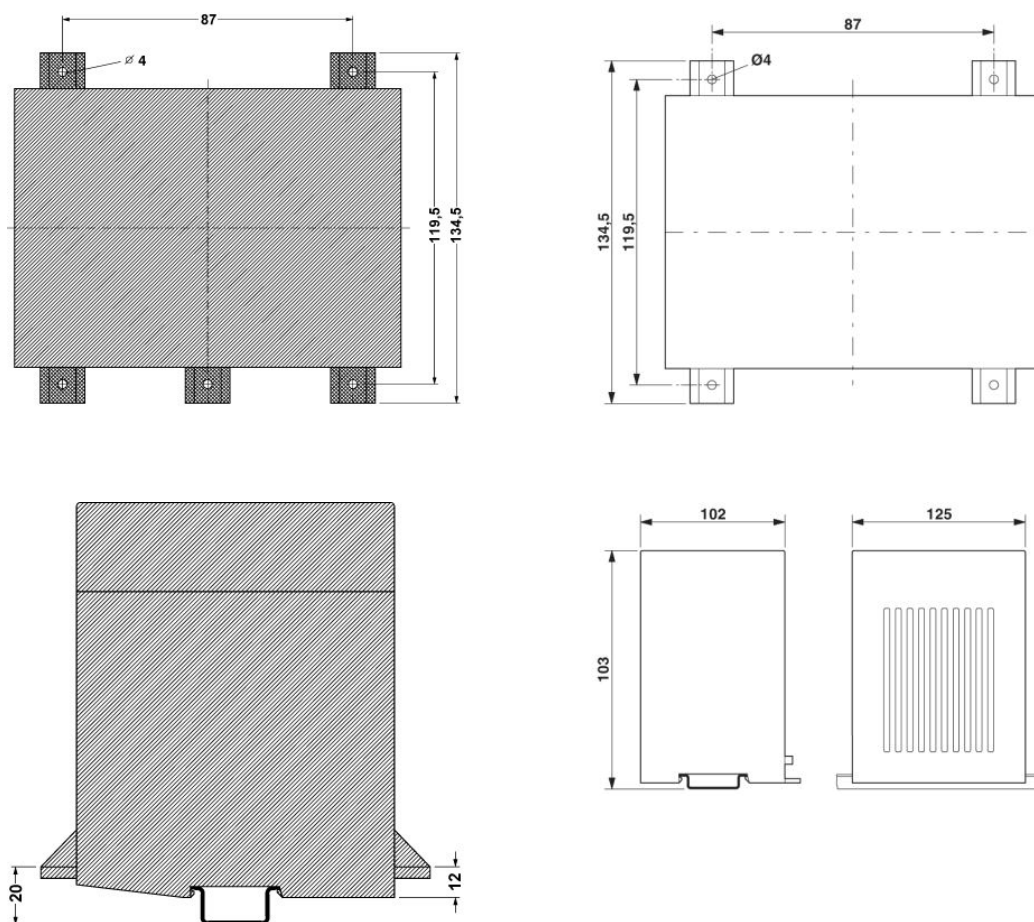


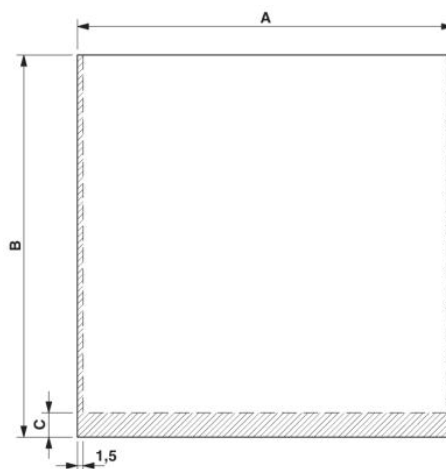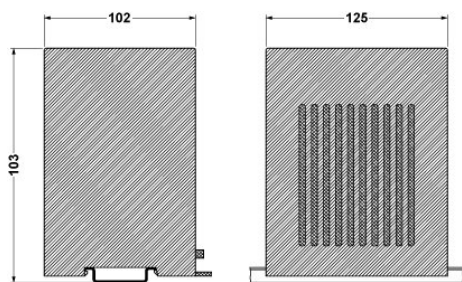


PCB 1, 7: Dimension A: 122.5 mm; B: 124.8 mm; C: 0 mm
 PCB 8, 13: Dimension A: 100.0 mm; B: 124.8 mm; C: 6.5 mm
 PCB 9-12: Dimension A: 100.0 mm; B: 124.8 mm; C: 0 mm

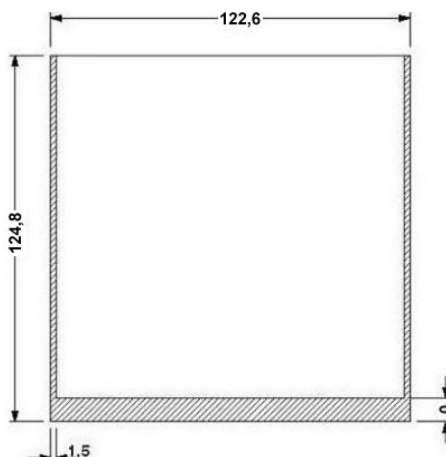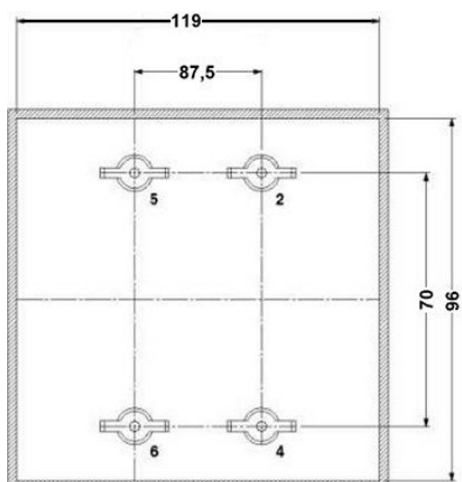

valid for PCB 1 and 7, see explosion drawing

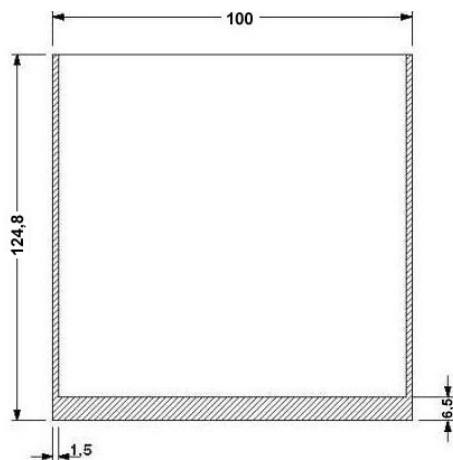


valid for PCB 8 and 13, see explosion drawing

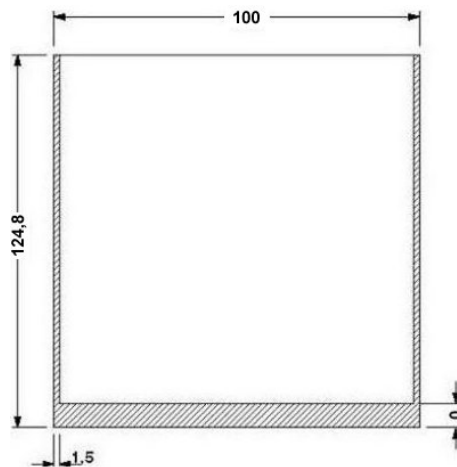

valid for PCB 9 to 12, see explosion drawing

Schematic diagram

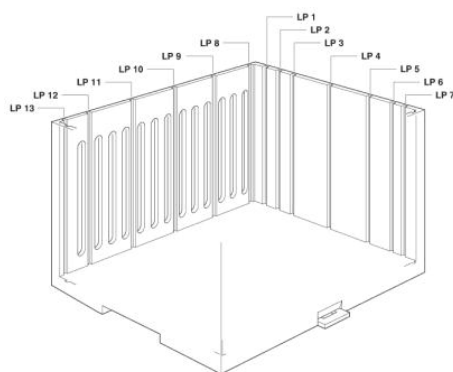

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;