




Mounting hole (inch)	0.4724"
Mounting hole (metric)	12mm
Indicator type	standard
Mounting type	with bezel
Bezel type	prominent
Bezel material	metal
Bezel color	black chrome
Bezel size	M12
Protection	IP40
Lens type	round
Lens color	red diffused
Lens size	8mm
Connector Tpe	leads of LEDs
Connector number	2
Connector for lamp test	no
Number LED chip	1
Indicator color	red
Dom wave length	625nm
Peak Wave Lenght (mA)	
Op. voltage (V)	without resistor
Forward volt max.	
Rectifier	-
AC current	-
DC current	20mA
Lum in min (mcd)	

Drawn : ROJ	Ch'd : ROJ	Datasheet : 192D	Print date : 12/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :

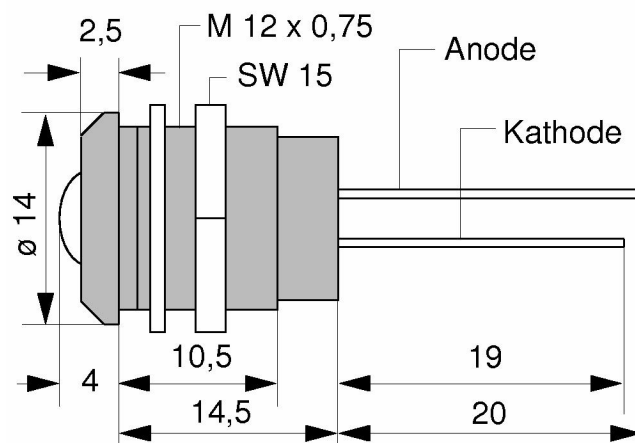

Part Number : 192D1000
Serial Number : 192D
LEDs Indicators

Lum in type (DC)	60mcd
Voltage tolerance (%)	-
Op. temperature (°C)	-25°C...+60°C
Storage temperature (°C)	-25°C...+60°C
Narrative	
Viewing angle (°)	
ROHS Status	Yes

Drawn : ROJ	Ch'd : ROJ	Datasheet : 192D	Print date : 12/09/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :