


HONEYWELL
PART NUMBER

2SE6

FAA-PMA 

REV	DOCUMENT	CHANGED BY	CHECK
13	0007011	KSR 04AUG04	AK

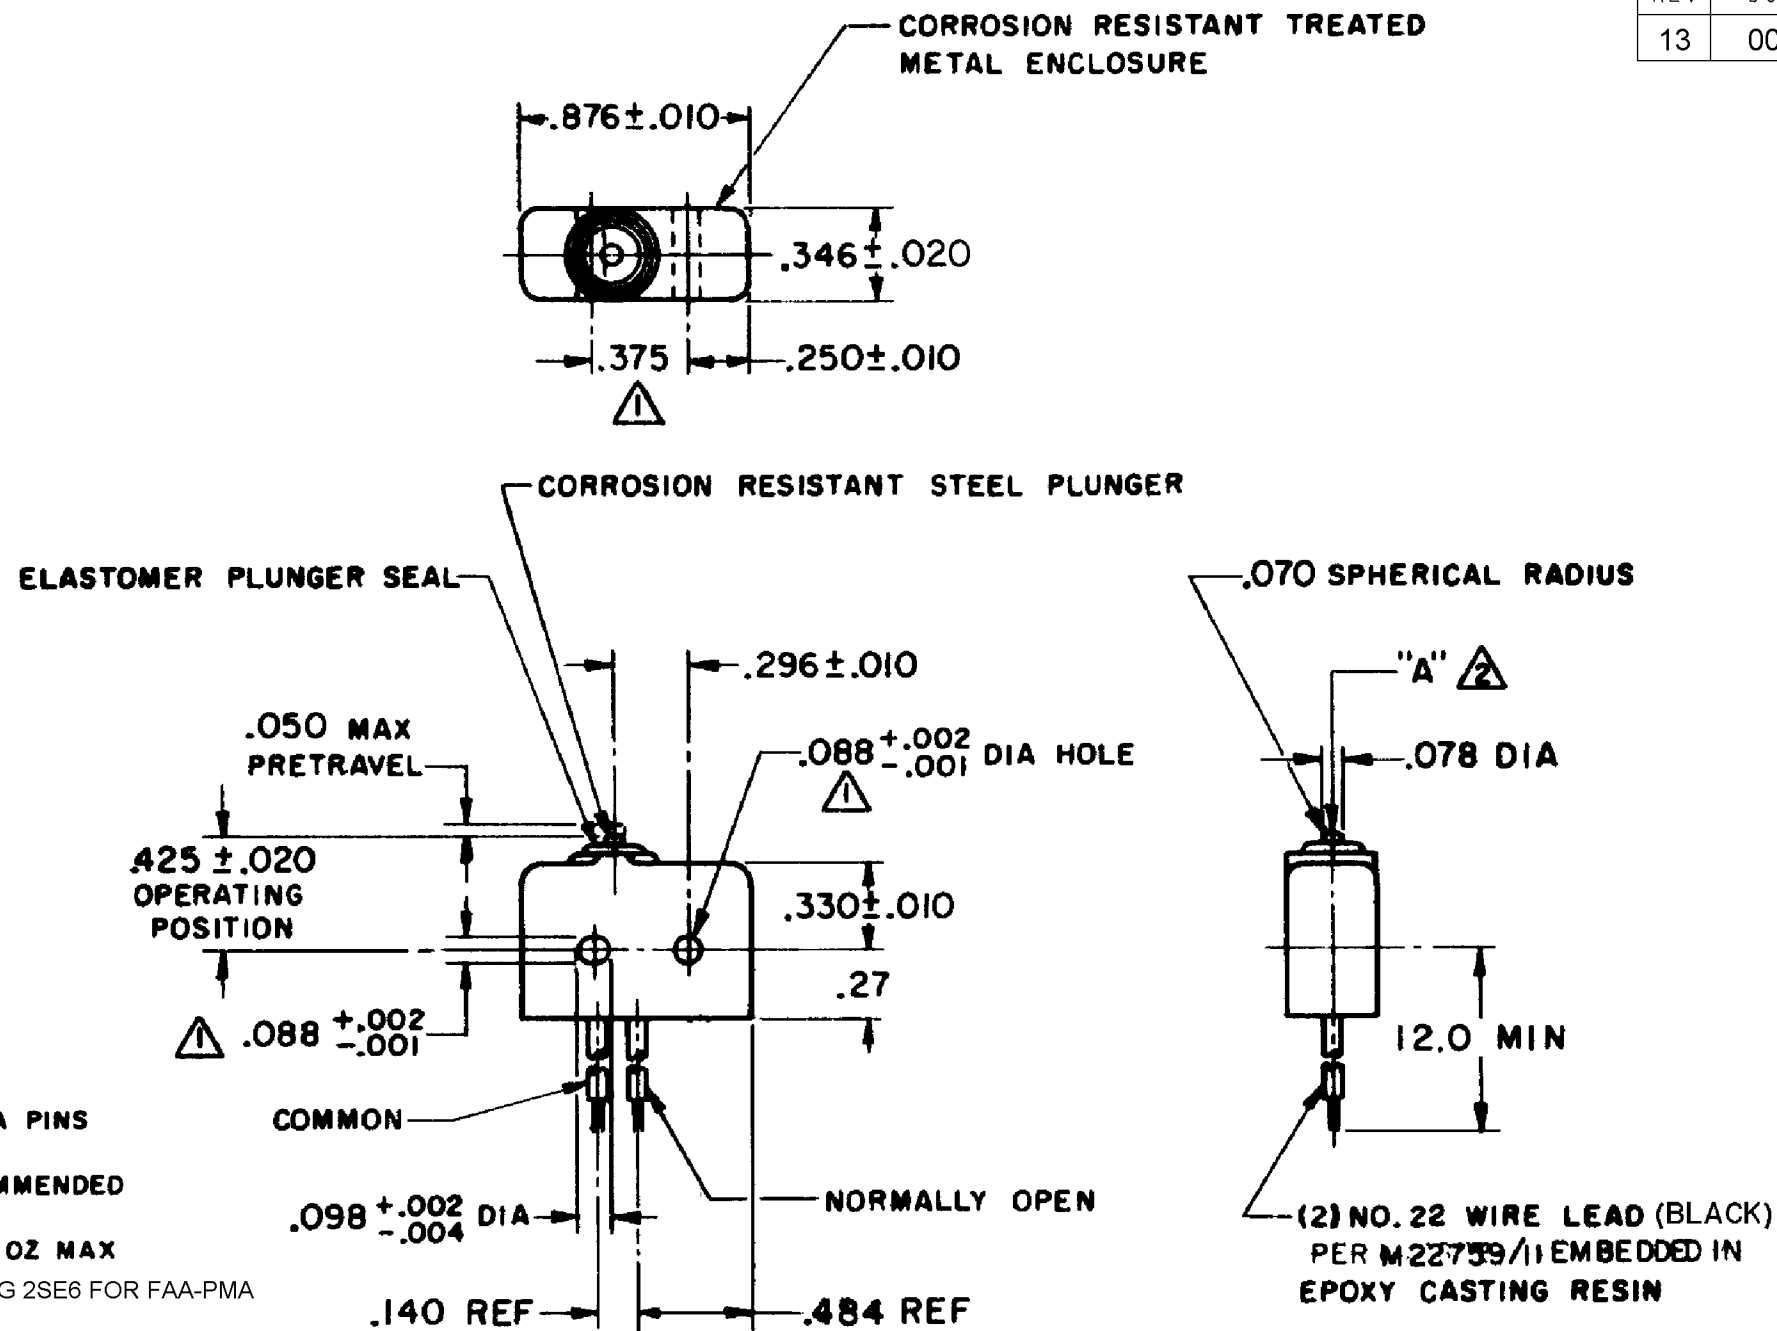

NOTE -

-  MOUNTING HOLES WILL ACCEPT $.087$ MAX DIA PINS OR SCREWS ON $.375 \pm .002$ CENTERS
-  ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
-  WEIGHT OF SWITCH ONLY IS $.26$ OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS $.40$ OZ MAX
-  FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 2SE6 FOR FAA-PMA

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE — — — — — 5-17 OZ	CONTACT ARRANGEMENT S P N O
RELEASE FORCE — — — — — 4 OZ MIN	250 VAC — — — — — 5 AMP
RELEASE TRAVEL — — — — — .004 MIN	30 VOLTS DC RATING
DIFFERENTIAL TRAVEL — — — — — .004 MAX	INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP
OVERTRAVEL — — — — — .003 MIN	50,000 FT — — — 2.5 AMP
	RESISTIVE — — — — — SEA LEVEL — — — 5 AMP
	50,000 FT — — — 5 AMP
	MAXIMUM INRUSH — — — — — 24 AMP

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACE	X	±	0.040
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	0.0005
ANGLES		±	2
THIRD ANGLE PROJECTION			
			

DRAWN	MBF	5APR62
CHECK	DAW	9APR62
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	2SE6	13
SCALE FULL		WEIGHT 	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[2SE6](#)