

ECCOSORB® AN

Flexible Foam Sheet Broadband Microwave Absorbers

Material Characteristics

- Lightweight, flexible, broadband, open-cell, polyurethane foam absorber
- Carbon loaded, laminated polyurethane sheets
- Frequency range from 600 MHz -40 GHz
- Designed to reflect less than -17 dB of normal incident energy above specified frequencies and relative to a metal plate
- Does not support fungal growth per MIL-STD-810E
- Can be readily cut on a band saw, with scissors, die, or a sharp knife

Applications

- ECCOSORB® AN is commonly used for the lining of small test chambers to reduce reflections
- ECCOSORB® AN has been used in reducing crosstalk between adjacent antennas, shrouding antennas to improve the antenna patterns and undesired backlobes, as well as selective shadowing of parts of a target for RCS measurements
- Shadowing of posts and supports in anechoic chambers, and as absorbing blankets for testing radar systems without harm to personnel
- For isolation of components or antennas by means of insertion loss, it can be used without a metal backing

Environmental Properties

- ECCOSORB® AN is *not* waterproof and will not operate correctly when wet. Since there is no washout, ECCOSORB® AN will function as expected after being allowed to dry
- A special CERSEAL coating to prevent moisture uptake in high humidity to moderately wet environments is available on special request
- For waterproof applications, see ECCOSORB® ANW or ECCOSORB® AN can be coated with CERSEAL

Availability

- Standard sheets are 24" x 24" (61 cm x 61 cm)
- Thickness depends upon the lowest desired frequency of operation required
- ECCOSORB® AN is available in other sizes and customer specified configurations, incorporating miter cuts or attachment to metal parts
- Can be manufactured, on special order, on a mandrel, to take a contoured shape.

Instructions for Use


- To obtain low reflectivity, the absorbers must be mounted on a metal surface. If a metal surface is not available, ECCOSORB® AN can be supplied metal backed with aluminum foil (ML)
- Layering of multiple pieces or slicing off part of the thickness will degrade the overall performance
- Reflectivity performance also degrades for off-normal bistatic incidence and at different rates for different polarizations
- ECCOSORB® AN can be securely bonded to itself or to other materials such as metal, wood, and common plastic composites. The recommended adhesive is ECCOSTOCK® 13-111-NF.

Typical Properties

Front Surface Color (facing oncoming EMI)	White
Max. Service Temperature, °F (°C)	248 (120)
Power Handling, W/cm ²	0.15
Thermal Conductivity, cal-cm/sec- cm ² -°C	6.8 x 10 ⁻⁵
Fire Retardancy	UL 94 HBF

	Reflectivity range (>17 dB)	Thickness Inch (cm)	Weight lb/piece (kg/piece)	Density oz/in ³ (g/cm ³)
AN-72	>20 GHz	0.24 (0.6)	0.6 (0.25)	0.06 (0.11)
AN-73	>7.5 GHz	0.39 (1.0)	1.1 (0.50)	0.08 (0.13)
AN-74	>3.5 GHz	0.75 (1.9)	1.5 (0.70)	0.06 (0.10)
AN-75	>2.4 GHz	1.14 (2.9)	1.8 (0.80)	0.04 (0.07)
AN-77	>1.2 GHz	2.24 (5.7)	3.3 (1.50)	0.04 (0.07)
AN-79	>600 MHz	4.49 (11.4)	6.5 (2.95)	0.04 (0.07)

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.

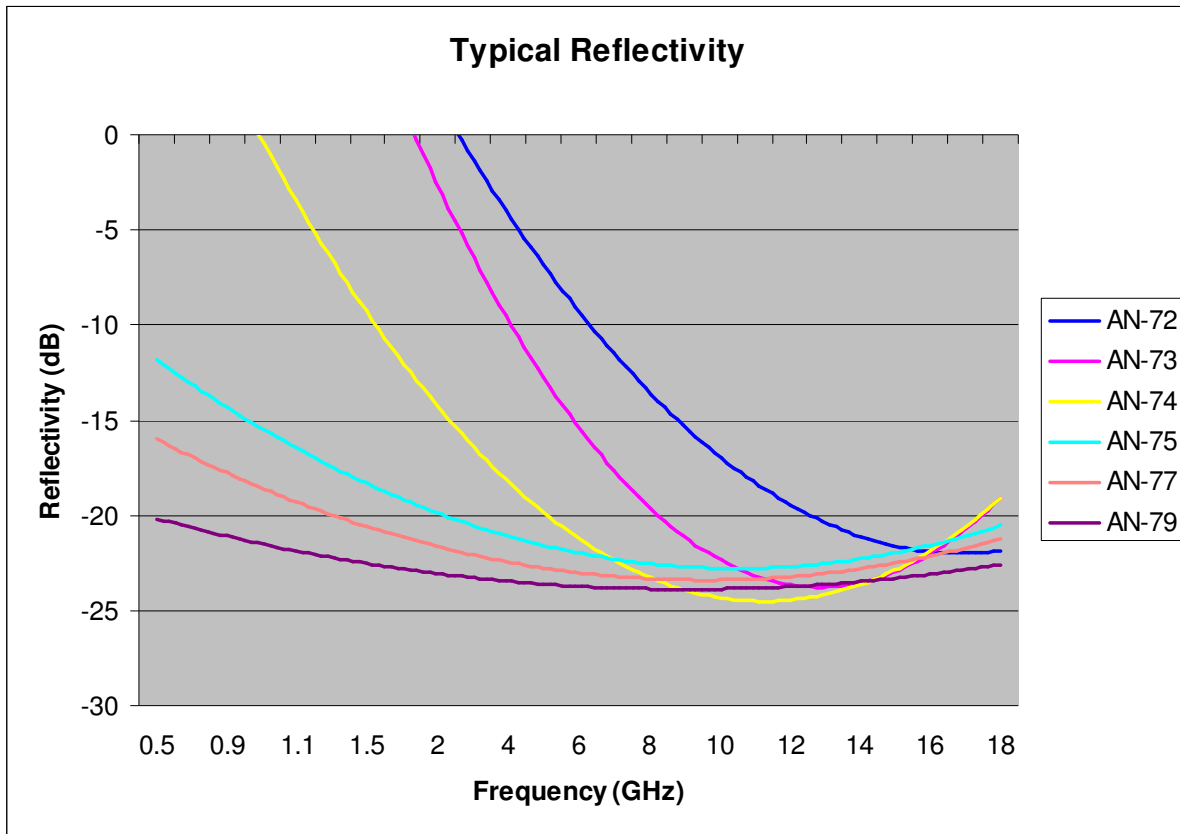

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird Technologies:

[301005001](#) [301003001](#) [301001001](#) [301004001](#) [301006001](#) [301002001](#)