

U.I. Lapp GmbH	DATASHEET	
	SKINTOP® ST	53015220 14.11.2013

Various accessories (e.g. multiple sealing inserts)
 High oil-resistance for maximum reliability
 Permanent vibration protection
 Optimum strain relief
 Wide, variable clamping ranges




Good chemical resistance



Wide clamping range



Mechanical resistance



Optimum strain relief



Temperature-resistant



Variety of approval certifications



Application range

Used in areas where cables and wires need to be safely inserted into housings
 Machine and equipment manufacturing
 Photovoltaic
 Automation technology

Design

PG connection thread

Norm references / Approvals

UL File Nr. E79903

Note

Refer to SKINTOP® PG accessories for suitable accessories
 Counter nut to be used: SKINTOP® GMP-GL

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Product Management	Document: SKINTOP® ST	1 / 3
--------------------	-----------------------	-------


U.I. Lapp GmbH	DATASHEET	 LAPP GROUP
	SKINTOP® ST	53015220 14.11.2013

Technical Data

Article designation / size:	ST 11
Clamping range ØF (mm):	4 - 10
SW (mm):	22
Overall length, C (mm):	38
Thread length, D (mm):	8
Pieces / PU:	100
Caution:	Refer to Appendix T21 for the installation dimensions and torques
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Body: Polyamide Seal: CR
Tests:	GGVS: TÜ.EGG.020-95
Protection rating:	IP 68 - 5 bar
Temperature range:	-20°C to +80°C

Product Management	Document: SKINTOP® ST	2 / 3
--------------------	-----------------------	-------

U.I. Lapp GmbH	DATASHEET	 LAPP GROUP
	SKINTOP® ST	53015220 14.11.2013

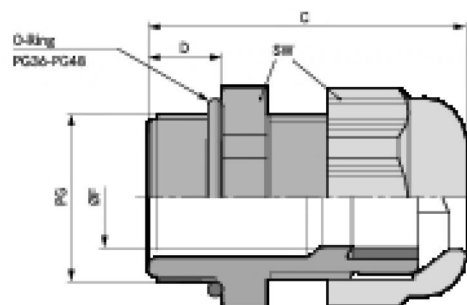

Product Management	Document: SKINTOP® ST	3 / 3
--------------------	-----------------------	-------

U.I. Lapp GmbH	DATASHEET	 LAPP GROUP
	SKINTOP® GMP-GL	53019220 14.11.2013

Glass fibre-reinforced for maximum mechanical stability
Supporting surface for spanner means scratches on the housing are avoided



Assembly time



Temperature-resistant



Variety of approval certifications



Application range

For locking SKINTOP® cable glands in boreholes without thread.

Design

PG connection thread

Norm references / Approvals

UL File Nr. E79903

Note

UL approval only when used with the UL-approved SKINTOP® polyamide cable glands
Designed for use with SKINTOP® ST(R)

Remark


Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Article designation / size:	GMP-GL 11
SW (mm):	24
Pieces / PU:	100
On request:	Available without collar (without surface for assembling tool)
Colour delivered:	Silver grey (RAL 7001) Light grey (RAL 7035) Black (RAL 9005), UV-resistant
Material:	Polyamide, glass fibre-reinforced
Temperature range:	-20°C to +100°C

Product Management	Document: SKINTOP® GMP-GL	1 / 2
--------------------	---------------------------	-------

U.I. Lapp GmbH	DATASHEET	 LAPP GROUP
	SKINTOP® GMP-GL	53019220 14.11.2013

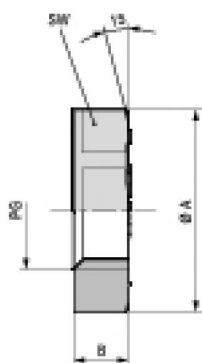

Product Management	Document: SKINTOP® GMP-GL	2 / 2
--------------------	---------------------------	-------