

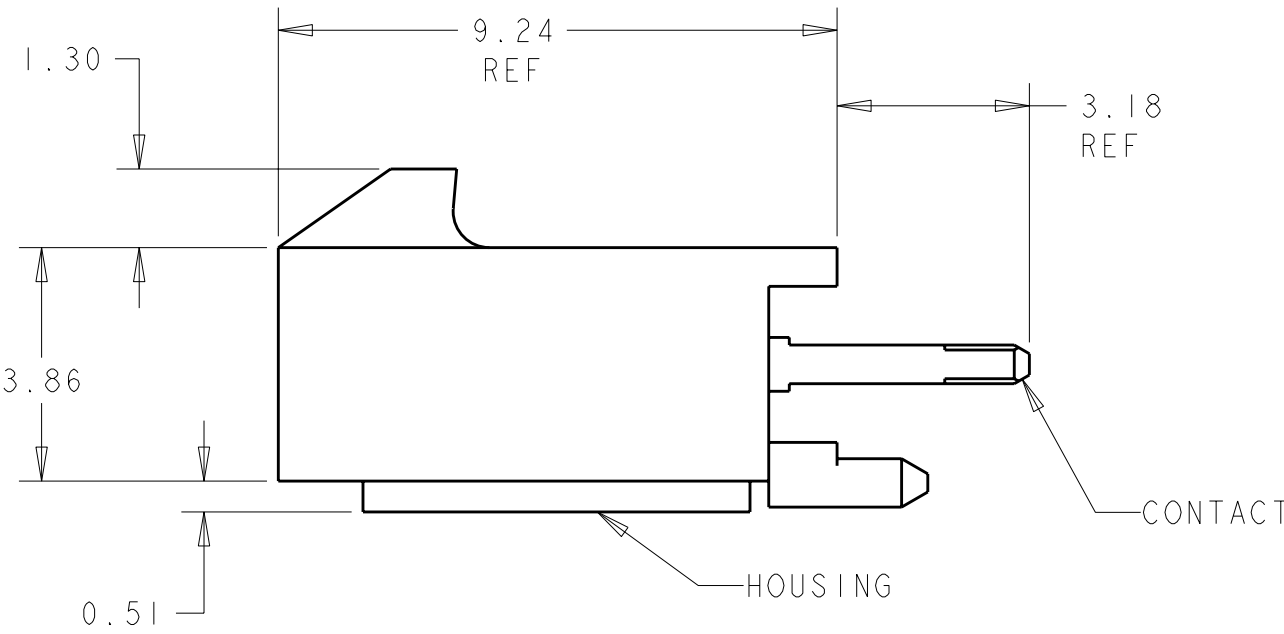
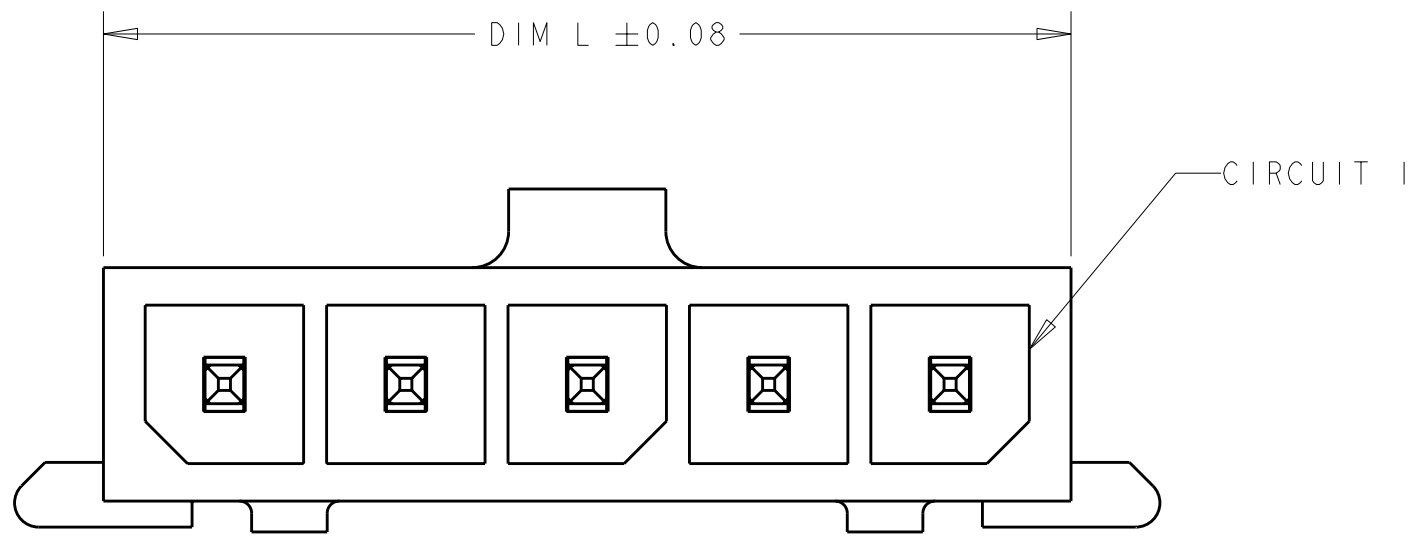



LOC		DIST		REVISIONS						
CM	00	P	LTR	DESCRIPTION			DATE	OWN	APVD	
			B1	REVISED PER ECR-12-007353			18MAY2012	KH	TM	

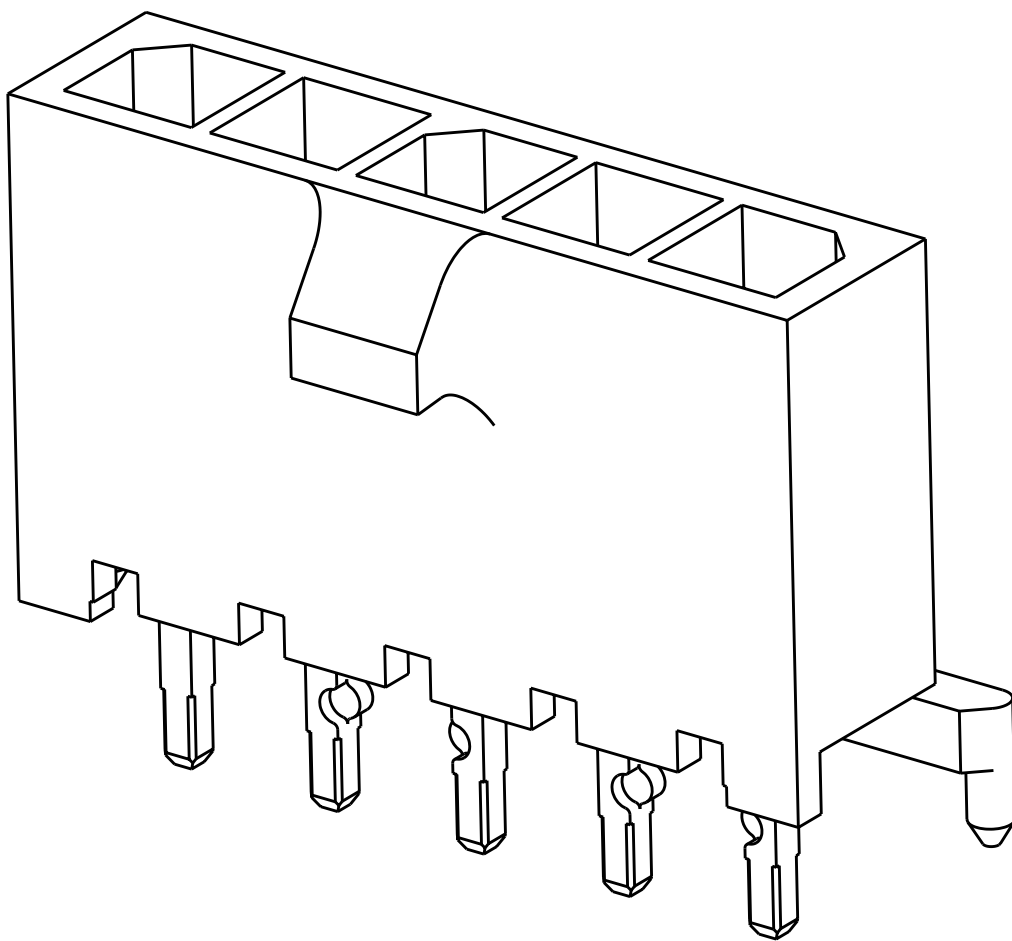

- 1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
- 2 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,
2.54µm MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 RETENTION BUMP FEATURES FACE EACH OTHER, TYPICAL
ALL CONFIGURATIONS.
- 6 PLATING: CONTACTS - 0.76µm MINIMUM GOLD ON MATING END,
2.54µm MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27µm MINIMUM NICKEL.

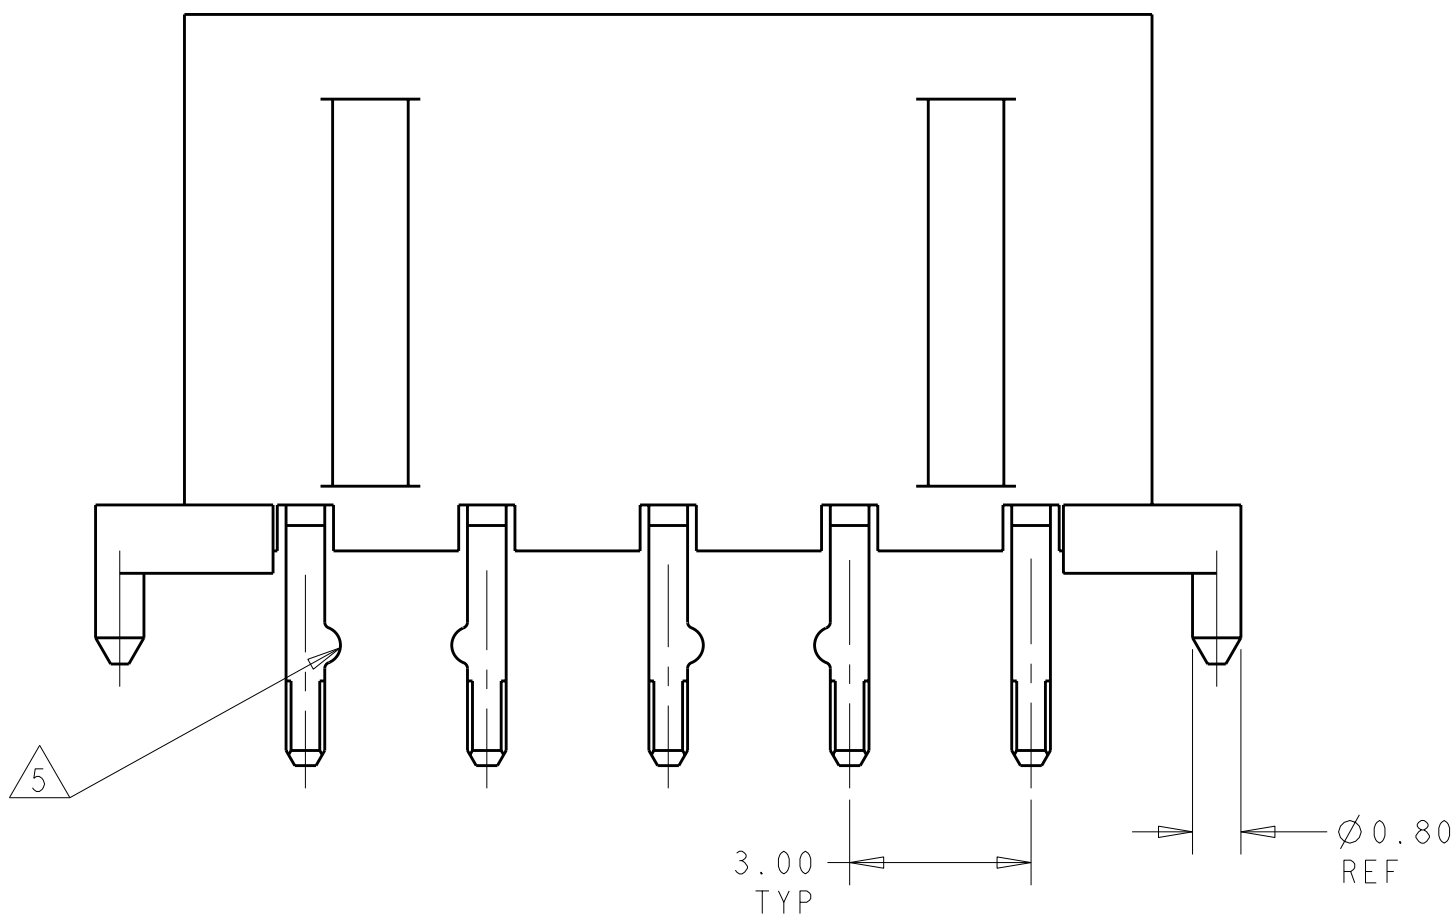

6	1, 2, 11, 12	33.00	39.14	37.00	12	3-1445093-2		
6	1, 2, 9, 10	30.00	36.14	34.00	11	3-1445093-1		
6	1, 2, 9, 10	27.00	33.14	31.00	10	3-1445093-0		
6	1, 2, 7, 8	24.00	30.14	28.00	9	2-1445093-9		
6	1, 2, 7, 8	21.00	27.14	25.00	8	2-1445093-8		
6	1, 2, 5, 6	18.00	24.14	22.00	7	2-1445093-7		
6	1, 2, 5, 6	15.00	21.14	19.00	6	2-1445093-6		
6	1, 2, 3, 4	12.00	18.14	16.00	5	2-1445093-5		
6	1, 2, 3, 4	9.00	15.14	13.00	4	2-1445093-4		
6	1, 2	6.00	12.14	10.00	3	2-1445093-3		
6	1, 2	3.00	9.14	7.00	2	2-1445093-2		
2	1, 2, 11, 12	33.00	39.14	37.00	12	1-1445093-2		
2	1, 2, 9, 10	30.00	36.14	34.00	11	1-1445093-1		
2	1, 2, 9, 10	27.00	33.14	31.00	10	1-1445093-0		
2	1, 2, 7, 8	24.00	30.14	28.00	9	1445093-9		
2	1, 2, 7, 8	21.00	27.14	25.00	8	1445093-8		
2	1, 2, 5, 6	18.00	24.14	22.00	7	1445093-7		
2	1, 2, 5, 6	15.00	21.14	19.00	6	1445093-6		
2	1, 2, 3, 4	12.00	18.14	16.00	5	1445093-5		
2	1, 2, 3, 4	9.00	15.14	13.00	4	1445093-4		
2	1, 2	6.00	12.14	10.00	3	1445093-3		
2	1, 2	3.00	9.14	7.00	2	1445093-2		
FINISH		CON POS W/RET BUMP	5	DIM Z	DIM V	DIM L	NO. OF POSN	PART NUMBER

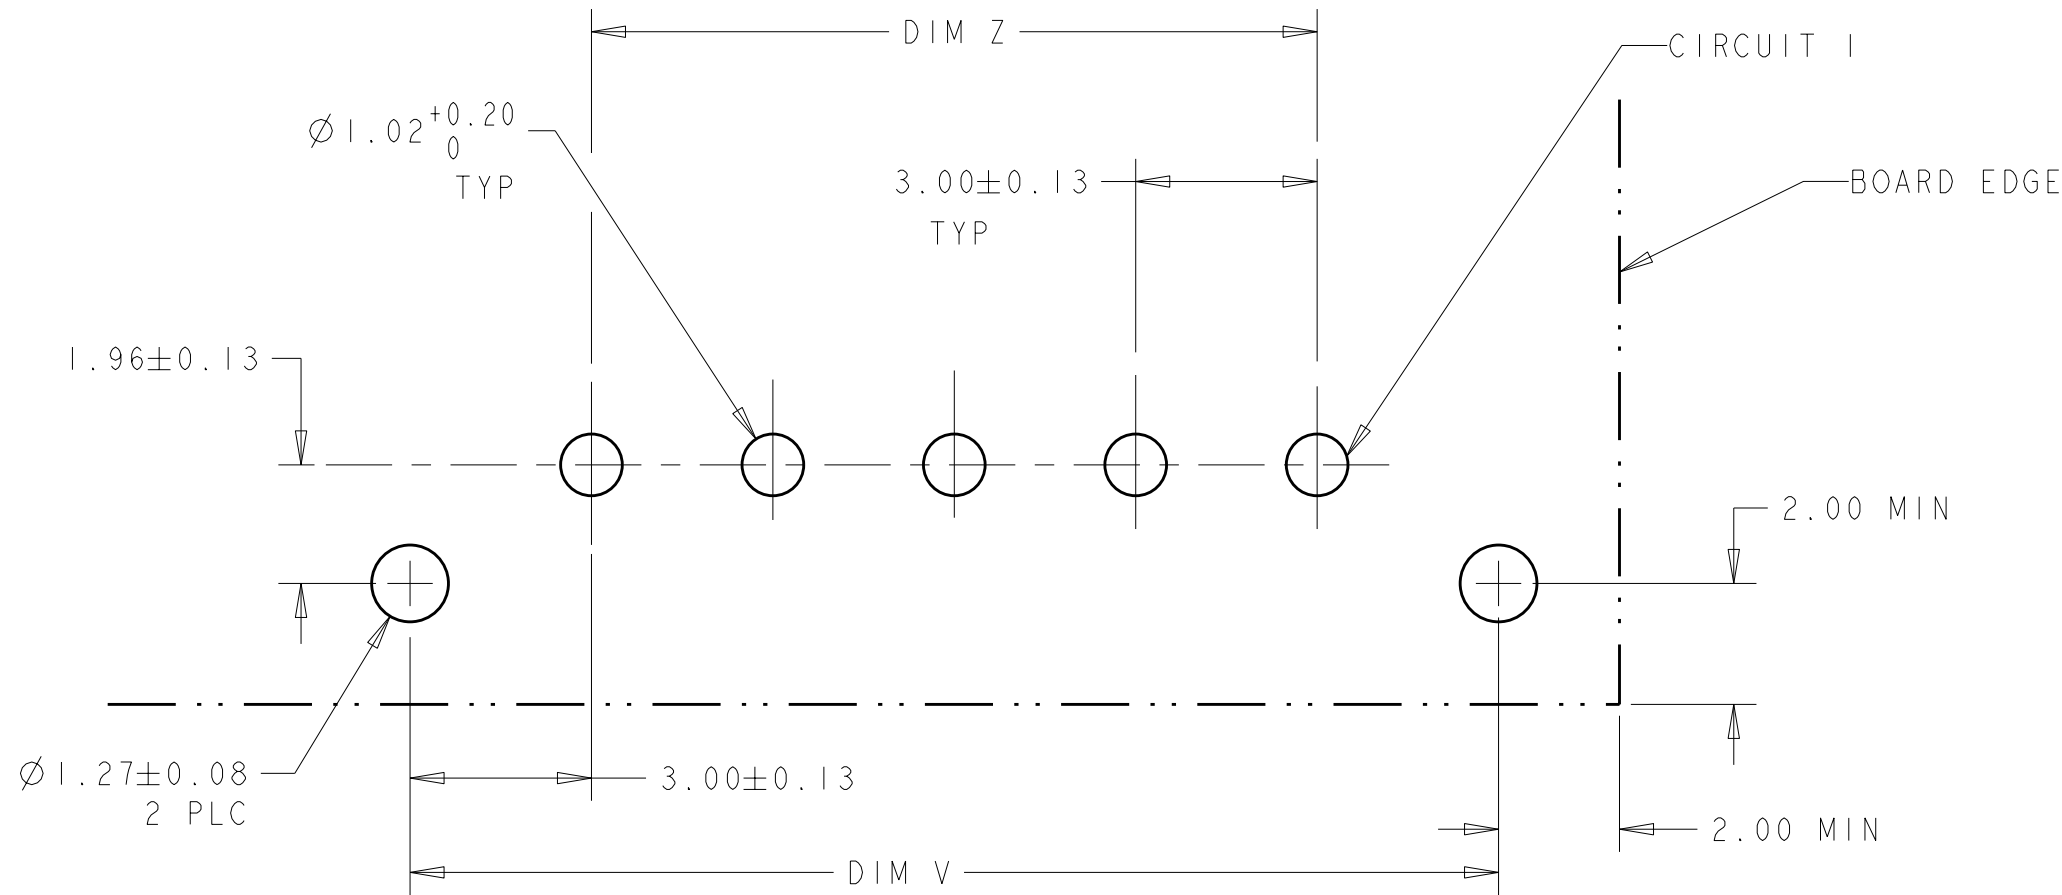

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. ROOT	10OCT2000	TE Connectivity	
DIMENSIONS:		CHK K. WHITAKER	17-APR-2001		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. JONES	17-APR-2001	NAME	
mm		PRODUCT SPEC		VERTICAL THRU HOLE HEADER ASSY,	
9 PLC ±		APPLICATION SPEC		0.76 MIC GOLD CONTACTS, W/PCB PLZN	
1 PLC ±		WEIGHT		FEATURE, SGL ROW, MICRO MATE-N-LOK(TM)	
2 PLC ±		CUSTOMER DRAWING		SIZE CAGE CODE DRAWING NO	
3 PLC ±		SCALE 8:1		RESTRICTED TO	
4 PLC ±		SHEET 1 OF 1		REV B1	
ANGLES ±					
MATERIAL					
FINISH					