



LOC				REV			
6	14	P	#	ZONE	LTR	DESCRIPTION	DATE
						REVISED PER 0720-0230-93	2/20/94

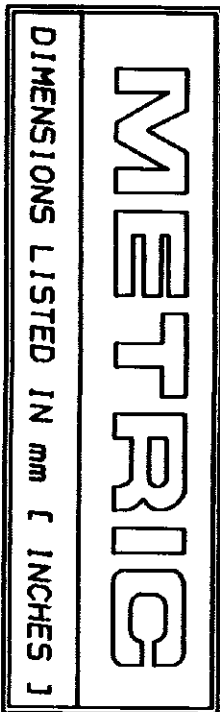

WIRE RANGE		E13288 Listed	
22-16 AWG STRANDED		22-16 AWG STRANDED	
LR7189 Certified		MILITARY P/N AND CLASS	
NOT CERTIFIED		NOT APPLICABLE	

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

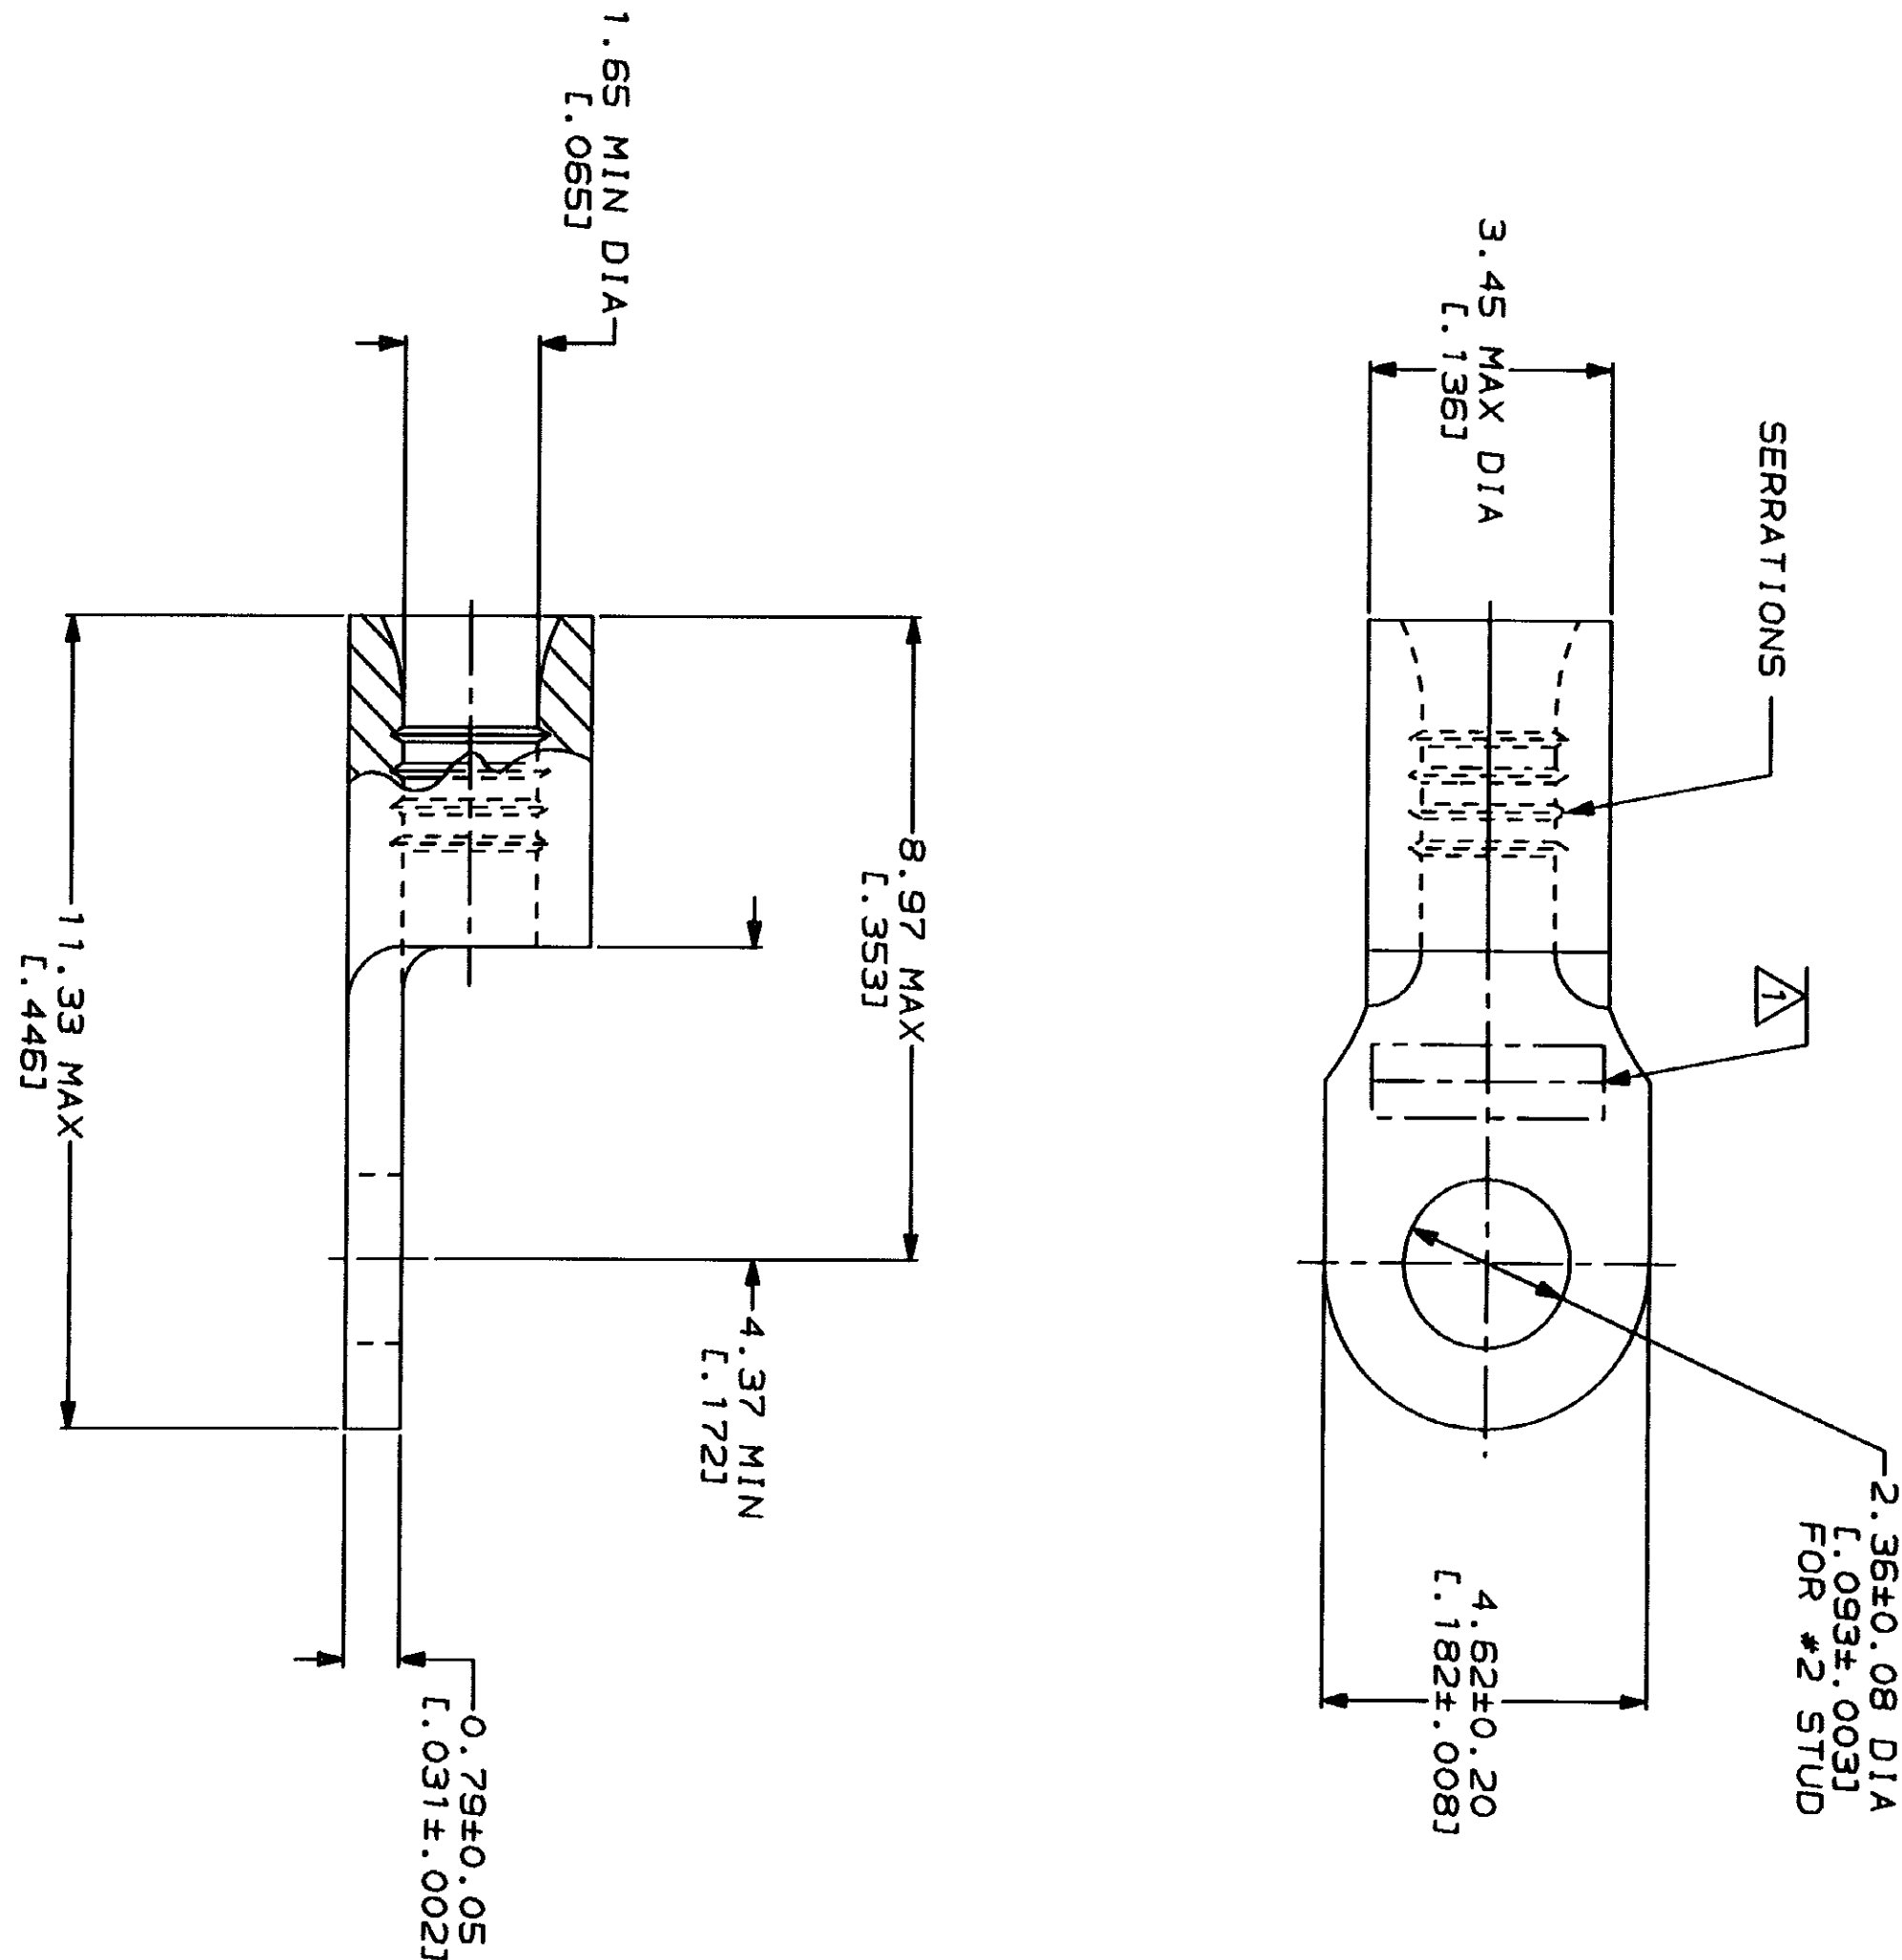

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN mm [INCHES]
TOLERANCES ON:
2 PLG DEC ± .005
3 PLG DEC ± .005
ANGLES
MATERIAL
COPPER PER
ASTM B-152
ANNEALED

DR 2-2-93
TA BRILKMAN
CHK 2-2-93
DA PATTERSON
APPO 2-2-93
DE MILLER
APPO 2-2-93
JL NECKLEY
PRODUCT SPEC

AMP
AMP Incorporated
Harrisburg, PA 17105-3608

TERMINAL, RING TONGUE,
BUDGET

FINISH
TIN PLATE
0.00254 [1.000100] MIN
THK PER MIL-T-10727

APPLICATION SPEC
WEIGHT

SIZE
CAGE CODE
00779
DRAWING NO
C-320677

SHEET
1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[320677](#)