


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 38497	08/11	PJS

SV P/N	INTERFACE
3211-60086	SMOOTH BORE
3211-60087	FULL DETENT

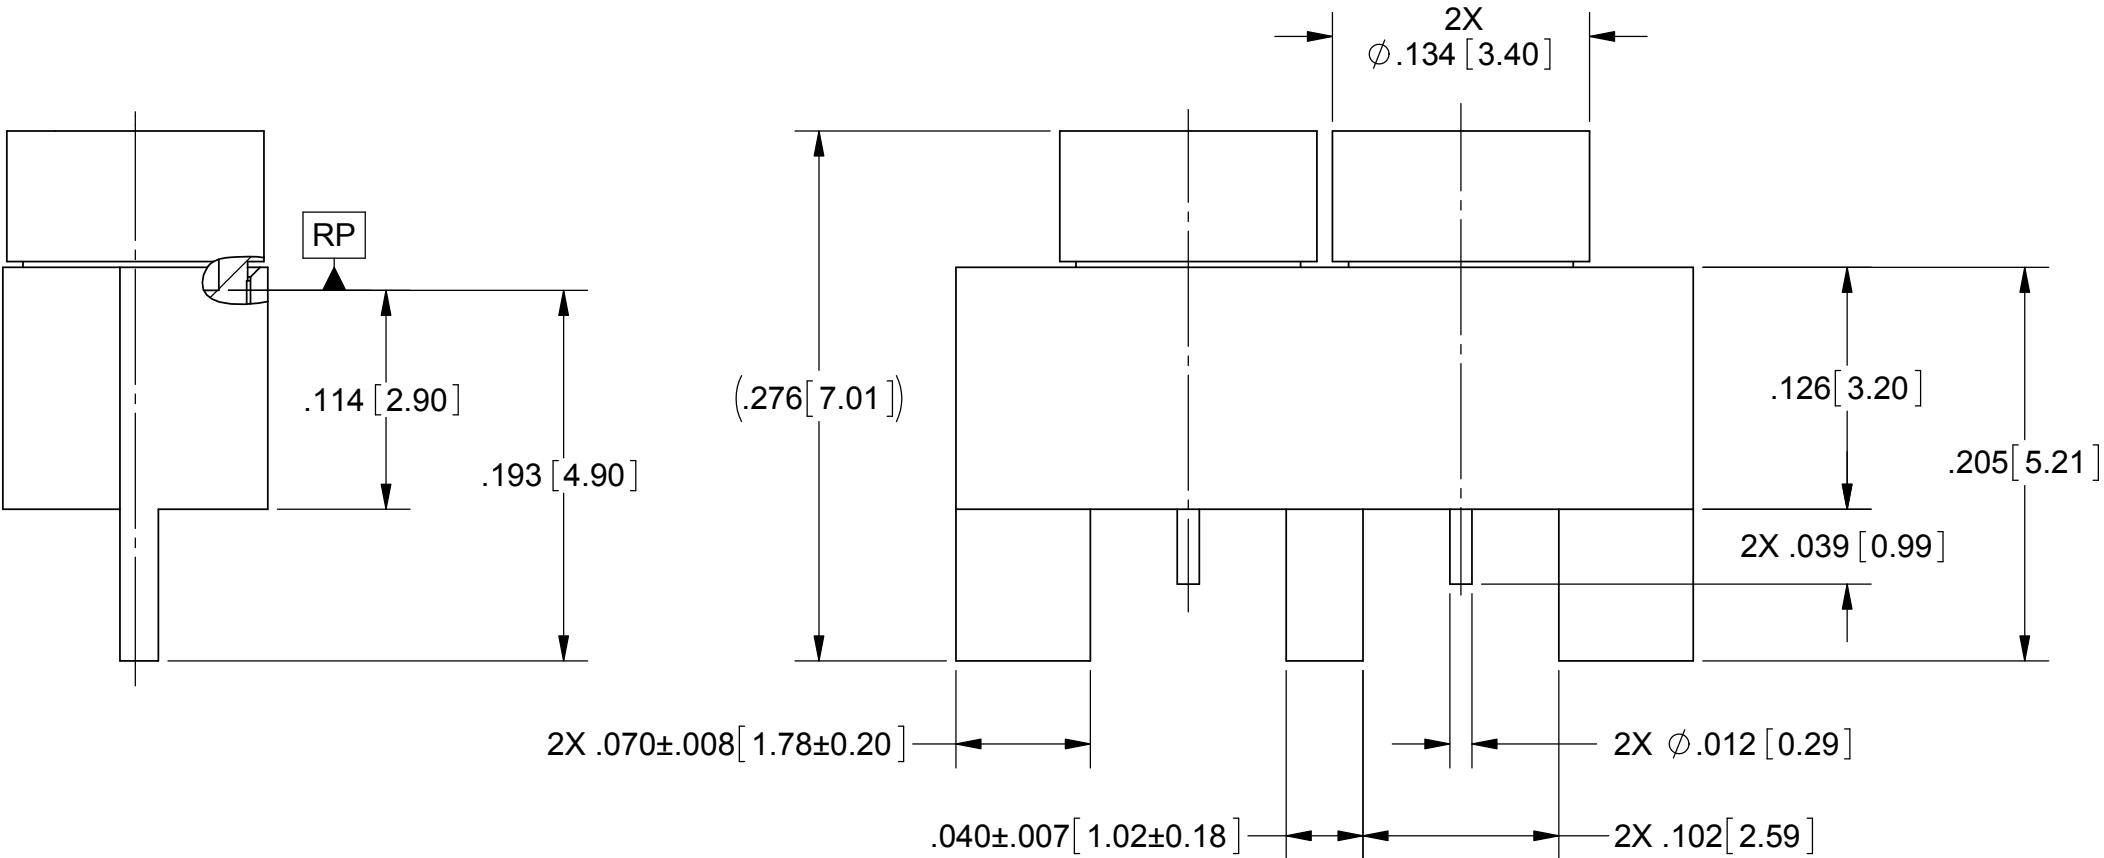

MATERIAL:

BODY & SHROUDS:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
CONTACTS:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
INSULATORS:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B


FINISH:

BODY, SHROUDS, & CONTACTS:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
----------------------------	--

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 65 GHz
RETURN LOSS:	35dB DC TO 15.0GHz 23dB 15.0 TO 25.0GHz 20dB 25.0 TO 40.0GHz
INSERTION LOSS:	.10 X SQRT(F(F IN GHz))

SHROUD TO BODY RETENTION:	8 LBS MIN (AXIAL)
---------------------------	-------------------

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409			
FINISH:	SEE NOTES			TITLE:	SMPM MALE 2-PORT EDGE LAUNCH		
SURFACE AREA:	N/A						
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION 	DRAWN:	FED 08/25/11			
			CHECKED:	PJS 08/25/11			
			APPROVED:	PJS 08/25/11			
			SIZE	CAGE CODE	DWG. NO.		
			B	95077	3211-60086-60087		
			SCALE: 10:1		SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[3211-60086](#) [3211-60180-TD](#) [8050-0403](#) [3211-60180](#) [3211-40032](#)